2021 - 2022 General Product Guide

evimetal
drain & profile

54th year

smart solutions for your ideas

By evimetal design centre

DESIGN AWARD 2018

DESIGN TURKEY 2017 Good Design Award

The name of stainless steel products

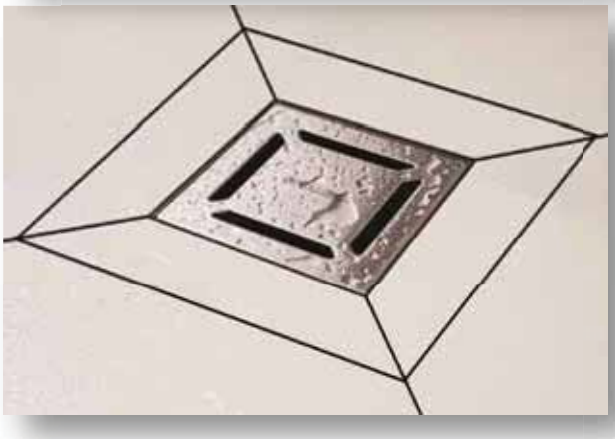

Shower Drains

Finishing Profile

Towelrails

WallLine

SlimLine

Balcony Drain

Floor Drains

Decorative Profiles

Hadımköy Plant Area (14.000 m²)

İsmail Altunç : Founder 1967

The name of stainless steel bathroom products evimetal®

Evimetal is a leading company in the inox bathroom products sector. Since 1967, it has been engaged in the manufacture and design of stainless molds. For the last fifteen years, Evimetal has been producing shower channels, drains, corner - finish profiles and towel radiators.

Evimetal has many advantages offered by a well-organized and qualified production force. An in-house design team who has won awards in both national and international competitions, along with a dedicated sales team and its references play a significant role in Evimetal's success. The quality of our products is guaranteed through the use of certified, first class grade 304 stainless steel.

Products conforming to BSCI-CE standards represent Evimetal's sense of quality. This has been achieved with the assistance of state-of-the-art technology, an integrated production facility, and R&D studies conducted for production process and product functionality (ISO 9001-2008 Quality system certificate).

Best solutions to your architectural projects

Evimetal offers special solutions to your projects with its ceramic profiles and shower drains. With its eye-catching designs Evimetal decorative and technical profiles maintain perfect and smooth finishes where ceramic tiles meet the profiles.

Shower drain systems that have high evacuation capacity also satisfy all your needs. You'll create your own differences in your bathrooms with unique designs of products such as floor drain, wall drain, balcony & terrace drain.

Some details to create unique solutions in your bathrooms:

√ Wide range of designs/styles

√ Perfect finishes after installation

√ Colour alternatives

√ 1st quality stainless steel material

√ Inclined profiles for tilted surfaces

√ Product sets for adjustable heights

Prodiline / page : 8-19

Perfect match for new constructions and renovation projects

Evimetal shower drains with highly qualified features satisfy variety of needs. With its different dimension, colour and trap options; Evimetal offers more than what's expected for new constructions, renovation projects and even with limited spaces. You may also choose among many cover plate alternatives compatible with your own tiles and create harmony in your bathrooms.

30
40
50
60
70
80
90

WallLine / page : 20-27

Cuttable cover and frame

Cover and frame is cuttable in the desired dimensions between 30 to 100 cm gives flexibilty to have tailor made dimensions for your projects. WallLine cover is manufactured in Satin color, on your project based requests other color alternatives could be manufactured.

60
100

TrendLine / page : 28-37

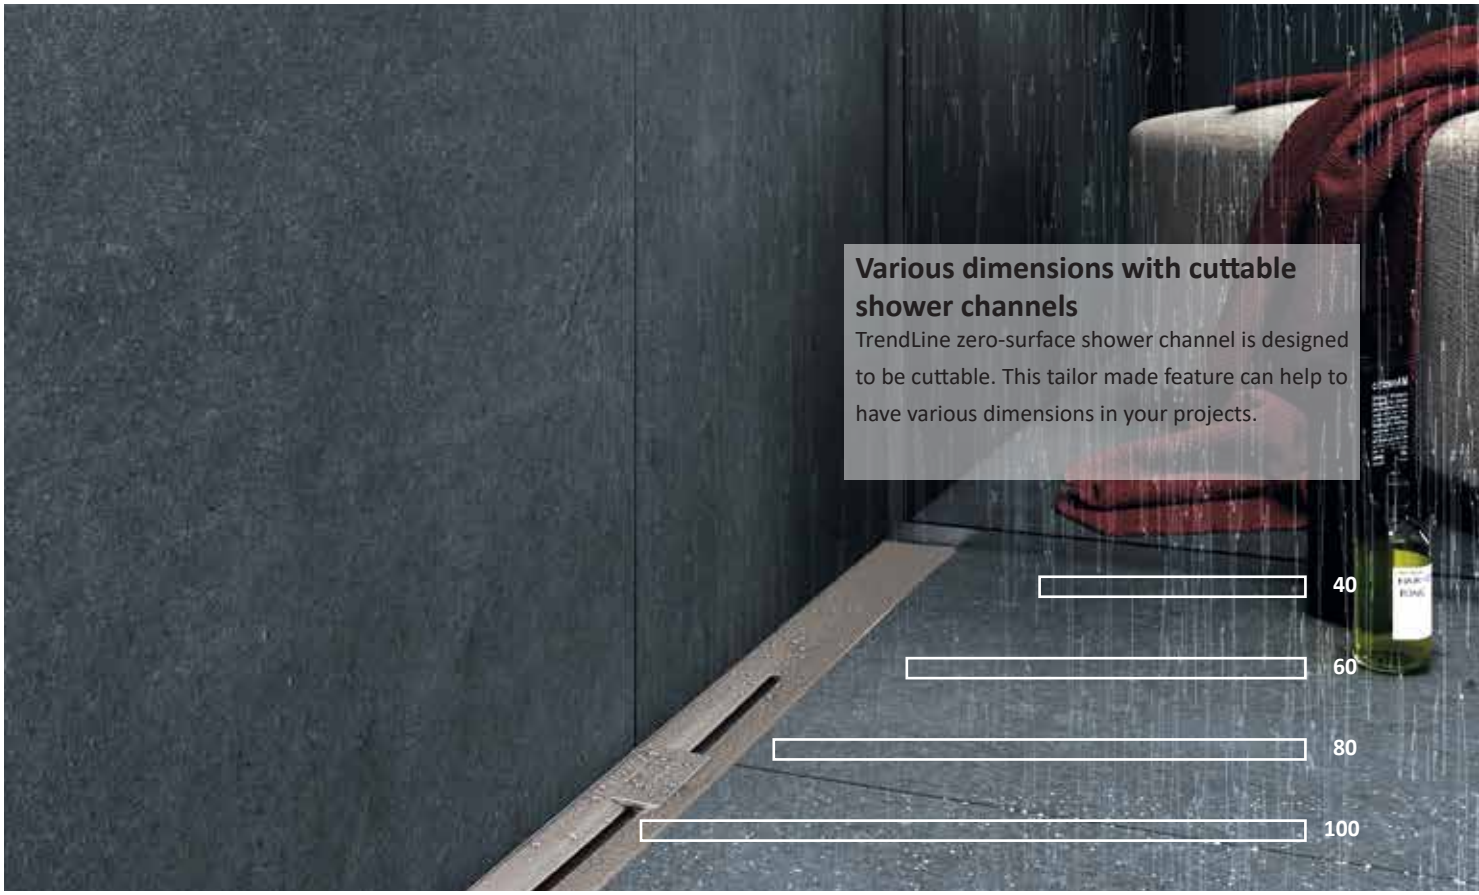

SlimLine / page : 38-41

SlimLine linear channel / page : 42-47

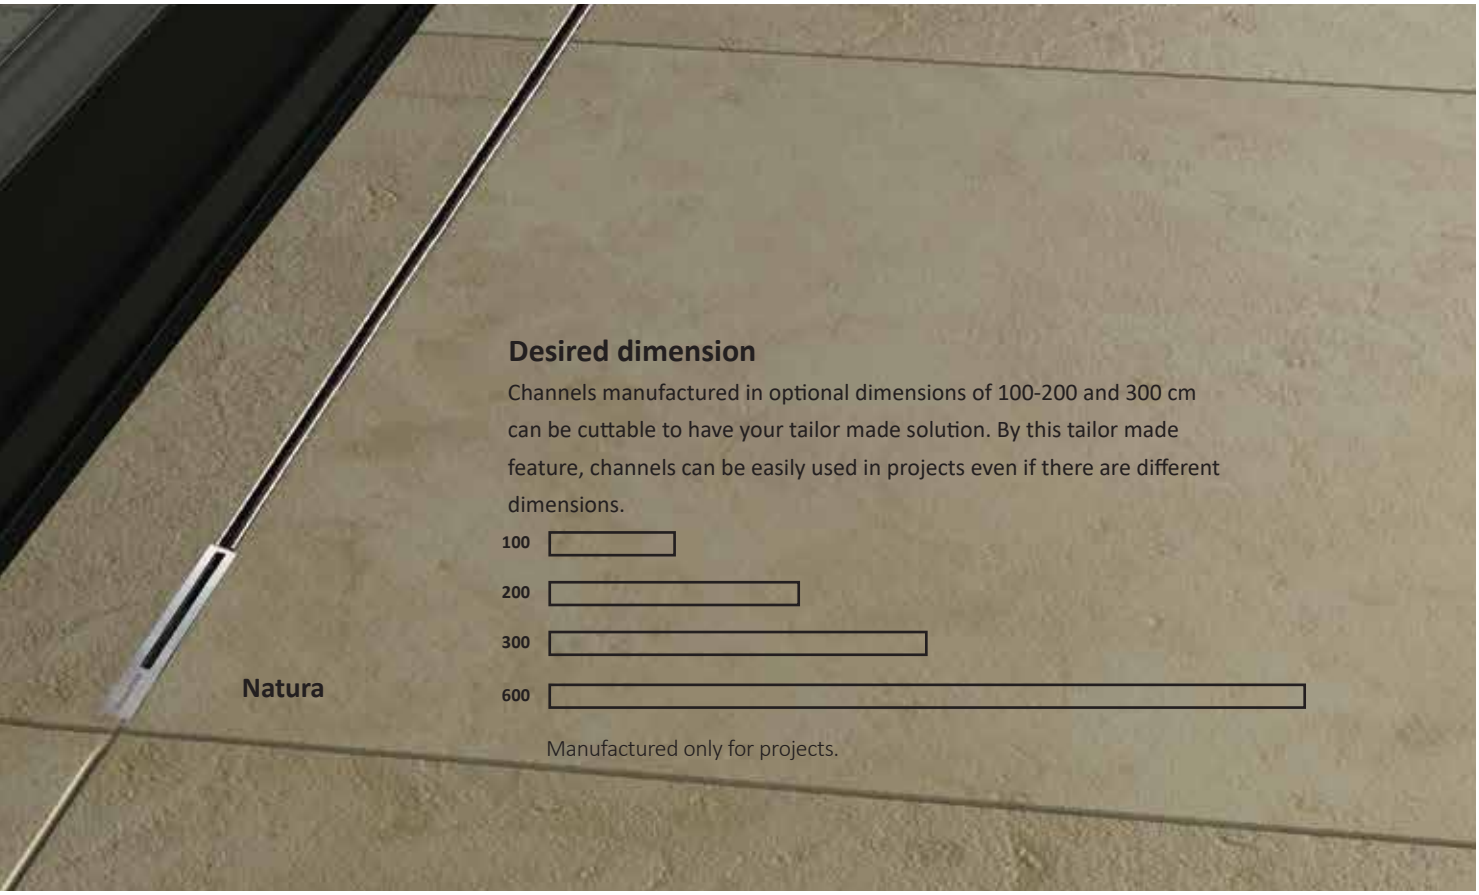

Desired dimension

Channels manufactured in optional dimensions of 100-200 and 300 cm can be cuttable to have your tailor made solution. By this tailor made feature, channels can be easily used in projects even if there are different dimensions.

100
200
300
600

Manufactured only for projects.

Punto Floor Drains / page : 50-65

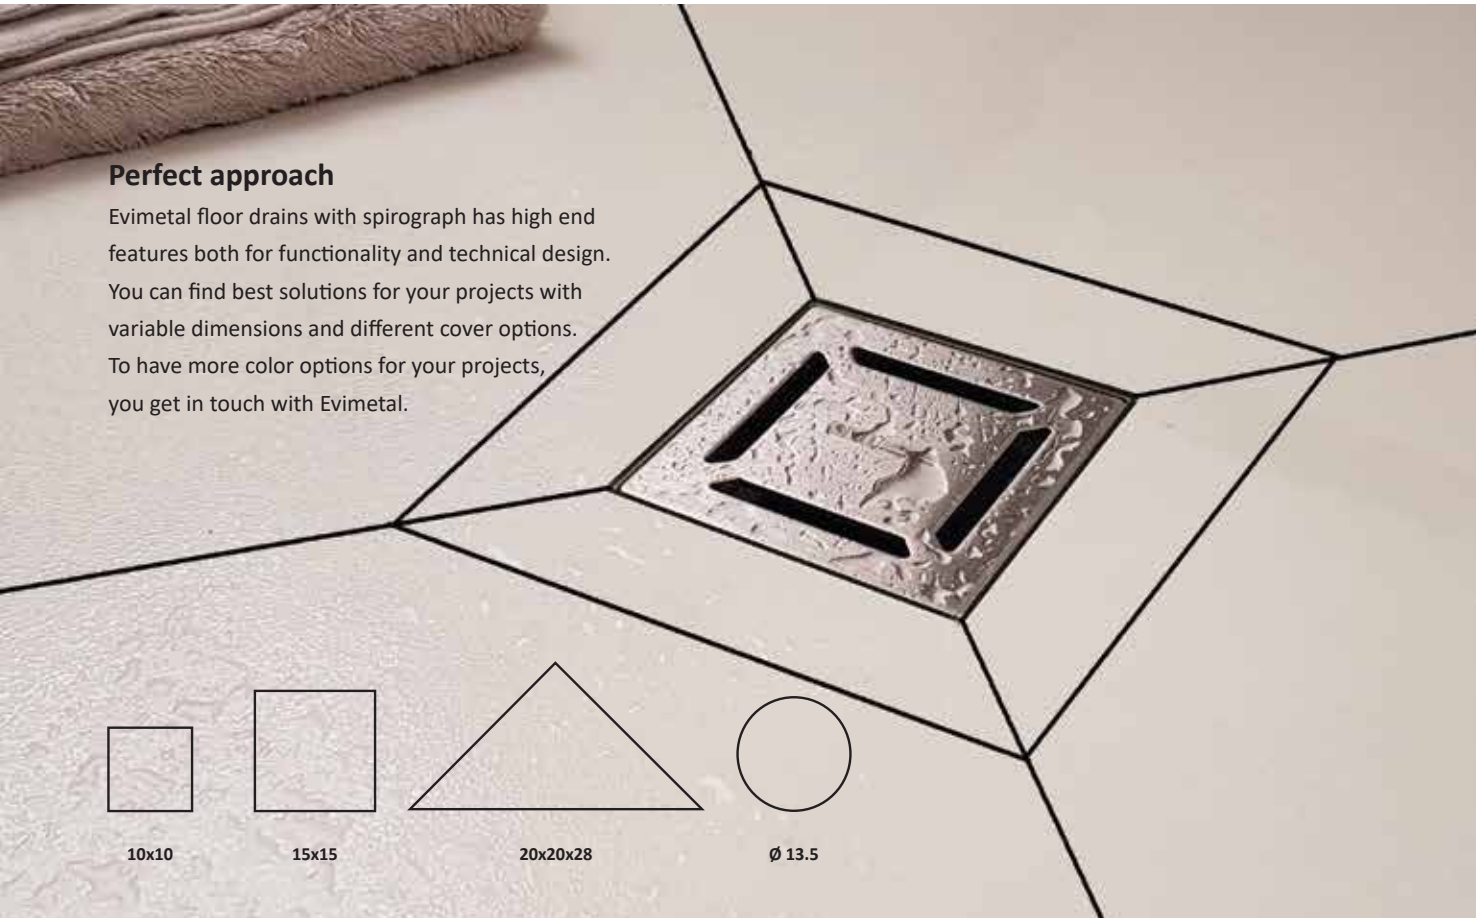

Perfect approach

Evimetal floor drains with spirograph has high end features both for functionality and technical design. You can find best solutions for your projects with variable dimensions and different cover options. To have more color options for your projects, you get in touch with Evimetal.

Corner & Finish Profiles / page : 66 - 88

glaze PRF.710 Page / 70

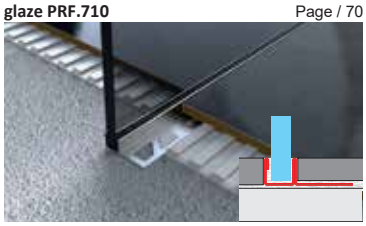

glaze PRF.711 Page / 70

ler PRF.100 Page / 71

fez PRF.500 Page / 72

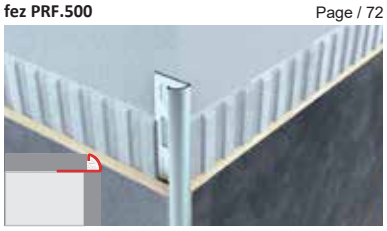

vera PRF.400 Page / 73

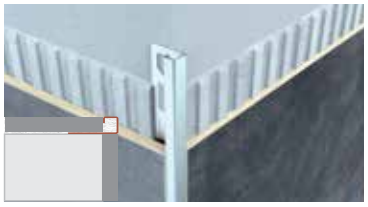

kot t PRF.790 Page / 74

kot t PRF.791 Page / 74

ler PRF.110 Page / 75

ram PRF.800-820 Page / 76

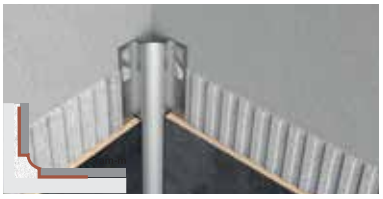

ram PRF.840-860 Page / 77

form PRF.200-240 Page / 80

rene PRF.300 Page / 81

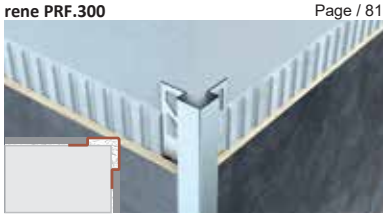

mare PRF.600 Page / 82

alfa PRF.290 Page / 83

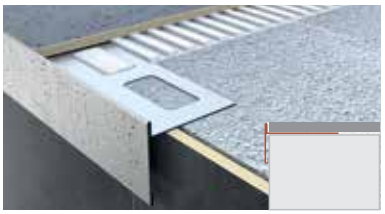

eta PRF.450 Page / 84

genex PRF.140 Page / 84

base PRF.900 - 940 - 950 Page / 85

kot PRF.904-760 Page / 86

kot PRF.700-740 - 750 Page / 87

kot PRF.740 Page / 87

arm PRF.130 Page / 88

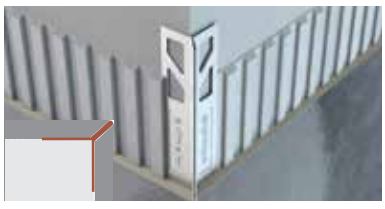

cover holder / page 82

Decorative Profiles / page : 89-93

corner shelf Page / 67

decoline B 902 Page / 78

decoline B 906 Page / 79

decoline B 908 Page / 90

decoline B 907 Page / 91

decoline B 645 Page / 92

decoline B 740 Page / 93



cover holder Page / 82

Stainless steel towelrails / page : 94 - 102

trea Page / 95

adora Page / 96

kreon Page / 97

troisi Page / 98

dynamic Page / 99

arden Page / 100

aria Page / 101

valves Page / 102

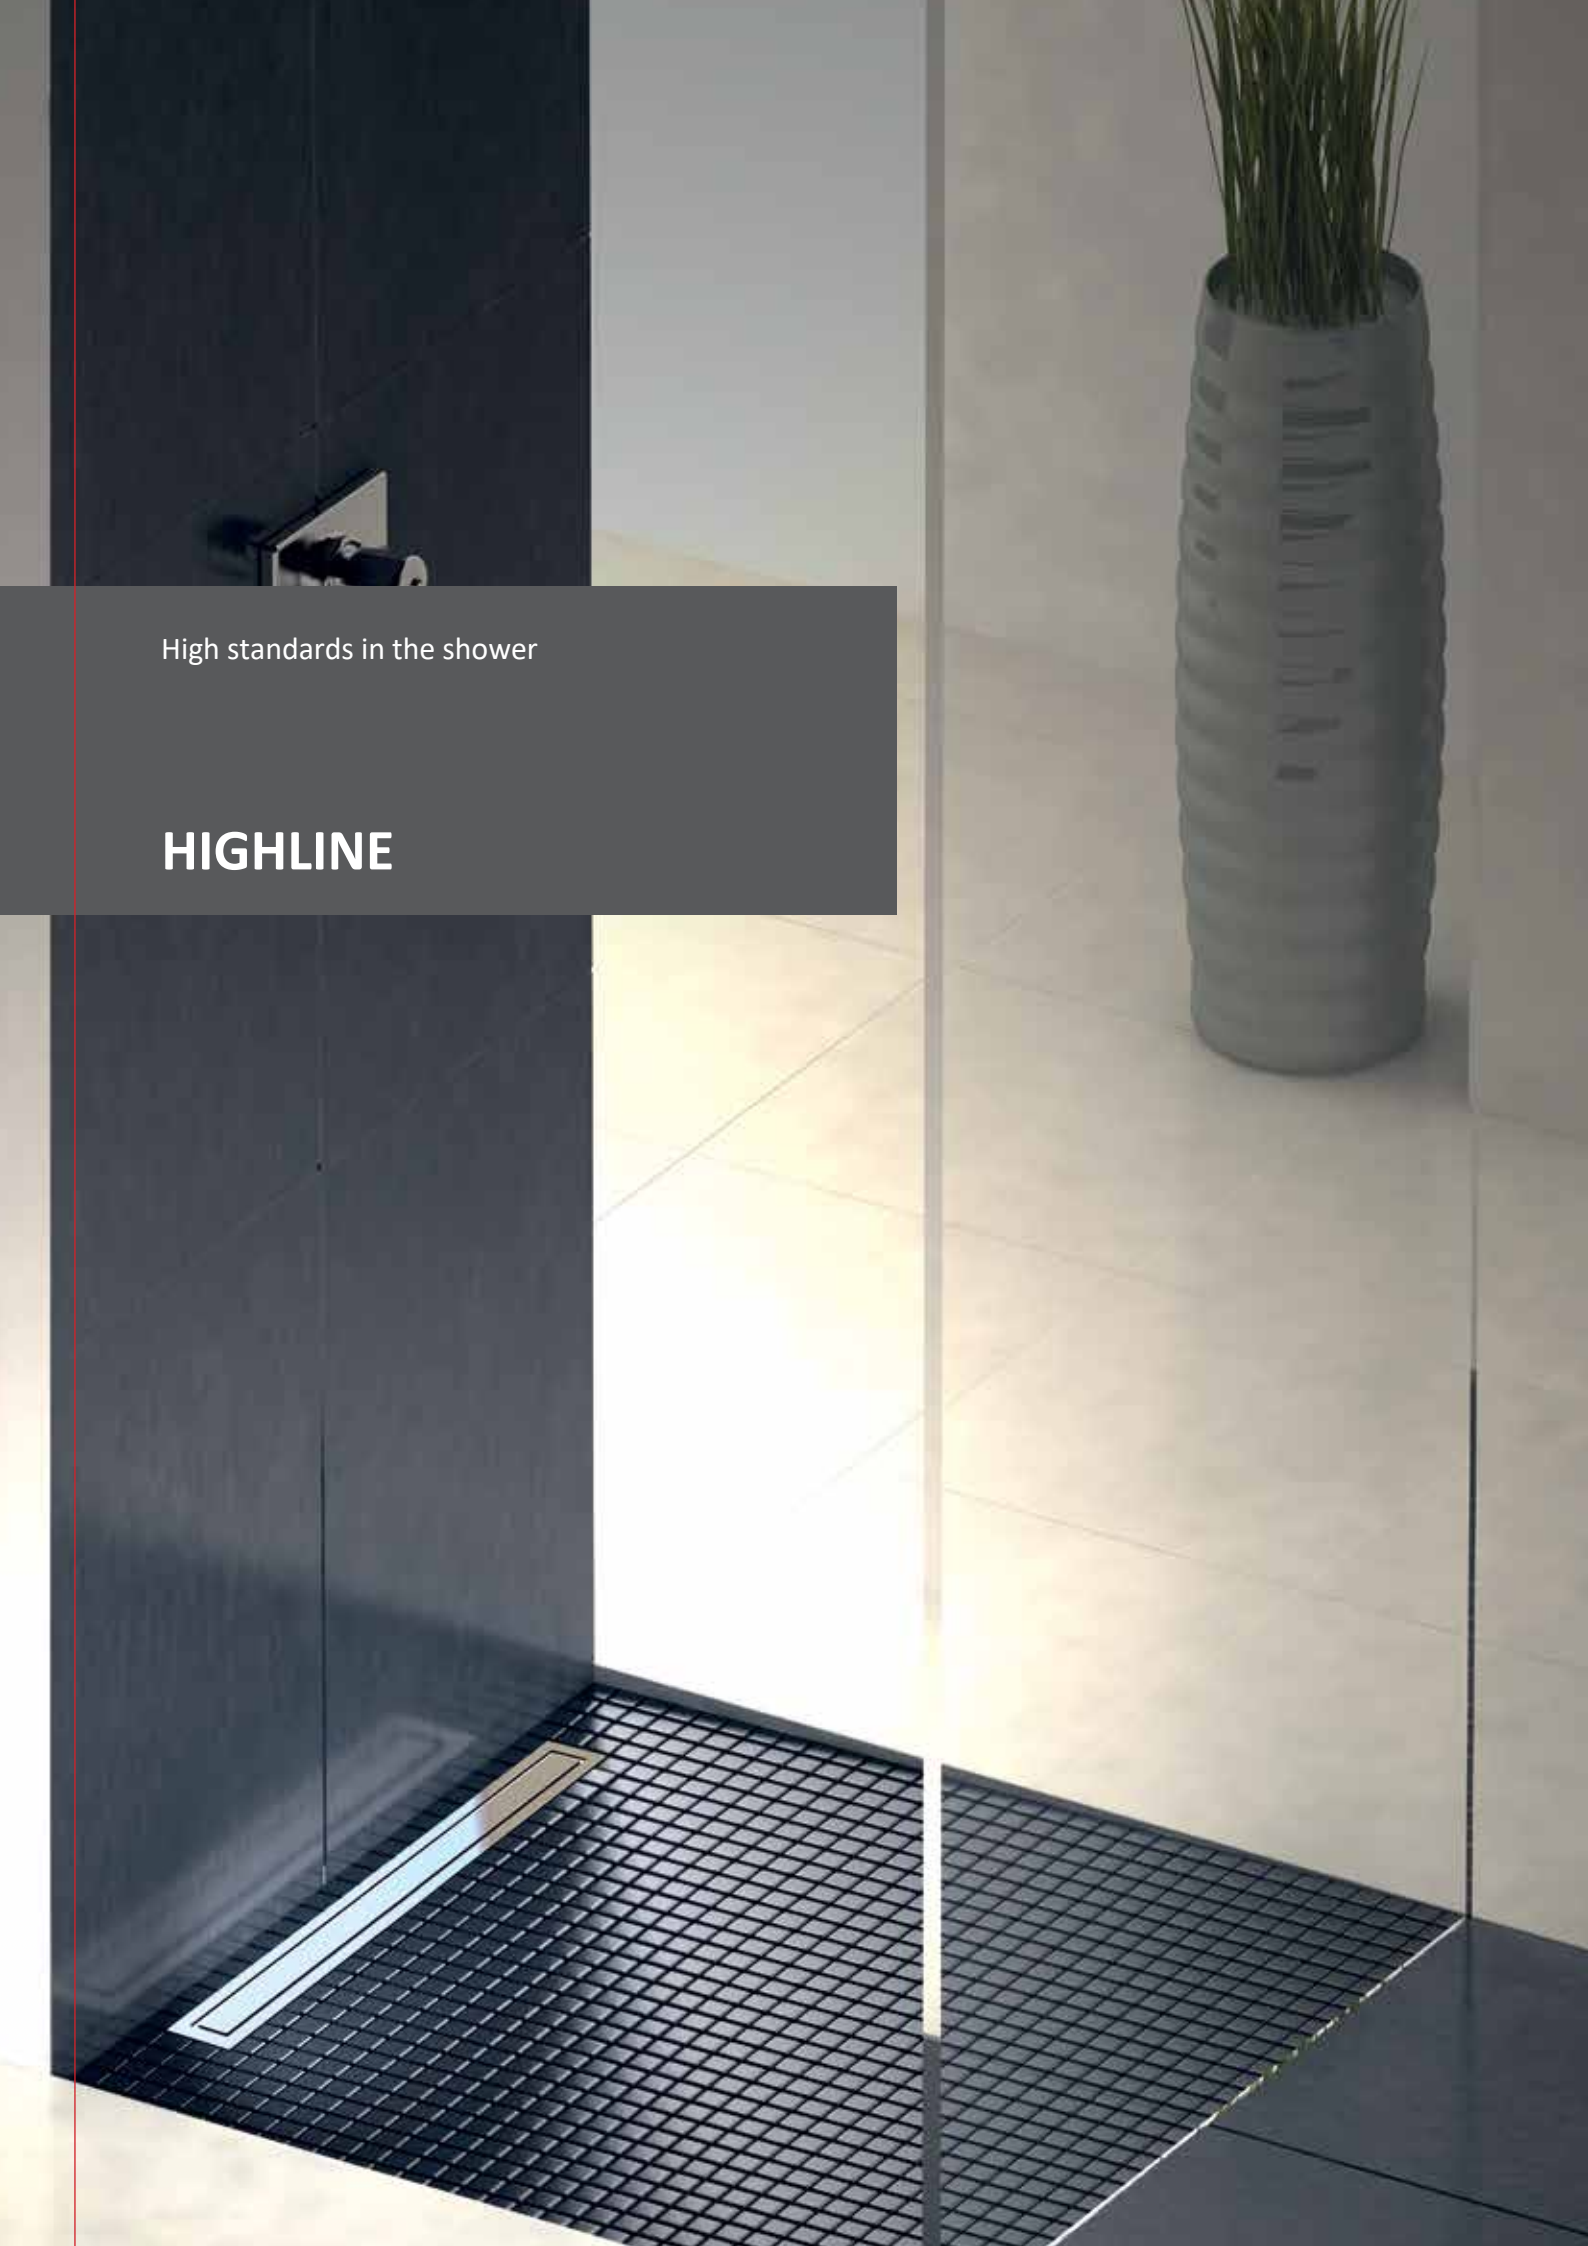

High standards in the shower

HIGHLINE

Evimetal shower channels

Zero-surface shower solutions

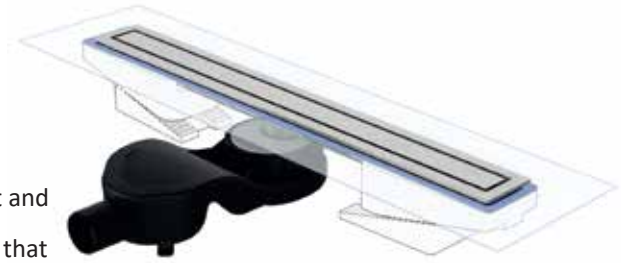

Evimetal shower solutions for floor-drain systems are not only elegant and pure in design but also functional in use. Solid bodies with steel tanks that are compatible with 9 different cover plates and 7 different colour alternatives offer you more than 100 options for shower channels.

Designed for maximum hygiene

Zero-surface shower channels include spiral hair&dirt traps that are easily removed and cleaned for reuse. Highly satisfying the expectations of hygiene-oriented users.

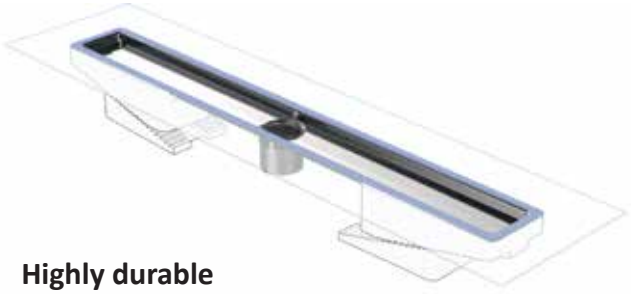

Highly durable

Steel-tank constructions having solid bodies serve for long-lasting usage.

Waterless membran odor trap

Y.8155
(Optional)

Desired height

Thanks to the 'gradual height adjustment set' patented by Evimetal; no more alignment problems of height and elevation differences occur during installation.

Details in design

Optionally offered 'Linearis inclination system' prevents pondings in the shower areas. Fouling of ceramic joints caused by elevation differences is avoided resulting in perfect finish and clean look.

Different expectations, professional solutions

PRODILINE

Cover options on how they look:

MASSIVE
Framed Cover

Cover with 3 mm thickness offer solid, wide, unique and perfect appearance.

BRILLA
Framed Cover

Cover with 3 mm thickness offer solid, wide, unique and perfect appearance.



PDK NOVA / NATURA
Framed Cover



NOVA cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside and continue to maintain integrity as well as elegancy in your bathroom.

NOMINA
Hidden Cover (unframed)

NATURA cover can be used with each of your desired covering materials. This provides harmony in the showering areas. Drain bodies are nearly invisible as if never existed.



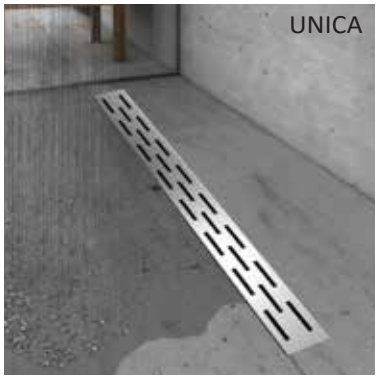

PERFORATED COVER

Perforated covers are manufactured based on Special Projects.
If requested, please contact us and submit your Project's technical information.



Perfect match for new constructions and renovation projects

Evimetal shower drains with highly qualified features satisfy variety of needs. With its different dimension, colour and trap options; Evimetal offers more than what's expected for new constructions, renovation projects and even with limited spaces. You may also choose among many cover plate alternatives compatible with your own tiles and create harmony in your bathrooms.

Product Selection Guide

Cover Options

Massive

Brilla

PDK Nova/Natura (Reversible Cover)

CDK Nova

Unica

Greka

Aqua

Nomina

Quadra

Drain Body

For high discharge can be produced as compatible with double trap drains based on Project.

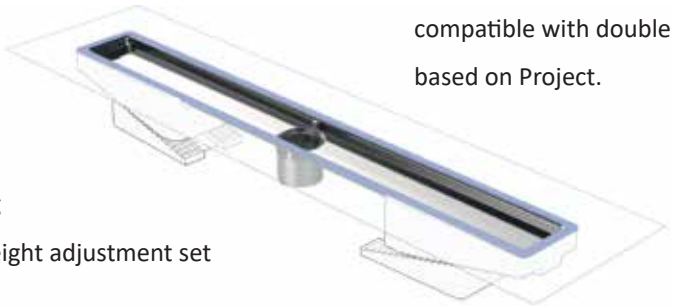

Steel housing

Styrofoam height adjustment set

Odourless

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

Side outlet
H:80 mm

Odourless S type
trap 60 l/min

Vertical outlet
H:50 mm (Core drill 120 mm)

Odourless S type
trap 84 l/min

No Trap

Vertical outlet
H:50 mm
(Core drill 70 mm)

66 l/min

Side outlet
H:75 mm

66 l/min

The values given are siphon capacity and vary according to the cover model.

Highline

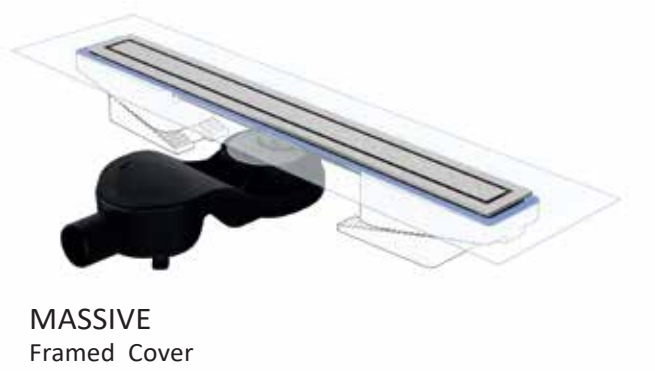

MASSIVE
Framed Cover

Cover with 3 mm thickness offer
solid, wide, unique and perfect appearance.

Designed for maximum hygiene

Zero surface shower channels include spiral hair and dirt traps that can be easily removed and cleaned for reuse. This highly satisfies the expectations of hygiene oriented users.

Siphon Options

Side outlet H:80 mm		SS.8081	Odourless S type trap 60 l/min
Side outlet H:60 mm		SS.8082	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		SS.8086	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		SS.8130	No S type 66 l/min
Side outlet H:75 mm		SS.8135	No S type 66 l/min

The values given are siphon capacity and vary according to the cover model.

Waterless membran odor trap

Y.8155
(Optional)

Details in design

Optionally offered 'Linearis inclination system' prevents ponding in shower areas. Fouling of ceramic joints caused by elevation differences is avoided, resulting in a perfect finish and clean look.

Easy cleaning apparatus

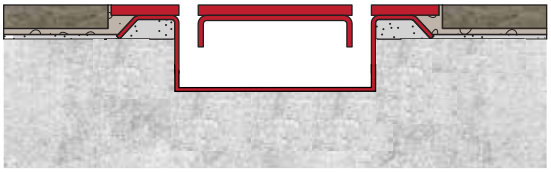

Highly durable

Steel-tank constructions having
solid bodies serve for long-lasting usage.

			30	40	50	60	70	80	90
Inox Drain Body (external mebrane)		Ø 50 Pipe connect	HS.8025.17.30	HS.8025.17.40	HS.8025.17.50	HS.8025.17.60	HS.8025.17.70	HS.8025.17.80	HS.8025.17.90
		Ø 40 Pipe connect	HS.8025.18.30	HS.8025.18.40	HS.8025.18.50	HS.8025.18.60	HS.8025.18.70	HS.8025.18.80	HS.8025.18.90
		Siphon connect	HS.8025.20.30	HS.8025.20.40	HS.8025.20.50	HS.8025.20.60	HS.8025.20.70	HS.8025.20.80	HS.8025.20.90
Inox Drain Body (fabric mebrane)		Ø 50 Pipe connect	HS.8026.17.30	HS.8026.17.40	HS.8026.17.50	HS.8026.17.60	HS.8026.17.70	HS.8026.17.80	HS.8026.17.90
		Ø 40 Pipe connect	HS.8026.18.30	HS.8026.18.40	HS.8026.18.50	HS.8026.18.60	HS.8026.18.70	HS.8026.18.80	HS.8026.18.90
		Siphon connect	HS.8026.20.30	HS.8026.20.40	HS.8026.20.50	HS.8026.20.60	HS.8026.20.70	HS.8026.20.80	HS.8026.20.90

Massive		3 mm Stainless steel	HDK.2000.30.1.S.I	HDK.2000.40.1.S.I	HDK.2000.50.1.S.I	HDK.2000.60.1.S.I	HDK.2000.70.1.S.I	HDK.2000.80.1.S.I	HDK.2000.90.1.S.I
Brilla		3 mm Stainless steel	HDK.2100.30.1.S.I	HDK.2100.40.1.S.I	HDK.2100.50.1.S.I	HDK.2100.60.1.S.I	HDK.2100.70.1.S.I	HDK.2100.80.1.S.I	HDK.2100.90.1.S.I

* (With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

ProdiLine

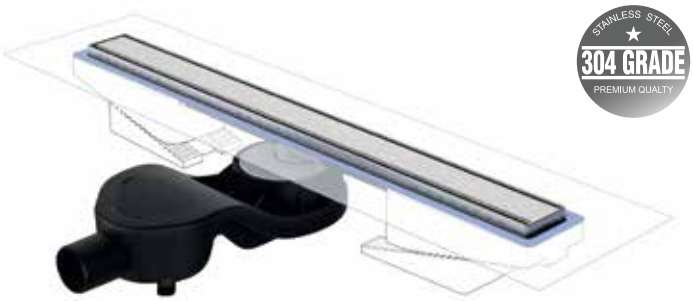

Styrofoam height adjustment set

Designed for maximum hygiene

Zero surface shower channels include spiral hair and dirt traps that can easily be removed and cleaned for reuse. This highly satisfies the expectations of hygiene oriented users.

Waterless membran odor trap

Y.8155 (Optional)

Siphon Options

Side outlet H:80 mm		SS.8081	Odourless S type trap 60 l/min
Side outlet H:60 mm		SS.8082	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		SS.8086	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		SS.8130	No S type 66 l/min
Side outlet H:75 mm		SS.8135	No S type 66 l/min

The values given are siphon capacity and vary according to the cover model.

Perfect match for new constructions and renovation projects.

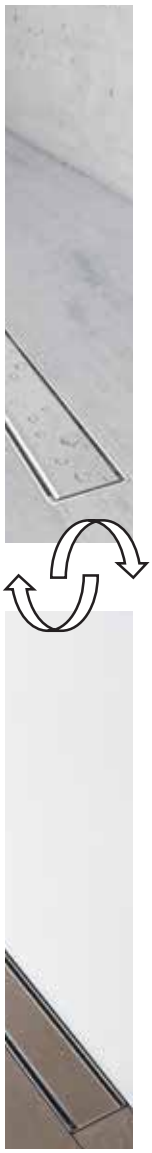

NOVA / NATURA

Framed Cover

NOVA



Reversible

Nova cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside while continuing to maintain integrity and elegancy in your bathroom.

Easy cleaning apparatus

NATURA



			30	40	50	60	70	80	90
Inox Drain Body (external mebrane)		Ø 50 Pipe connect	HS.8025.17.30	HS.8025.17.40	HS.8025.17.50	HS.8025.17.60	HS.8025.17.70	HS.8025.17.80	HS.8025.17.90
		Ø 40 Pipe connect	HS.8025.18.30	HS.8025.18.40	HS.8025.18.50	HS.8025.18.60	HS.8025.18.70	HS.8025.18.80	HS.8025.18.90
		Siphon connect	HS.8025.20.30	HS.8025.20.40	HS.8025.20.50	HS.8025.20.60	HS.8025.20.70	HS.8025.20.80	HS.8025.20.90
Inox Drain Body (fabric mebrane)		Ø 50 Pipe connect	HS.8026.17.30	HS.8026.17.40	HS.8026.17.50	HS.8026.17.60	HS.8026.17.70	HS.8026.17.80	HS.8026.17.90
		Ø 40 Pipe connect	HS.8026.18.30	HS.8026.18.40	HS.8026.18.50	HS.8026.18.60	HS.8026.18.70	HS.8026.18.80	HS.8026.18.90
		Siphon connect	HS.8026.20.30	HS.8026.20.40	HS.8026.20.50	HS.8026.20.60	HS.8026.20.70	HS.8026.20.80	HS.8026.20.90

Nova(PDK)		Rewersible solid or tile - in	PDK.1050.30.1.S.I	PDK.1050.40.1.S.I	PDK.1050.50.1.S.I	PDK.1050.60.1.S.I	PDK.1050.70.1.S.I	PDK.1050.80.1.S.I	PDK.1050.90.1.S.I
Unica		Perforated cover	PDK.1020.30.1.S.I	PDK.1020.40.1.S.I	PDK.1020.50.1.S.I	PDK.1020.60.1.S.I	PDK.1020.70.1.S.I	PDK.1020.80.1.S.I	PDK.1020.90.1.S.I
Quadra		Perforated cover	PDK.1081.30.1.S.I	PDK.1081.40.1.S.I	PDK.1081.50.1.S.I	PDK.1081.60.1.S.I	PDK.1081.70.1.S.I	PDK.1081.80.1.S.I	PDK.1081.90.1.S.I
Nomina		(CDK) Hidden Cover	CDK.1053.30.1.S.I	CDK .1053.40.1.S.I	CDK .1053.50.1.S.I	CDK.1053.60.1.S.I	CDK.1053.70.1.S.I	CDK.1053.80.1.S.I	CDK.1053.90.1.S.I

* (With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

Technical Information

Application Details

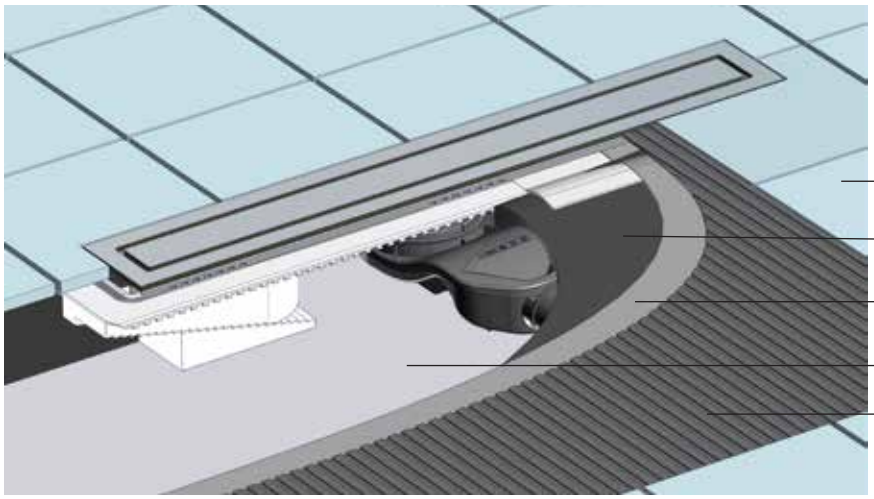

Assembly scheme

Steel housing

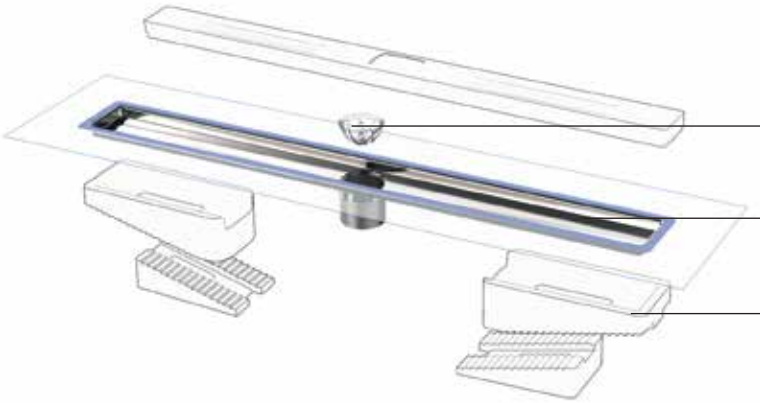

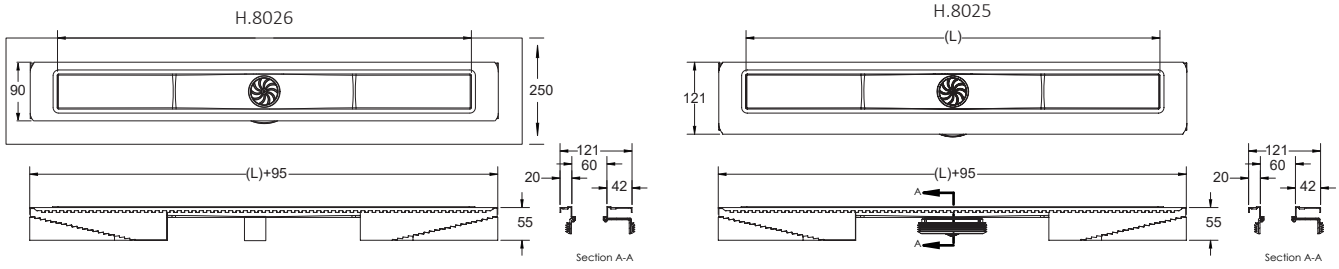

L : 300mm I 400mm I 500mm I 600mm I 700mm I 800mm I 900mm

Color alternatives fit for your projects

Evimetal can be produced in 9 different coating alternatives. Production based on your special needs is also possible. You may refer to sales consultant in case of any questions about project solutions and technical questions. On gold, bronze and black surfaces titanium PVD coating is applied.

	Satine	1.S.I
	Super mirror	2.S.M
	Mirror gold	3.M.G
	Satine gold	4.S.G
	Shine	5.S.P
	Mirror Bronze	6.M.B
	Satine Bronze	7.S.B
	Mirror Anthracite	8.M.A
	Satine Anthracite	9.S.A
	Dark Black	10.D.B

There may be differ with between the colors specified in the catalog and the products color because of color covering technique.

CDK COVER PLATE

Cover K.1050

Height adjustment set Y.8076

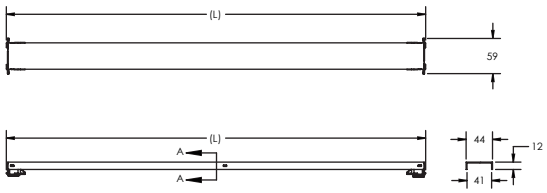

L : 300mm I 400mm I 500mm I 600mm I 700mm I 800mm I 900mm

PDK COVER

Cover K.1050

Frame C.P

Height adjustment set Y.8076

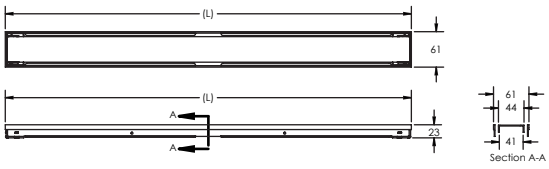

L : 300mm I 400mm I 500mm I 600mm I 700mm I 800mm I 900mm

HDK COVER



Cover K.2000

Cover C.H.2000

Height adjustment set Y.8076

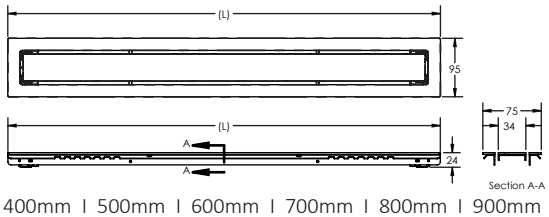

L : 300mm I 400mm I 500mm I 600mm I 700mm I 800mm I 900mm

Siphon Water Depth Technical Details

Odourless

Side outlet
H:80 mm

Odourless S type
**trap 60 l/min

SS. 8081



Side outlet
H:60 mm

Odourless S type
trap 42 l/min

SS. 8082



Vertical outlet
* H:50 mm

Odourless S type
**trap 84 l/min

SS. 8086



** Tested in accordance with EN-1253 Standards at TUV Germany Laboratories.

No Water Trap

Vertical outlet
*** H: 50 mm

No S type
66 l/min

SS. 8130

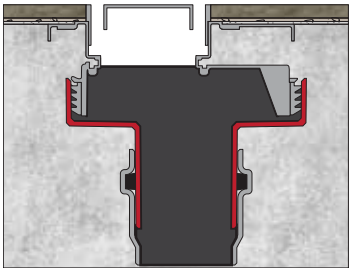

Side outlet
H:75 mm

No S type
66 l/min

SS. 8135

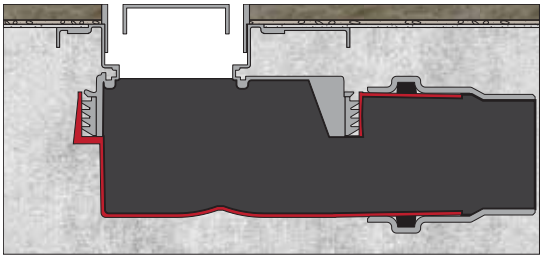

* (With 120 mm Carot Drill) *** (With 70 mm Carot Drill)

Montage

Vertical outlet and Side outlet application steps

Siphon must be connected to the body.

Drill the concrete with the help of drilling core for the pipe connection.

Assemble siphon to metal insulation subcase.

Adjust height adjusting set with scale according to the ground level Each step is 2 mm

Makes hole from the inside of channel to fix height adjusting sets

Please tick height adjustment set before hole.


Fix the adjusting set with special styropor dowel. (optional)


Place the insulation-finish metal case to the adjusting set.

Connect the shower channel to the installation ard put the protective styropor in case of blockage.


Bevel the slant of leveling concrete min 1% towards shover channel.


Apply priming coat to leveling concrete. Adhere the isolation tape to the metal-concrete.*


Insulate the whole surface min 2 layer with sliding isolation.

Spread the ceramic adhesive to the surface.


Do not remove the protective styropor until the ceramic application is completed.


Remove the protective styropor and place the metal sash.


Remove the protective styropor and adjust the level gradual parts from each point.

Fix the metal sash with silicon or joint.


After the adjustment process place the cover.


Clean the siphon with the help of cover key.


Place the hair holder to the cleaned tank without leaving a blank.

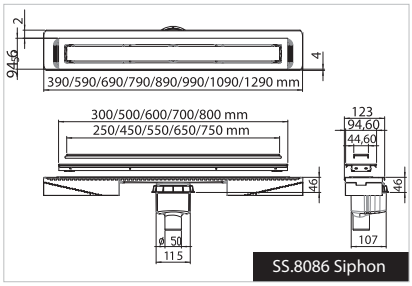

SS.8086 Siphon

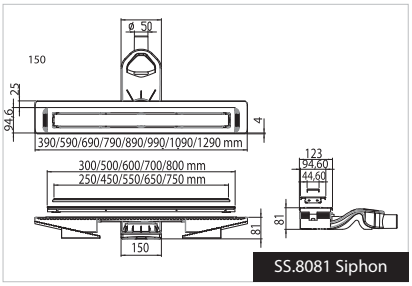

SS.8081 Siphon

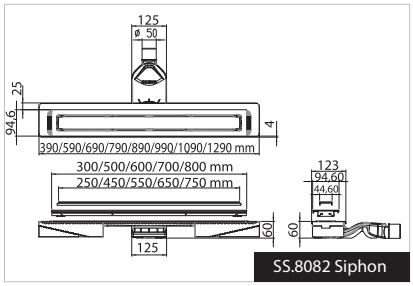

SS.8082 Siphon

Warning

- Do not rip off the protective cover film until the whole application finished
- Carry out the processes through EVIMETAL user guide
- Adhesives should applied to the both sides (both te product and wall or floor)
- Use cutting and drilling tools which enable to cut steel without damaging product.

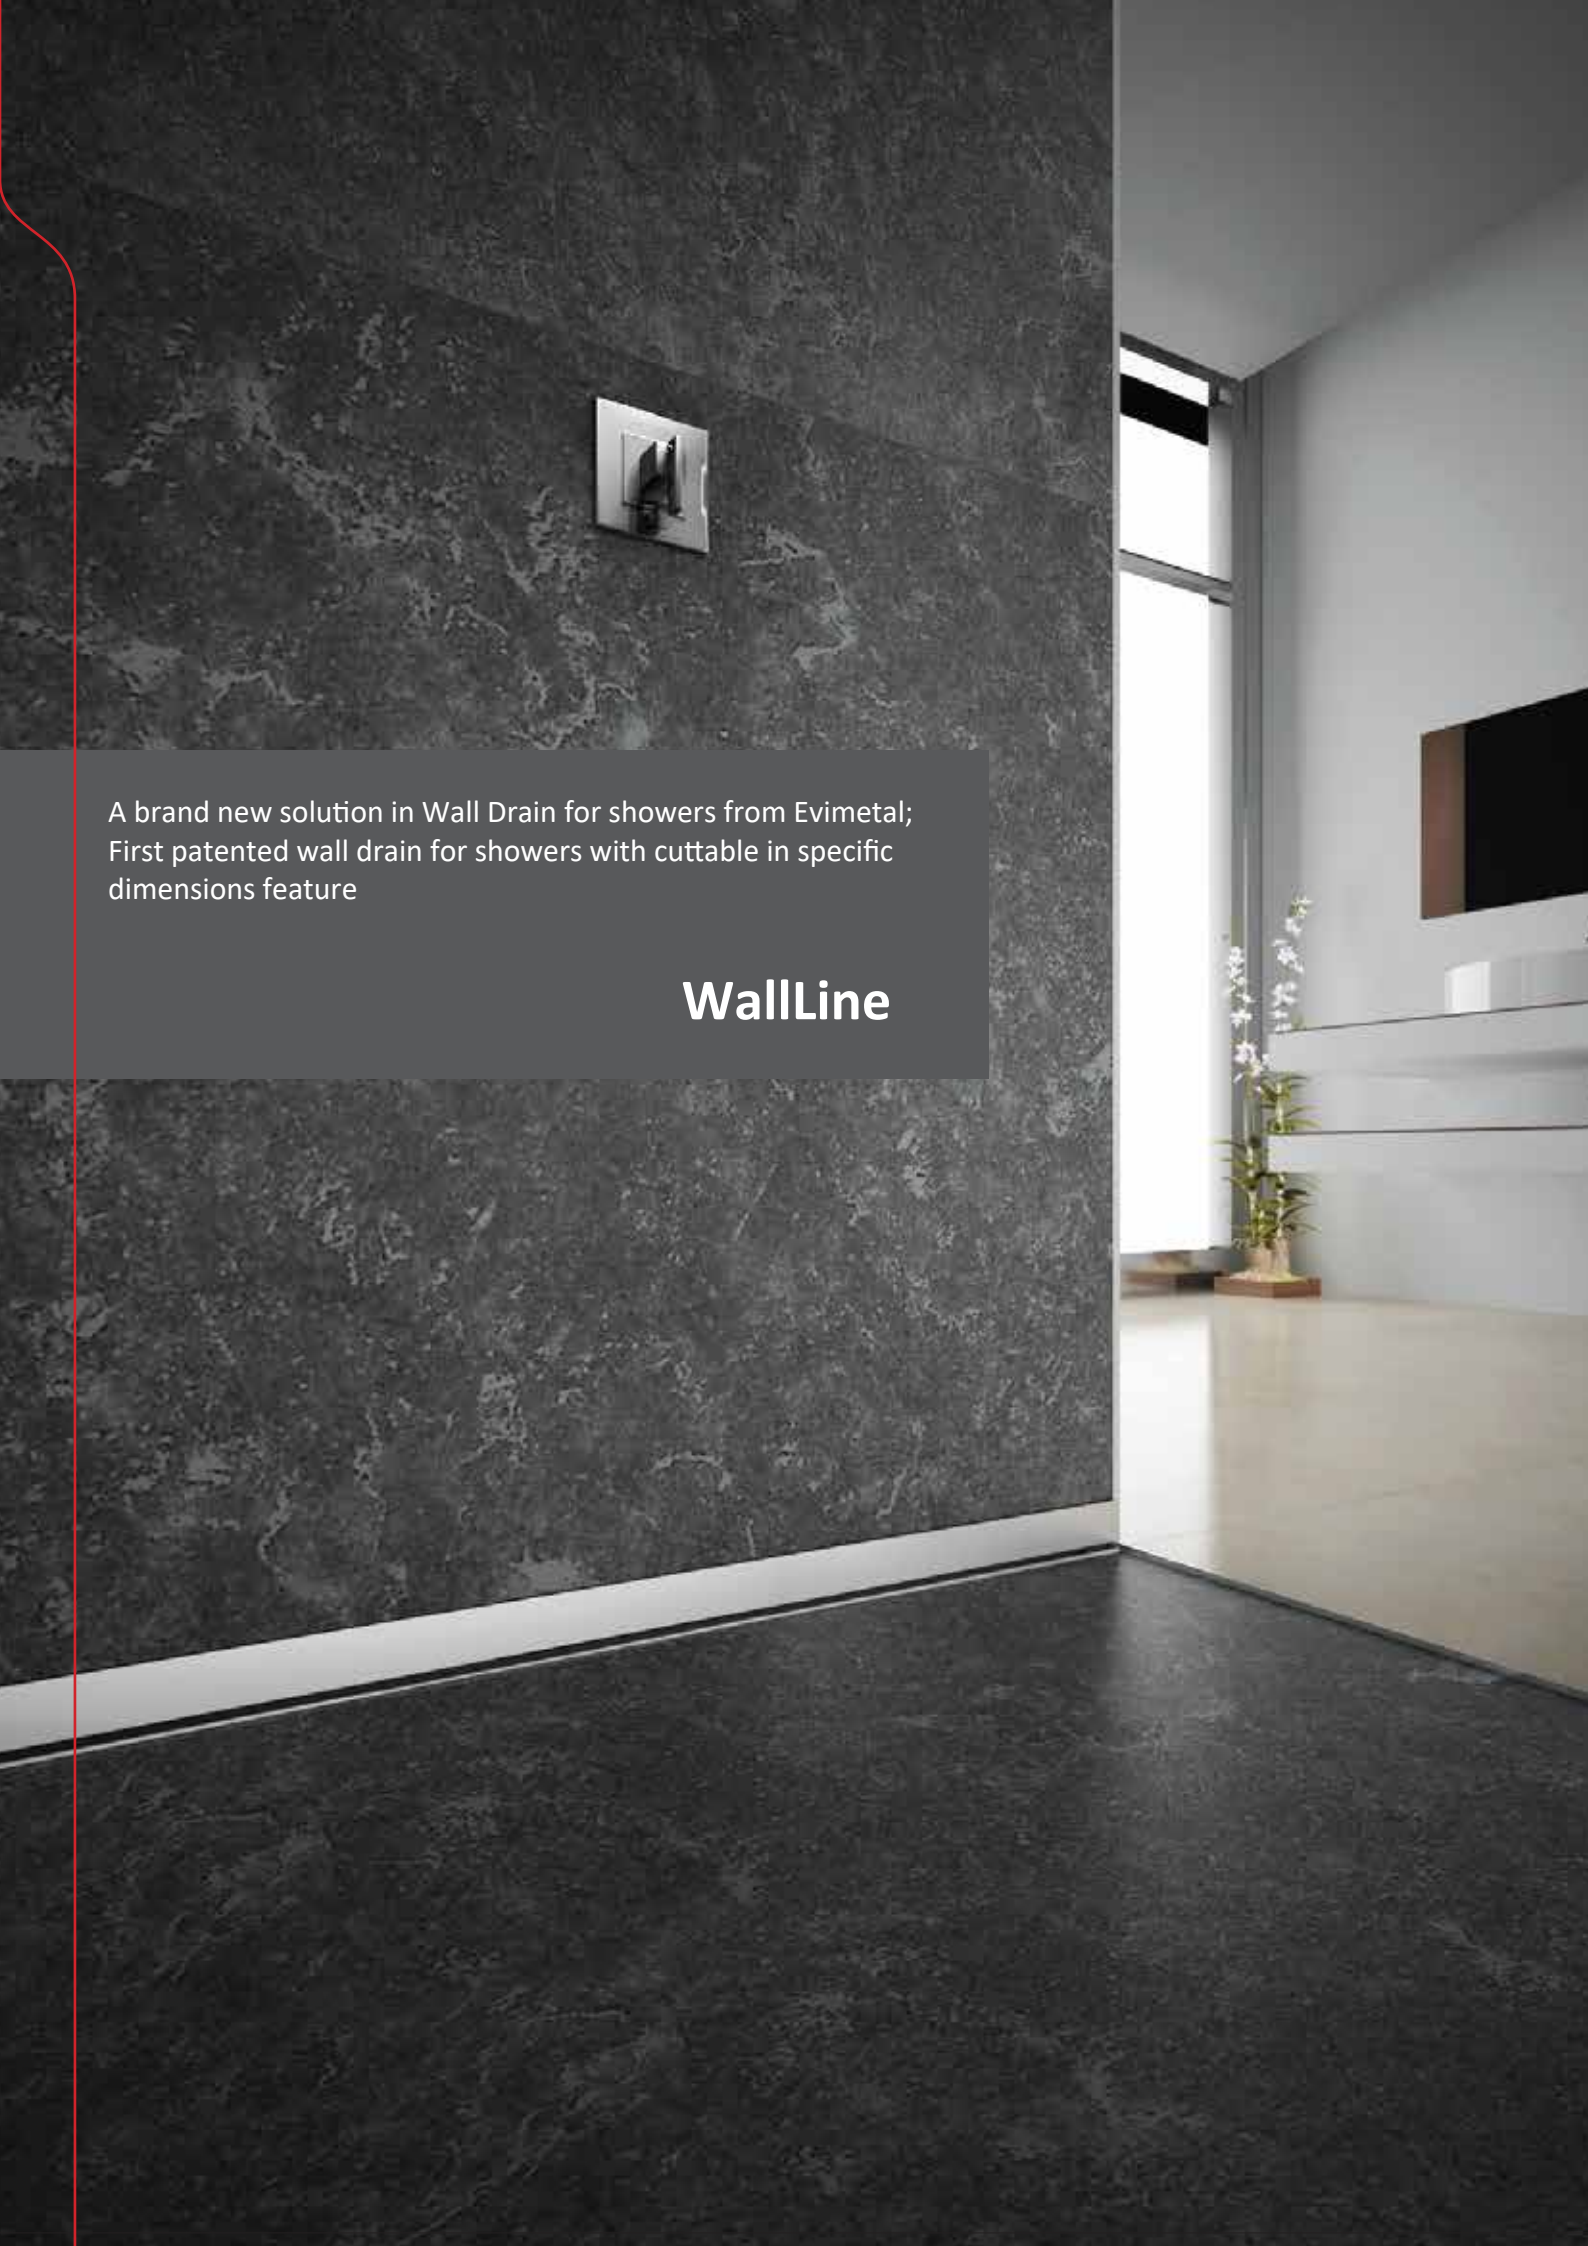

A brand new solution in Wall Drain for showers from Evimetal;
First patented wall drain for showers with cuttable in specific dimensions feature

WallLine

Evimetal Wall Drain for Showers

Solutions for Showers

WallLine is the first patented wall drain for shower with cuttable to specific dimensions feature, won Good Design Award in Construction Materials category 2017 Design Turkey Industrial Design Awards. WallLine also won the IF Design Award, one of Germany's most prestigious design awards, in the international arena. Style in bathroom, wall to wall seamless look and functionality comes with WallLine wall drain for showers.

More showering space

By creating and alternative for floor installed drains, the benefit you will have is more space for showering as drain is installed on the wall. Having a shower was not that much joy before.

Built-in drain body

Built-in body and adjustment flange brings durability and easy installation. It is compatible with covering materials up to 30 mm thickness.

Easy Cleaning

By the removable cover, leftover dirt particles in the body can easily be cleaned. Structure itself helps to ease installation to give the incline needed.

Seamless perfect look

Patented adjustment piece makes floor and wall covering material join almost seamlessly. The end piece attached to cover ends helps to have a perfect finish and a clean installation.

End piece

Wall & Floor
Adjustment piece

DESIGN AWARD 2018
Germany

DESIGN TURKEY
2017
Good Design Award

Easy-to-cut cover and frame

Cover and frame are able to be cut into desired dimensions between 60 and 100 cm giving flexibility to have tailor-made dimensions for your projects. WallLine cover is manufactured in satin color but can be made in other colors depending on your needs. Please see page 17 for other color options.

60 cm

100 cm

WallLine

More shower space

We have created an alternative to floor installed drains. You will benefit by having more space for showering when the drain is installed on the wall. Showers have never been more enjoyable until now.

Built-in drain body

Built-in body and adjustment flange brings durability and easy installation. It is compatible with covering materials up to 30 mm thickness.

End piece

Wall & Floor Adjustment piece

Seamless, perfect look

Patented adjustment piece makes floor and wall covering material join almost seamlessly. The end piece attached to cover ends helps to create a clean installation and perfect finish.

Siphon Options

Side outlet H:80 mm		SS.8081	Odourless S type trap 60 l/min
Side outlet H:60 mm		SS.8082	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		SS.8086	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		SS.8130	No S type 66 l/min
Side outlet H:75 mm		SS.8135	No S type 66 l/min

The values given are siphon capacity and vary according to the cover model.

Drain Base		HS.8168

Easy-to-cut structure, high precision

Channels and drain bodies manufactured in 60 and 100 cm can be cut into your desired dimensions. With this tailor made feature, these channels can be easily used in products with different dimensions special size for your project.

Easy cleaning

Leftover dirt particles in the body can be easily cleaned with the removable cover. The structure itself eases installation to give the incline needed.

Technical drawing

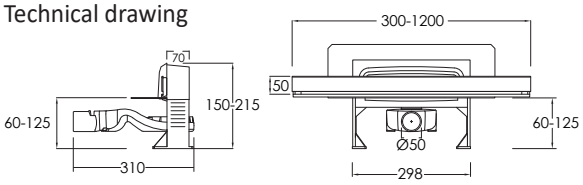

	Cover	60		100	
Imperia		Satine	WDG.2050.60.1.S.I	Satine	WDG.2050.100.1.S.I

* (With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

Imperia 60 cm

Imperia 100 cm

Built-in body for plaster boards

Odourless

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

Side outlet
H:80 mm

Odourless S type
trap 60 l/min

Vertical outlet
H:50 mm (Core drill 120 mm)

Odourless S type
trap 84 l/min

No Trap

Vertical outlet
H:50 mm
(Core drill 70 mm)

66 l/min

Side outlet
H:75 mm

66 l/min

The values given are siphon capacity and vary according to the cover model.

Siphon Water Depth Technical Details

Odourless

Side outlet
H:80 mm

Odourless S type
** trap 60 l/min

SS. 8081

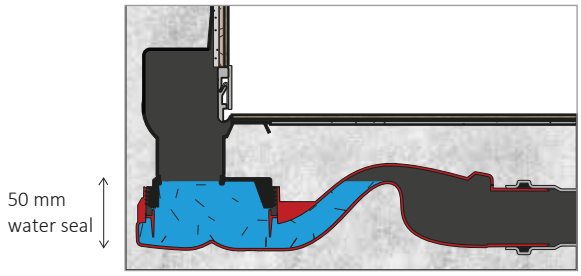

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

SS. 8082

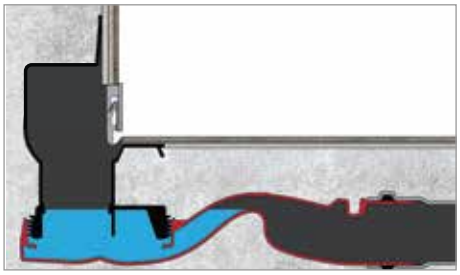

Vertical outlet
* H:50 mm

Odourless S type
** trap 84 l/min

SS. 8086



** Tested in accordance with EN-1253 Standards at TUV Germany Laboratories.

No Water Trap

Vertical outlet
*** H: 50 mm

No S type
66 l/min

SS. 8130



Side outlet
H:75 mm

No S type
66 l/min

SS. 8135



* (With 120 mm Carot Drill) *** (With 70 mm Carot Drill)

Technical Details

Application Details

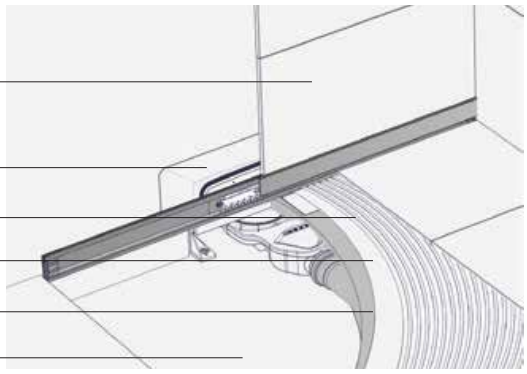

Built-in body

HS.8168

NO	PART NAME	QTY.
1	Y.8168 (Subcase)	1
2	Y.8168 A (Cover Flange)	1
3	Y.8168B (Isolation Flange)	1
4	Y.8167 (Wall Chassis)	1
5	Y.8169 (Height Adjustment - Left)	1
6	Y.8169 (Height Adjustment - Right)	1
7	Y.8170 (Protection Cover)	1
8	WDG.2050 (Cover Set)	1
9	Y.8171 (Siphon Connector)	1

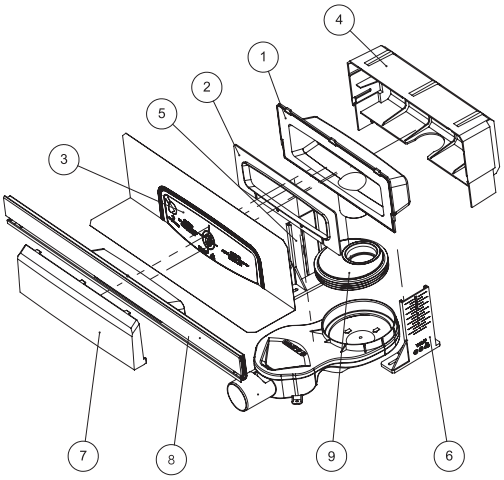

WDG Cover

Can be cuttable from 300 mm to 1000 mm in the desired dimension.

L : 600mm I 1000mm

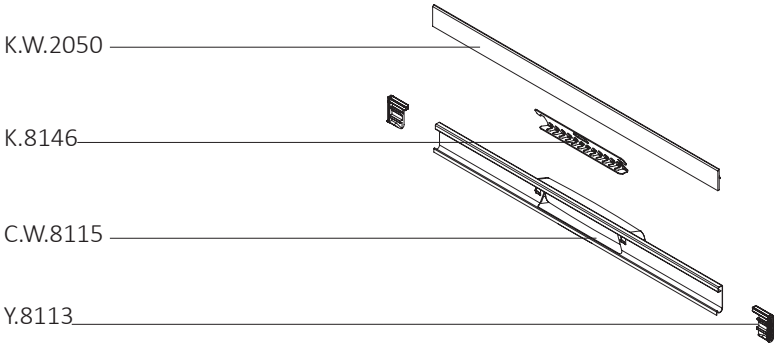

Montage

1



2



3

4



5



6



7

8



9



10



11



12



Please check water flow.

13



14

15



16

17



18



19

20



21



22



23



24



Cuttable shower channel, for modern shower areas

TrendLine

Evimetal cuttable shower channel

Solutions for Shower

Evimetal designs easy installed, hygienic and also economic products for shower areas by patented solutions. Like all the other Evimetal shower channels, TrendLine can also be located both in front of wall or center. Cuttable feature makes installations easier by generating tailor made dimensions.

Inclined 3 mm solid shower channel

TrendLine shower channel is self inclined so water can flow to trap. By TrendLine there can be no unreachable areas for water.

Designed for maximum hygiene

Zero-surface shower channels include spiral hair&dirt traps that are easily removed and cleaned for reuse. Highly satisfying the expectations of hygiene-oriented users.

Fabric membrane sealing

The sealing with fabric membrane beneath shower channel integrates the product with construction in a more secure way. Drain body is solid and leak-proof.

Patented hair and dirt holder

Cover and dirt holder beneath can easily be removed and cleaned to get rid of unwanted particles.

Front wall and mid shower usage

TrendLine zero-surface shower channels can be used both in new projects and also in renovations. Based on your project front wall and center applications are possible. 360° Swivel trap options make installation easier.

Various dimensions with cuttable shower channels

TrendLine zero-surface shower channel is designed to be cuttable. This tailor made feature can help to have various dimensions in your projects.

TrendLine

Various dimensions with cuttable shower channels

TrendLine zero-surface shower channel is designed to be cuttable. This tailor made feature can help to have various dimensions in your projects.

Patented hair and dirt holder

Cover and dirt holder beneath can easily be removed and cleaned to get rid of unwanted particles.

Front wall and mid-shower usage

TrendLine zero-surface shower channels can be used both in new projects and in renovations. Front wall and center applications are possible, based on your needs. The 360° Swivel trap options make installation easier.

Siphon Options

Side outlet H:80 mm		SS.8081	Odourless S type trap 60 l/min
Side outlet H:60 mm		SS.8082	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		SS.8086	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		SS.8130	No S type 66 l/min
Side outlet H:75 mm		SS.8135	No S type 66 l/min

The values given are siphon capacity and vary according to the cover model.

Drain Body	Fabric membrane sealing	HS.8117

Inclined 3 mm solid shower channel

TrendLine shower channel is self inclined so water can flow to trap. By TrendLine there can be no unreachable areas for water.



Technical drawing

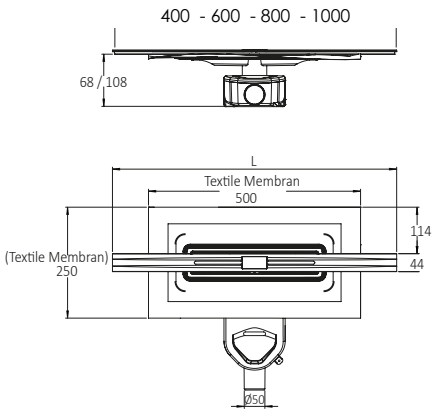

Cover	Satin Finish	40	60	80	100
Form - A		TDK.1100.40.1.S.I	TDK.1100.60.1.S.I	TDK.1100.80.1.S.I	TDK.1100.100.1.S.I

*(With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

ZetLine

Perfect match for new constructions and renovation projects.

NOVA / NATURA
Framed Cover

NOVA



Nova cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside while continuing to maintain integrity and elegancy in your bathroom.

Easy cleaning apparatus

NATURA



Designed for maximum hygiene

Zero surface shower channels include spiral hair and dirt traps that can easily be removed and cleaned for reuse. This highly satisfies the expectations of hygiene oriented users.

Waterless membran odor trap

Y.8181
(Optional)

Direct Connect

Y. 8176
(40 to 50 mm)

Y.8172
(40 to 45 mm)

Siphon Options

Side outlet H:80 mm		SS.8081	Odourless S type trap 60 l/min
Side outlet H:60 mm		SS.8082	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		SS.8086	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		SS.8130	No S type 66 l/min
Side outlet H:75 mm		SS.8135	No S type 66 l/min

The values given are siphon capacity and vary according to the cover model.

Drain Body	Fabric membrane sealing	HS.8117

Technical drawing



Cover	Inox Frame	40	50	60	70	80
Nova (Reversible solid or tile- in)		ZDK.1054.40.1.S.I	ZDK.1054.50.1.S.I	ZDK.1054.60.1.S.I	ZDK.1054.70.1.S.I	ZDK.1054.80.1.S.I
Unica		ZDK.1023.40.1.S.I	ZDK.1023.50.1.S.I	ZDK.1023.60.1.S.I	ZDK.1023.70.1.S.I	ZDK.1023.80.1.S.I
Quadra		ZDK.1088.40.1.S.I	ZDK.1088.50.1.S.I	ZDK.1088.60.1.S.I	ZDK.1088.70.1.S.I	ZDK.1088.80.1.S.I

* (With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

AlfaLine

Highly durable

Steel tank constructions with solid bodies serve for long-lasting usage.

Waterless membran odor trap

Y.8155
(Optional)

SS.8132
50 - 100/110 mm
Connection Part
(Direct Pipe Connect)

Easy cleaning apparatus

Designed for maximum hygiene

Zero surface shower channels include spiral hair and dirt traps that can easily be removed and cleaned for reuse. This highly satisfies the expectations of hygiene oriented users.

Technical drawing

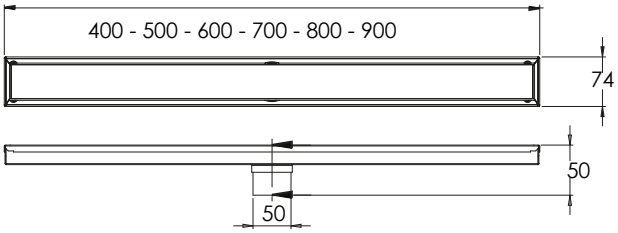

Perfect match for new constructions and renovation projects.

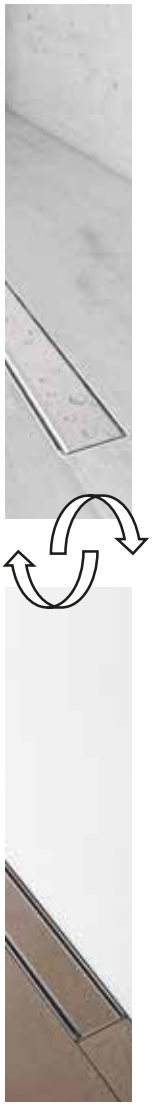

NOVA / NATURA

Framed Cover

NOVA



Nova cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside while continuing to maintain integrity and elegancy in your bathroom.

NATURA

Optional insulation flange

Own patented eccentric insulation body and protection cover that can be precisely adjusted in any direction

		40	50	60	70	80	90
Drain Base		HS.8155.17.40	HS.8155.17.50	HS.8155.17.60	HS.8155.17.70	HS.8155.17.80	HS.8155.17.90
Nova (Reversible solid or tile- in)		AL.1057.40.1.S.I	AL.1057.50.1.S.I	AL.1057.60.1.S.I	AL.1057.70.1.S.I	AL.1057.80.1.S.I	AL.1057.90.1.S.I
Unica		AL.1022.40.1.S.I	AL.1022.50.1.S.I	AL.1022.60.1.S.I	AL.1022.70.1.S.I	AL.1022.80.1.S.I	AL.1022.90.1.S.I
Quadra		AL.1089.40.1.S.I	AL.1089.50.1.S.I	AL.1089.60.1.S.I	AL.1089.70.1.S.I	AL.1089.80.1.S.I	AL.1089.90.1.S.I
Aira		AL.1084.40.1.S.I	AL.1084.50.1.S.I	AL.1084.60.1.S.I	AL.1084.70.1.S.I	AL.1084.80.1.S.I	AL.1084.90.1.S.I

CasaLine

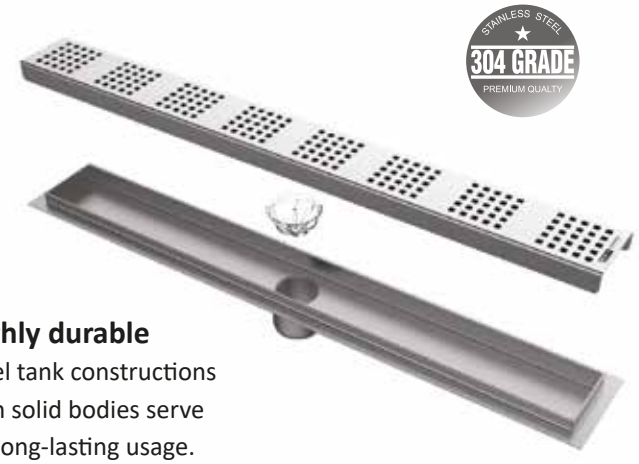

Highly durable

Steel tank constructions with solid bodies serve for long-lasting usage.

Waterless membran odor trap

Y.8155
(Optional)

SS.8132
50 - 100/110 mm
Connection Part
(Direct Pipe Connect)

Easy cleaning apparatus

Designed for maximum hygiene

Zero surface shower channels include spiral hair and dirt traps that can easily be removed and cleaned for reuse. This highly satisfies the expectations of hygiene oriented users.

Technical drawing

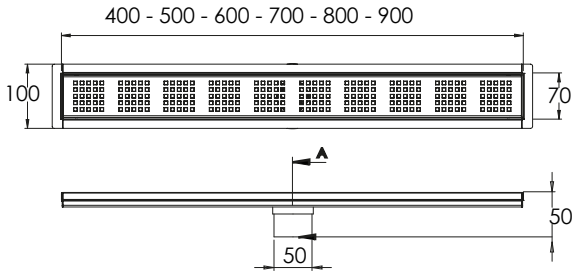

Perfect match for new constructions and renovation projects.

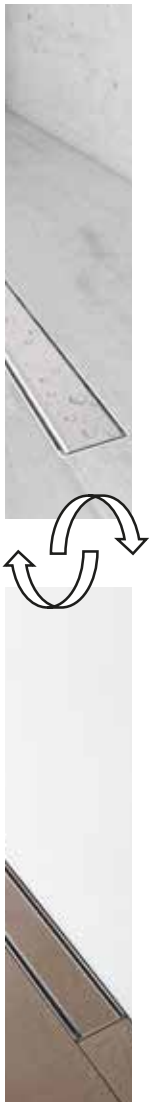

NOVA / NATURA

Framed Cover

NOVA



Nova cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside while continuing to maintain integrity and elegancy in your bathroom.

NATURA

Optional insulation flange

Own patented eccentric insulation body and protection cover that can be precisely adjusted in any direction

		40	50	60	70	80	90
Drain Base		HS.8159.17.40	HS.8159.17.50	HS.8159.17.60	HS.8159.17.70	HS.8159.17.80	HS.8159.17.90
Nova (Reversible solid or tile- in)		CA.1058.40.1.S.I	CA.1058.50.1.S.I	CA.1058.60.1.S.I	CA.1058.70.1.S.I	CA.1058.80.1.S.I	CA.1058.90.1.S.I
Unica		CA.1021.40.1.S.I	CA.1021.50.1.S.I	CA.1021.60.1.S.I	CA.1021.70.1.S.I	CA.1021.80.1.S.I	CA.1021.90.1.S.I
Quadra		CA.1083.40.1.S.I	CA.1083.50.1.S.I	CA.1083.60.1.S.I	CA.1083.70.1.S.I	CA.1083.80.1.S.I	CA.1083.90.1.S.I
Aira		CA.1086.40.1.S.I	CA.1086.50.1.S.I	CA.1086.60.1.S.I	CA.1086.70.1.S.I	CA.1086.80.1.S.I	CA.1086.90.1.S.I

Trendline Technical Details

Application Details

Covering material

Insulation layer

Selfmeshed insulating flange

Levelling concrete

Covering concrete

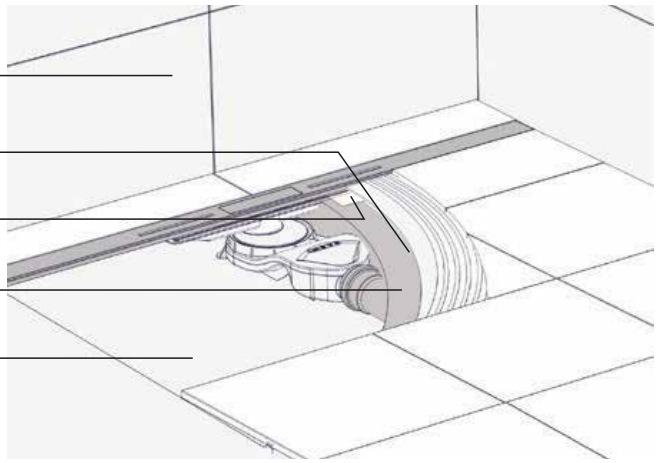

Shower Channel

Form - A

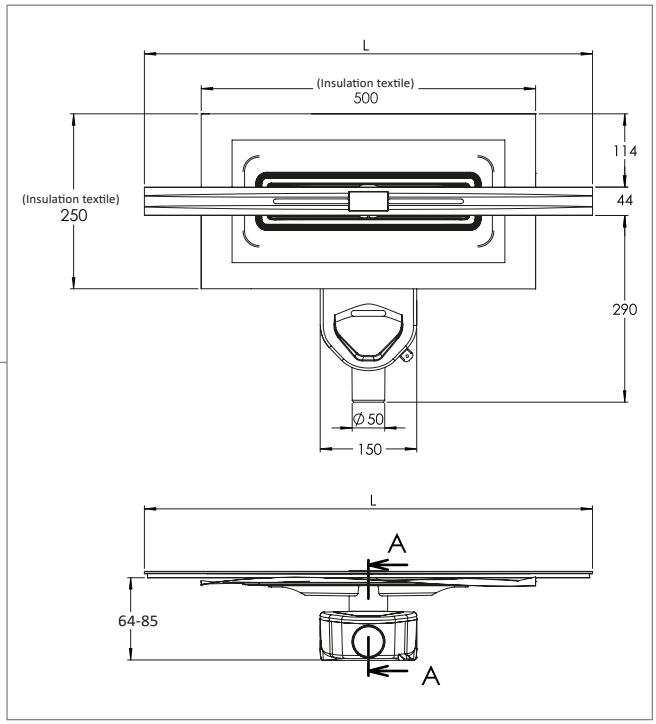

Drain Body

Body with fabric membrane

Odourless

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

Side outlet
H:80 mm

Odourless S type
trap 60 l/min

Vertical outlet
H:50 mm (Core drill 120 mm)

Odourless S type
trap 84 l/min

No Trap

Vertical outlet
H:50 mm
(Core drill 70 mm)

66 l/min

Side outlet
H:75 mm

66 l/min

The values given are siphon capacity and vary according to the cover model.

Siphon Water Depth Technical Details

Odourless

Side outlet
H:80 mm

Odourless S type
** trap 60 l/min

SS. 8081

50 mm
water seal

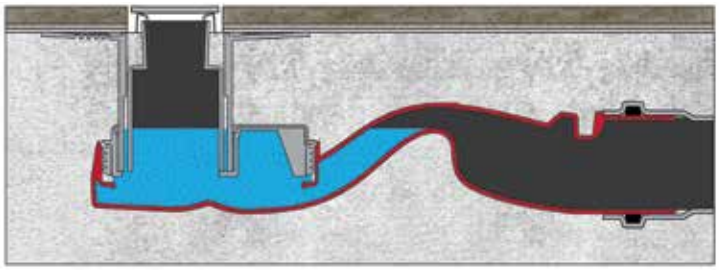

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

SS. 8082

30 mm
water seal

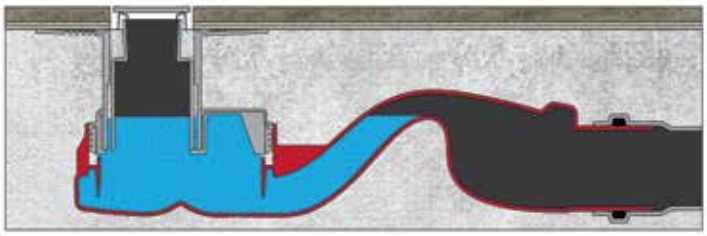

Vertical outlet
* H:50 mm

Odourless S type
** trap 84 l/min

SS. 8086

32 mm
water seal

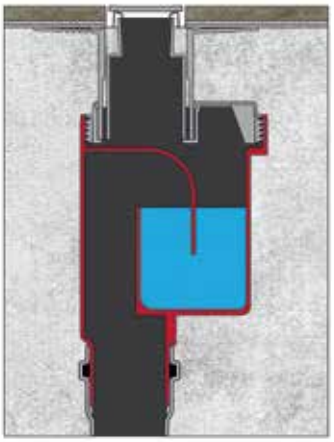

** Tested in accordance with EN-1253 Standards at TUV Germany Laboratories.

No Water Trap

Vertical outlet
*** H: 50 mm

No S type
66 l/min

SS. 8130

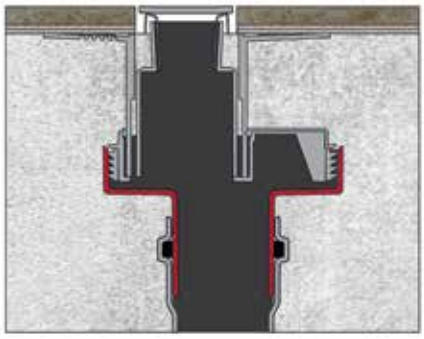

Side outlet
H:75 mm

No S type
66 l/min

SS. 8135

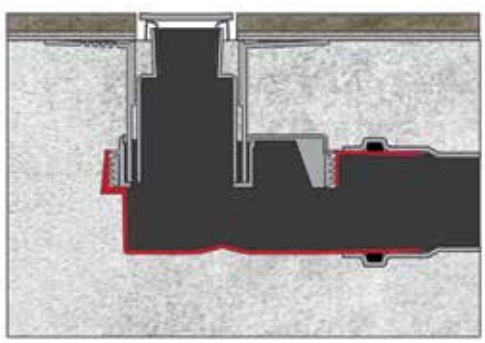

* (With 120 mm Carot Drill) *** (With 70 mm Carot Drill)

Montage

























For Trendline Series









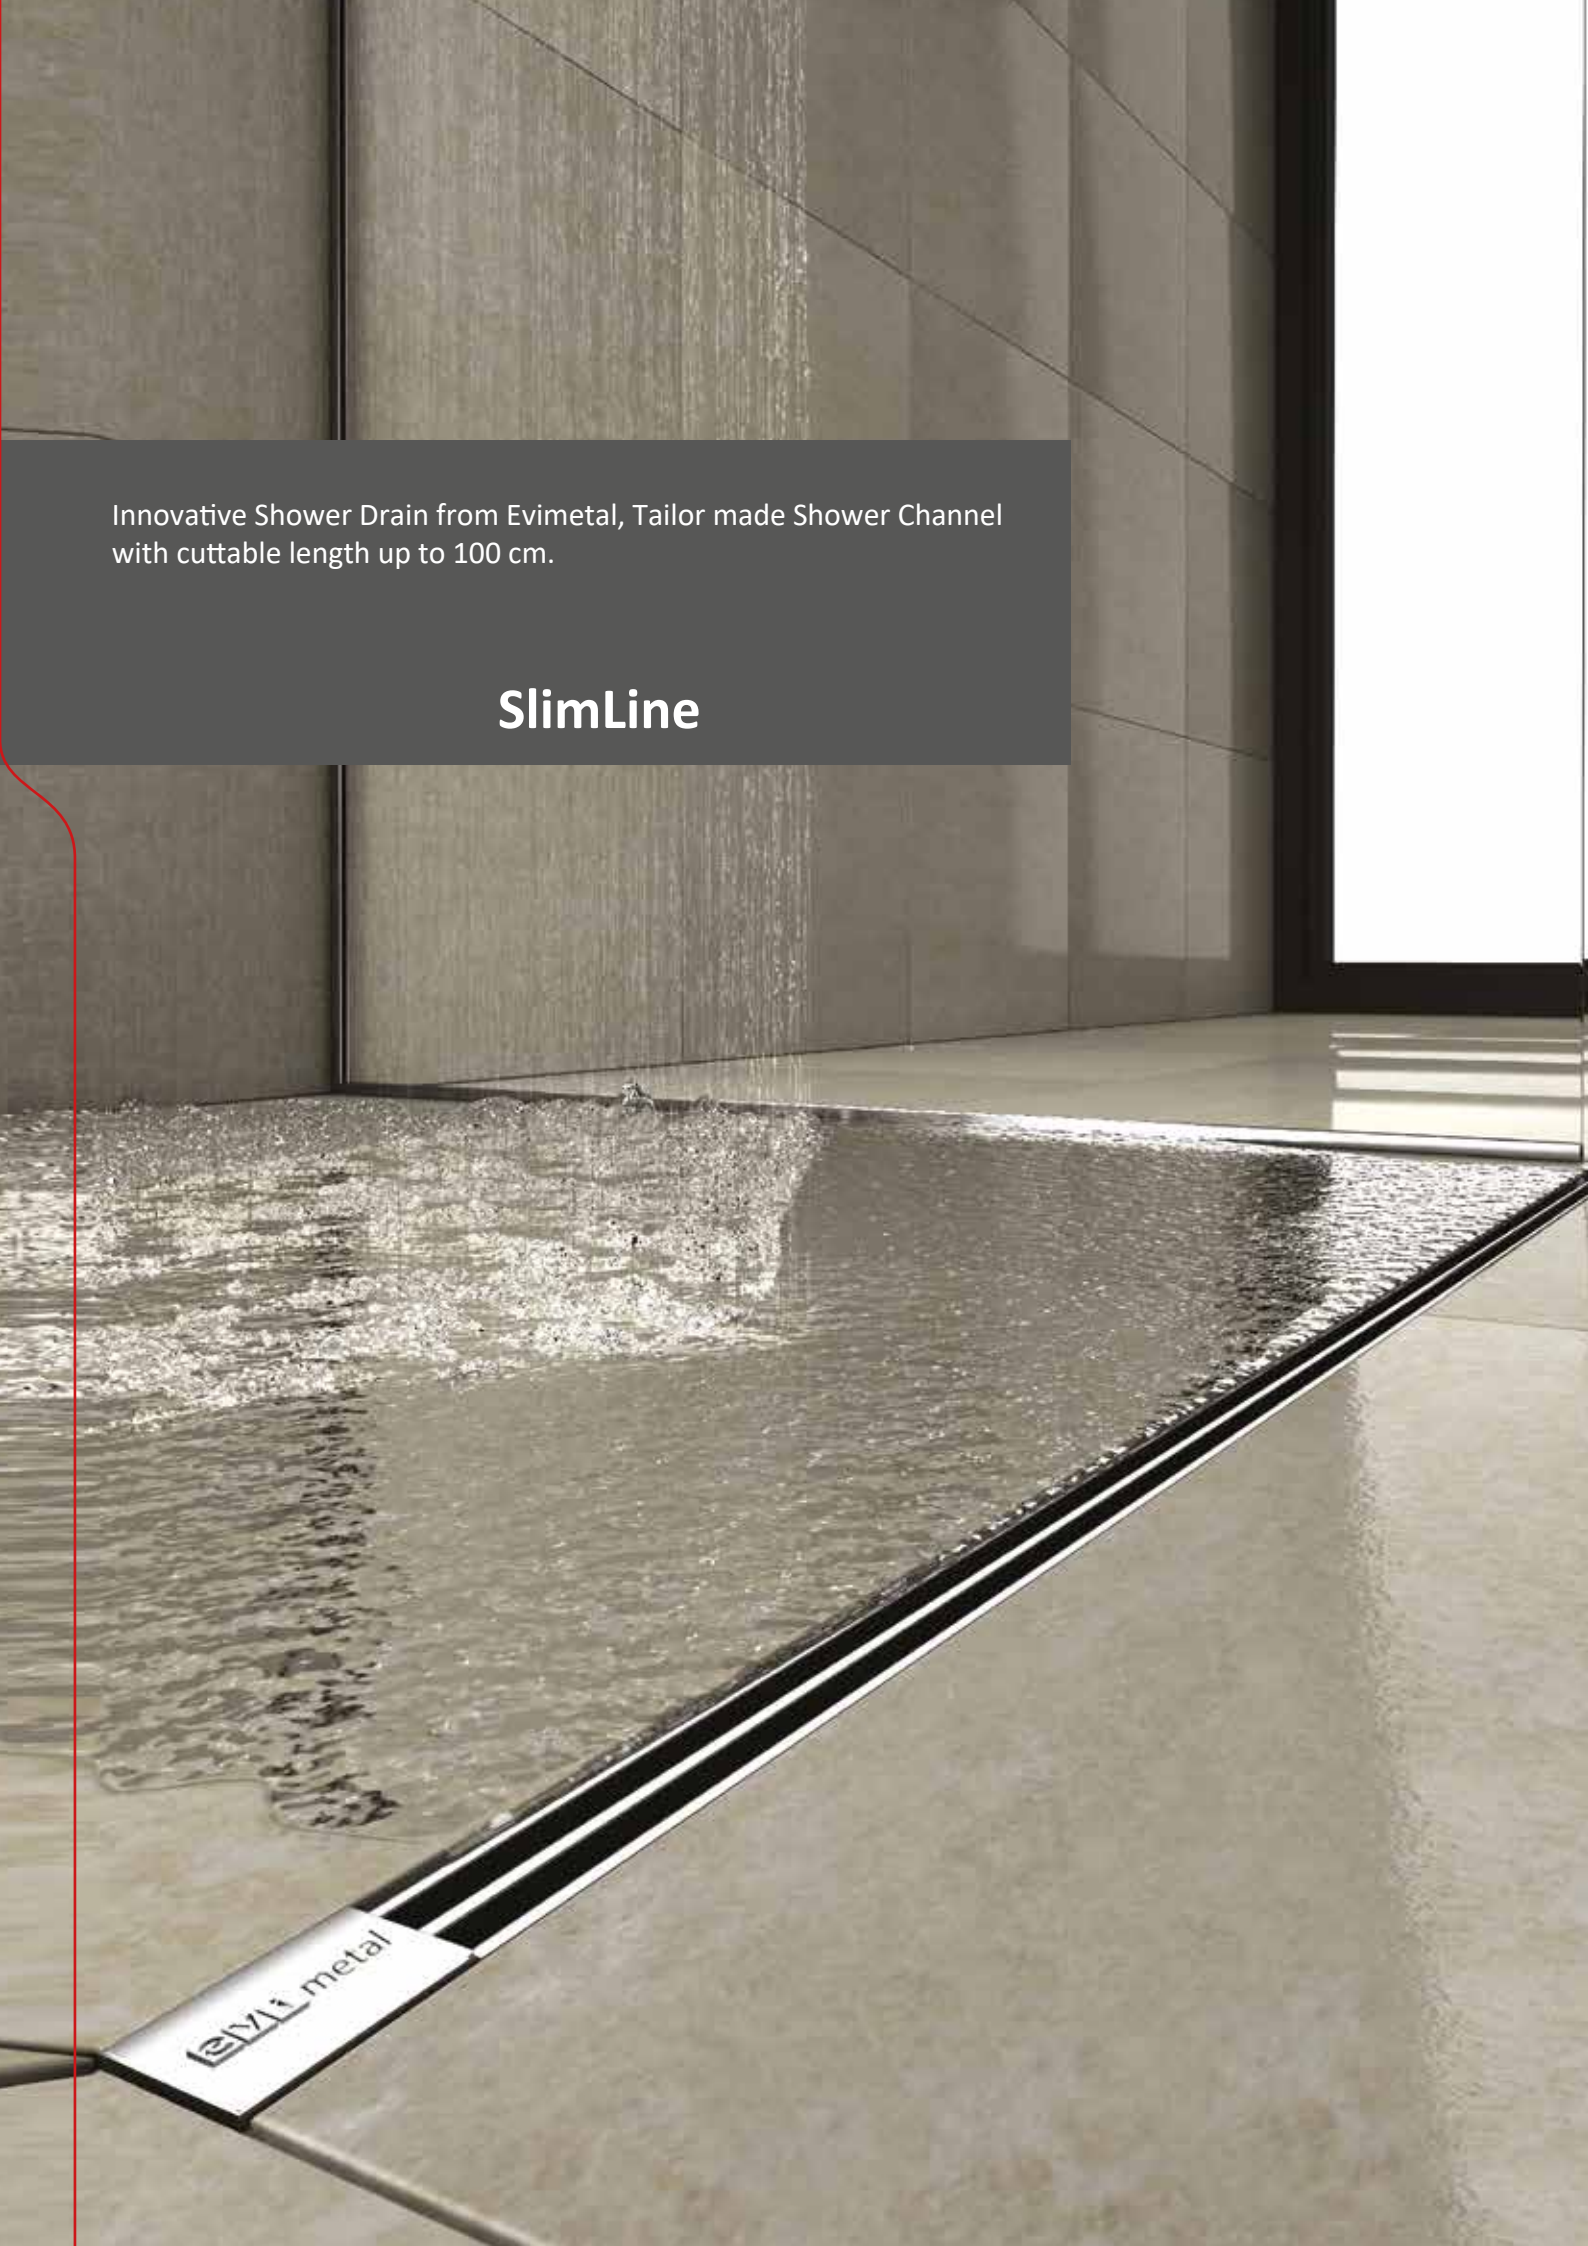

Innovative Shower Drain from Evimetal, Tailor made Shower Channel with cuttable length up to 100 cm.

SlimLine

Shower Channels and Drain Body Options

NATURA

Compatible with your own covering material.

With NATURA cover a seamless installation is possible, compatible with each covering material you will use.

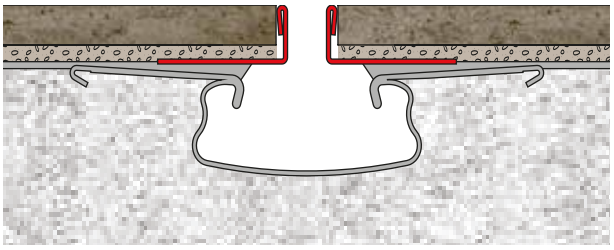

NORMA

Slot Channel

One piece - 24 mm width with 3 thin slots gives an elegant outlook.

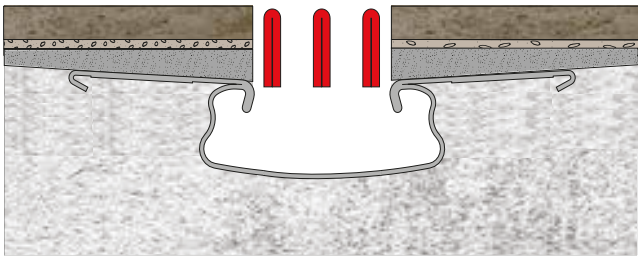

LINEA

Metal cover

One piece - 24 mm width helps to have a practial use.

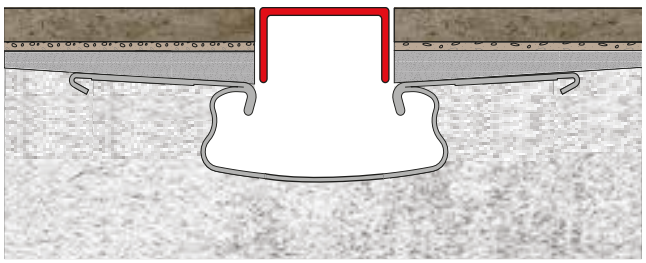

Solutions for Shower

Trap structure that helps to have an easy installation by both center outlet and 360º swivel trap connecting to the waste pipes.

Drain body with centered trap outlet Slot Shower Channel

Technical Details

Application Details

Covering material

Evimetal insulation butil band

Adhesive

Insulation layer

Levelling concrete

Covering concrete

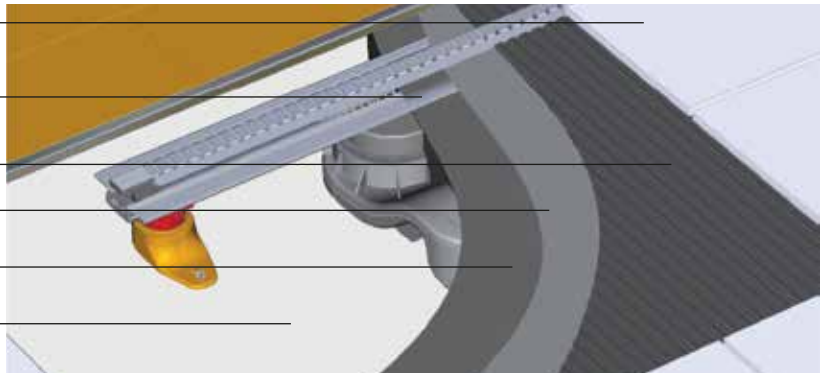

Body

Body with center trap outlet

Piece for leak proof Y.8089

Body height adjustment set Y.8085

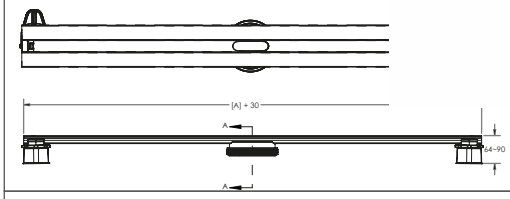

A : 600mm I 1000mm

Body with side trap outlet

Piece for leak proof Y.8089

Body height adjustment set Y.8085

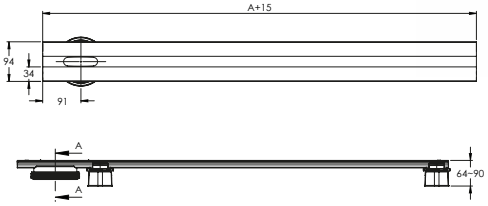

A : 585mm I 985mm I 1985mm I 2985mm

Shower Channels

NORMA COVER

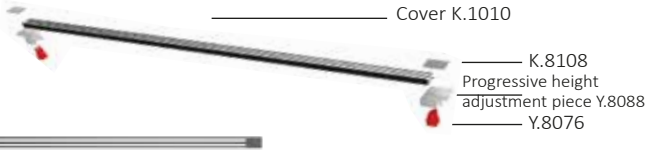

A : 600mm I 1000mm



LINEA COVER

A : 1000mm I 2000mm I 3000mm



LDK NATURA COVER

A : 1000mm I 2000mm I 3000mm



2 pcs of Prf 100 or Prf 400 profile should be ordered based on covering material.

Evimetal linear channels

Balcony and Terrace Solutions

SlimLine Linear Channel thanks to along the length channel structure, issues like ponding or water accumulation can be eliminated while having a clean but also stylish look.
A significant issue for the balcony cleaning is dismissed by the water directed to drain with Evimetal Linear Channel.

Compatibility with Covering Material

Natura cover makes each covering material possible to be used by your desire.

High Drainage Capacity

You may already be witnessed to ponding caused by negative incline, wrong workmanship or product choice. These applications create not only problems for functionality but also creates unpleasant view. SlimLine Linear Channels can prevent these problems right from the installation.
Together with the drain body with sealing and optional odourless traps, unwanted water will flow away.

Drain Body with Sealing

Solid metal body integrated with Evimetal sealing is designed for hard conditions and high flow rates.

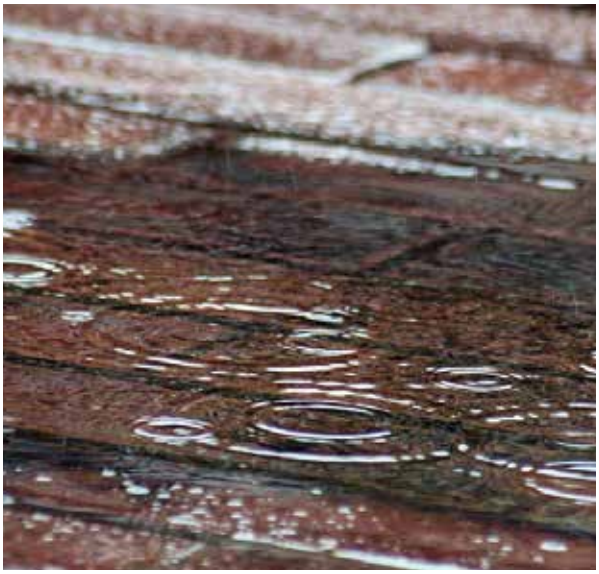

Balcony and terrace drains Easy installation by cuttable in specific dimensions up to 600 cm

SlimLine Linear channel

Desired dimension

Channels manufactured in optional dimensions
of 100-200 and 300 cm can be cuttable to have your tailor made solution.
By this tailor made feature, channels can be easily used in projects even
if there are different dimensions.

100

200

300

600

Manufactured only for projects.

Natura

Evimetal Slot Shower Channels

Solutions for Shower

Evimetal presenting unlimited designs in bathrooms is now creating slim shower channel trend by SlimLine. Patented structure maintains easy installation and secure usage. Functionality with fineness and style is now in bathrooms with SlimLine.

Drain Body with Sealing

Solid metal body integrated with Evimetal sealing is designed for hard conditions and high flow rates.

Only 24 mm



Perfect visual finish with only 24 mm width SlimLine channels. Thanks to it's thin structure creating charm.

Limitless solutions

90º corner connector H.8166

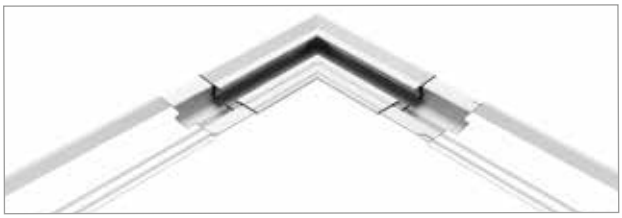

Serial connector H.8162

Easy Cleaning

Cover and dirt holder beneath can easily be removed and cleaned to get rid of unwanted particles.



Head siphon connector H.8165

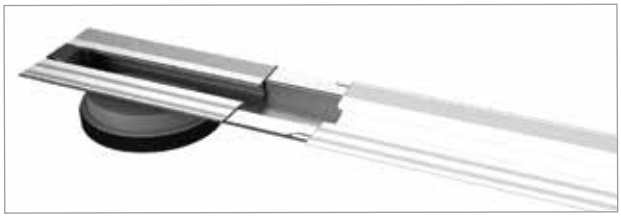

Additional siphon connector H.8167

Cuttable structure, high precision

Channels and drain bodies manufactured in 60 and 100 cm can be cut into specific dimensions you desire. By this tailor made feature, channels can be easily used in projects even if there are different dimensions.

SlimLine

Perfect visual finish with only 24 mm width SlimLine channels, thanks to its thin structure creating charm.

Only 24 mm

Evimetal, known for presenting unlimited designs in bathrooms, is now creating a slim shower & balcony channel trend by SlimLine. Our patented structure maintains easy installation and secure usage.

Drain Body with Sealing

Solid metal body integrated with Evimetal sealing is designed for hard conditions and high flow rates. Functionality meets finesse and style now in bathrooms with SlimLine.

Easy Cleaning

Cover and dirt holder beneath can easily be removed and cleaned to get rid of unwanted particles.



Siphon Options

Side outlet H:80 mm		**SS.8081**	Odourless S type trap 60 l/min
Side outlet H:60 mm		**SS.8082**	Odourless S type trap 42 l/min
Vertical outlet * H:50 mm		**SS.8086**	Odourless S type trap 84 l/min
Vertical outlet ** H: 50 mm		**SS.8130**	No S type 66 l/min
Side outlet H:75 mm		**SS.8135**	No S type 66 l/min

* (With 120 mm Carot Drill) ** (With 70 mm Carot Drill)

The values given are siphon capacity and vary according to the cover model.

NORMA
Slot Channel

One piece - 24 mm width with 3 thin slots gives an elegant outlook.



LINEA
Metal cover

One piece - 24 mm width helps to have a practial use.



NATURA
Compatible with your own covering material.

With NATURA cover a seamless installation is possible, compatible with each covering material you use.



Easy-to-cut structure, high precision

By this this tailor made feature, channels can be easily used in projects even if different dimensions are needed.

		60	80	100	200	300
Drain Base (head outlet)		HS.8066.60.MK	HS.8066.80.MK	HS.8066.100.MK	HS.8066.200.MK	HS.8066.300.MK
Drain Base (middle outlet)		HS.8066.17.60	HS.8066.17.80	HS.8066.17.100	HS.8066.17.200	HS.8066.17.300
Norma		LDK.1010.60.1.S.I	LDK.1010.80.1.S.I	LDK.1010.100.1.S.I		
Linea				LDK.1070.100.1.S.I	LDK.1070.200.1.S.I	LDK.1070.300.1.S.I
***** Natura**		15 cm Natura cover	LDK.1090.81361.S.I			

*** 2 pcs of prf 100 or prf 400 profile should be ordered based on covering material.

Siphon Water Depth Technical Details

Odourless

Side outlet
H:80 mm

Odourless S type
** trap 60 l/min

SS. 8081

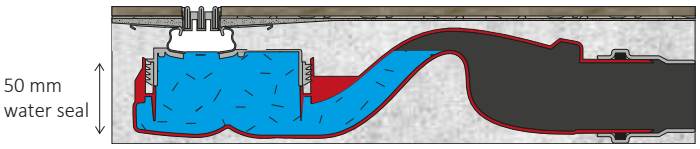

Side outlet
H:60 mm

Odourless S type
trap 42 l/min

SS. 8082

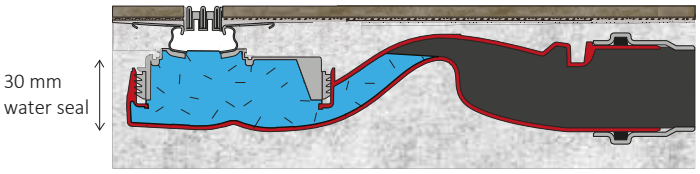

Vertical outlet
* H:50 mm

Odourless S type
** trap 84 l/min

SS. 8086



** Tested in accordance with EN-1253 Standards at TUV Germany Laboratories.

No Water Trap

Vertical outlet
*** H: 50 mm

No S type
66 l/min

SS. 8130



Side outlet
H:75 mm

No S type
66 l/min

SS. 8135

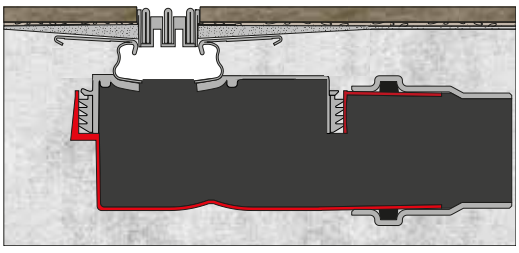

* (With 120 mm Carot Drill) *** (With 70 mm Carot Drill)

Montage


Set the channel length.


Insert the sealing parts into the channel area.


Cut the channel with stainless steel cutter.


Screw the sealing parts.


Connect the height adjustment parts of the body.


Connect drain to the channel.


Place the linear channel to the floor.


Adjust height adjustment set. Mark the points according to the ground level.


Make holes off marked points, inside the channel to fix height adjustment sets.


Fix the channel to the floor


Connect the shower channel to the installation and put the protective styrofoam on it in case of blockage.


Bevel the angle of levelling concrete min. 1% towards shower channel.


Apply priming coat to leveling concrete. Adhere the isolation tape to the metal-concrete.*


Cut the bant from the marked points with craft knife.


Put Styrofoam and spread the ceramic adhesive to the surface.


Do not remove the protective styrofoam until the ceramic application is completed.


Remove the protective styropor and adjust the level the gradual parts with scale from each point.


Place the cover adjustment set to the channel.


Cut the cover according to the body lenght.


Install the fixingcovers again after the adjustment process and then place the cover.

For assembly video

Slope shower profile

Linearis is stainless steel slope profile with easy application feature. Can be used at all shower areas. For both left and right usages, 3 different surfaces are avaible.

surface	100 cm right 13 mm / 28 mm	100 cm left 13 mm / 28 mm
SATINOX	LMP.R.100.100.1.S.I	LMP.L.100.100.1.S.I
MIRROR	LMP.R.100.100.2.S.M	LMP.L.100.100.2.S.M
GOLD	LMP.R.100.100.3.M.G	LMP.L.100.100.3.M.G

	150 cm right 13 mm / 35 mm	150 cm left 13 mm / 35 mm
SATINOX	LMP.R.100.150.1.S.I	LMP.L.100.150.1.S.I
MIRROR	LMP.R.100.150.2.S.M	LMP.L.100.150.2.S.M
GOLD	LMP.R.100.150.3.M.G	LMP.L.100.150.3.M.G

no slope shower profile

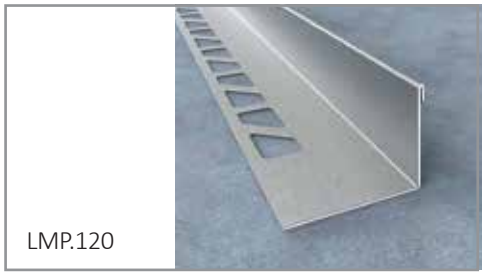

code	surface	250 cm 28 mm
LMP.120	SATINOX	LMP.120.250.1.S.I
	MIRROR	LMP.120.250.2.S.M
	GOLD	LMP.120.250.3.M.G

Suitable for left and right usage.
Can be cut according to shower area.

Perfect details

Application products

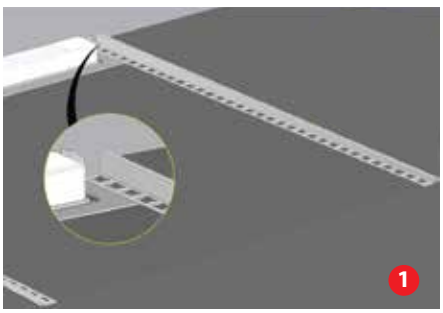

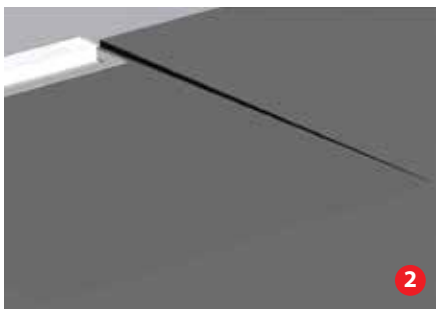

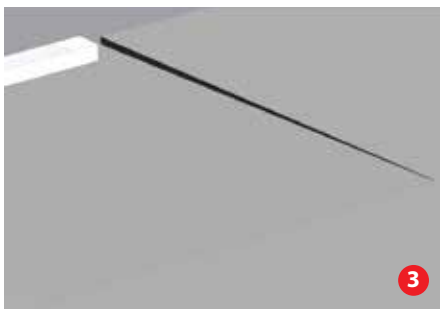

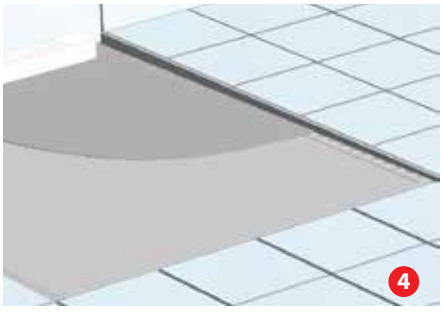

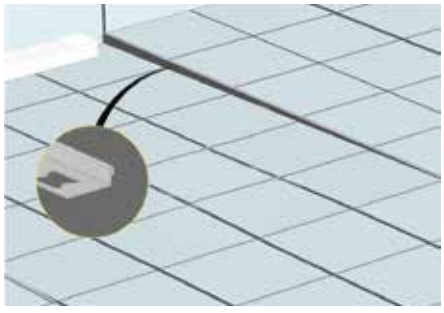

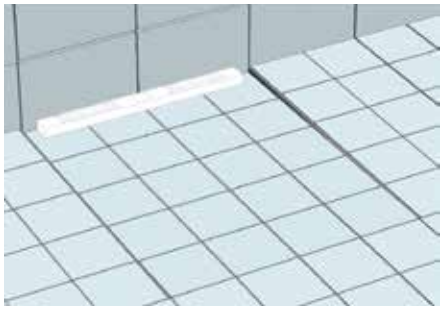

ISOLATION DETAILS

WATERPROOF (SEALING) MEMBRANE

TYM.105	Waterproof (sealing) membrane	1x30mt.

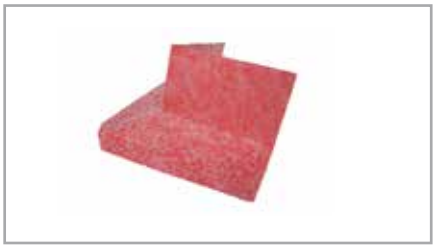

TYM.106	Waterproof (sealing) membrane - Outer edge

TYM.107	Waterproof (sealing) membrane - Inner edge

TYM.108	Waterproof (sealing) membrane pipe collar	12 x 12 cm

TYM.109	Waterproof (sealing) membrane edge band	12cm x 50mt.

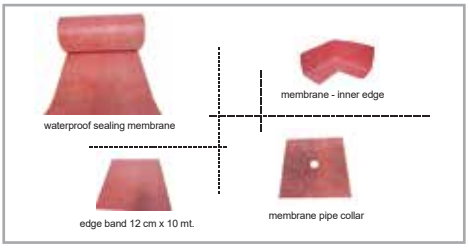

TYM.110	Izoteks insulation set

WALL APPLICATION

Step 1
- Trim sealing membrane to the size of the subfl oor/ wall to be sealed/waterproofed.

Step 2
- Stir tile mortar (C2 type) according to manufacturer's guidelines. Apply with a 5/32"x5/32" (4mm) tooth trowel.
- It is important to achieve an even mortar thickness.

Step 3
- Apply the membrane according to the job specification domestic or commercial / public buildings - on the wall from top to the bottom and from the center to the edges.

Step 4: Domestic area: Avoid air pockets and wrinkles and make sure that the overlapping seams are 2 inche (5 cm)minimum. Remove excess tile mortar at the edges.

Step 4: Commercial/public area: Apply suffi cient fl uid sealant at the butt seam area so that a waterproof tape/fl ashing can be easily embedded on top of the butt seam in order to avoid any water/moisture penetrati**on.**

Step 5: Apply tile mortar on the entire surface and start tiling.

Step 6: Transitions between wall to fl oor should be 2-sided sealed with silicone.

FLOOR APPLICATION



Step 1
- Trim uncoupling membrane to the size of the floor being covert.
- Prepare the floor with a suitable primer beforeapplying the mortar with a 5/32" x 5/32" (4 mm x 4 mm) tooth trowel



Step 2
- Install the uncoupling membrane in a very accurate way to avoid all air pockets, excessive mortar, and over lapping at the seam (butt seam only).



Step 3 (only needed if sealing membranes, sealing/ waterproofing tapes and corner pieces are being used).
- After installation of the uncoupling membrane sealing tapes and corner pieces are supposed to be installed on top of the uncoupling membrane according to specification.

Step 4
- For waterproofing the floor all butt seams at the uncoupling membrane should be separately sealed with a sealing tape or other suitable coatings/ sealants.
- Stir tile mortar (at least C2 or similar quality) according to manufacturer's guide line and apply with a (8 mm x 8 mm) tooth trowel (depending on the tile size) on top of the uncoupling membrane.
- For mosaic tiles a separate load distribution layer is necessary.
- Tiling can start immediately.

		30	40	50	60	70	80
External frame	Can be used to hide finishing problems after application by joining above ceramic ,compatible with CDK 1050 series covers	SATINOX	SATINOX	SATINOX	SATINOX	SATINOX	SATINOX
		CHC.30.1.S.I	CHC.40.1.S.I	CHC.50.1.S.I	CHC.60.1.S.I	CHC.70.1.S.I	CHC.80.1.S.I

Perfect harmony, high drainage floor drains

PuntoMix Point Drain

Evimetal Floor Drains

Floor Drain with Spirograph

Height adjustment brings compatibility with different application heights and also compact body structure lets low height installation be possible. Can be also used in renovations for zero-surface shower applications. Water curtain option eliminates bad odor and hair sieve can prevent clogging because of hair or dirt particles.

Drain body with spirograph

Drain body with spirograph will have a much durable bonding with concrete and insulation. You will deliver qualified results even for thin concrete slabs.

Various trap options

Floor drains with spirograph offers high flow rate with 5 different trap options. Water curtain built inside the trap protects bad smells.

Hidden frame

With cover surrounded by a thin and hidden frame will allow almost seamless finish between covering material and drain. Perfect finish and a better look.

Easy cleaning

Cover and dirt holder beneath can easily be removed out and leftover particles can be taken out when needed.

Compatibility with your own covering material

You can use each of your desired covering material with Natura floor drain cover that will perfectly fit your project.

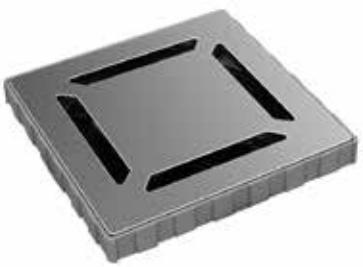

Perfect approach

Evimetal floor drains with spirograph has high end features both for functionality and technical design. You can find best solutions for your projects with variable dimensions and different cover options. To have more color options for your projects, you get in touch with Evimetal.

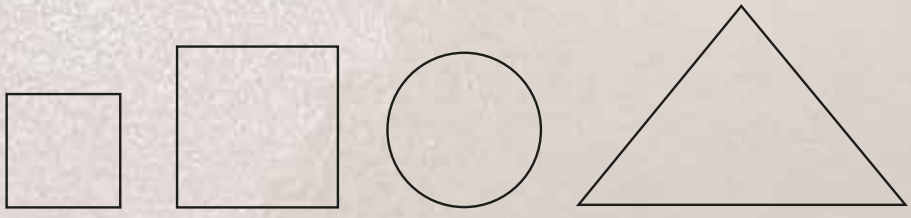

10x10 **15x15** **Ø 13.5** **20x20x28**

Evimetal Floor Drains

Floor Drains with insulation flange

Evimetal floor drains with insulation flange offers features like easy installation, 3 mm thickness solid cover, various detailed solutions and eccentric adjustment system that meets high expectations. Square, round and triangle cover types with front wall installation option brings best solutions for your projects.

Hidden frame

With cover surrounded by a thin and hidden frame will allow almost seamless finish between covering material and drain. Perfect finish and a better look.

Drain body with insulation flange

If the drains can not be connected with insulation permanently, then water leakage can happen. Using drains with insulation flange will be no longer a possibility for water leakage.

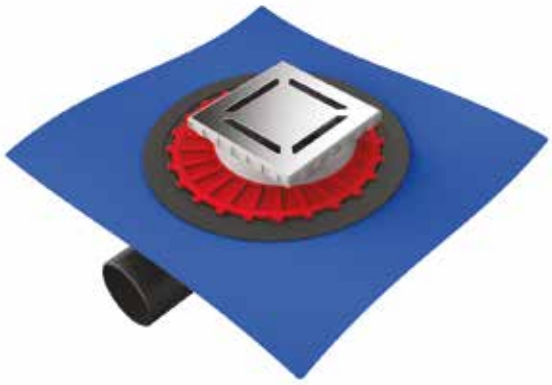

Eccentric drain head

Drain head can rotate so that installation will be easier to match the connection.
By rotating eccentric part, the installation distance can be easily adjusted.

Odorless

Patented odor free sphere and easy clean odor trap will never let you to have bad odor.

Odor trap

Odor free sphere
(Optional)

On front of the wall application

Patented eccentric body provides high flow rate and also flipping it by 90° on will make front of the wall application possible. Covering materials that has different thickness are compatible with wall drains with insulation flange. For wet duty public areas, floor drain with insulation flange should be preferred.

Secure solutions for wet duty spaces

Evimetal floor drains with insulation flanges are compatible with various water and heat insulation materials. You will deliver perfect results by using square and round floor drains with insulation flange for new constructions, renovations, zero-surface shower applications, roof and balcony applications.

10x10 **15x15** **Ø 13.5** **20x20x28**

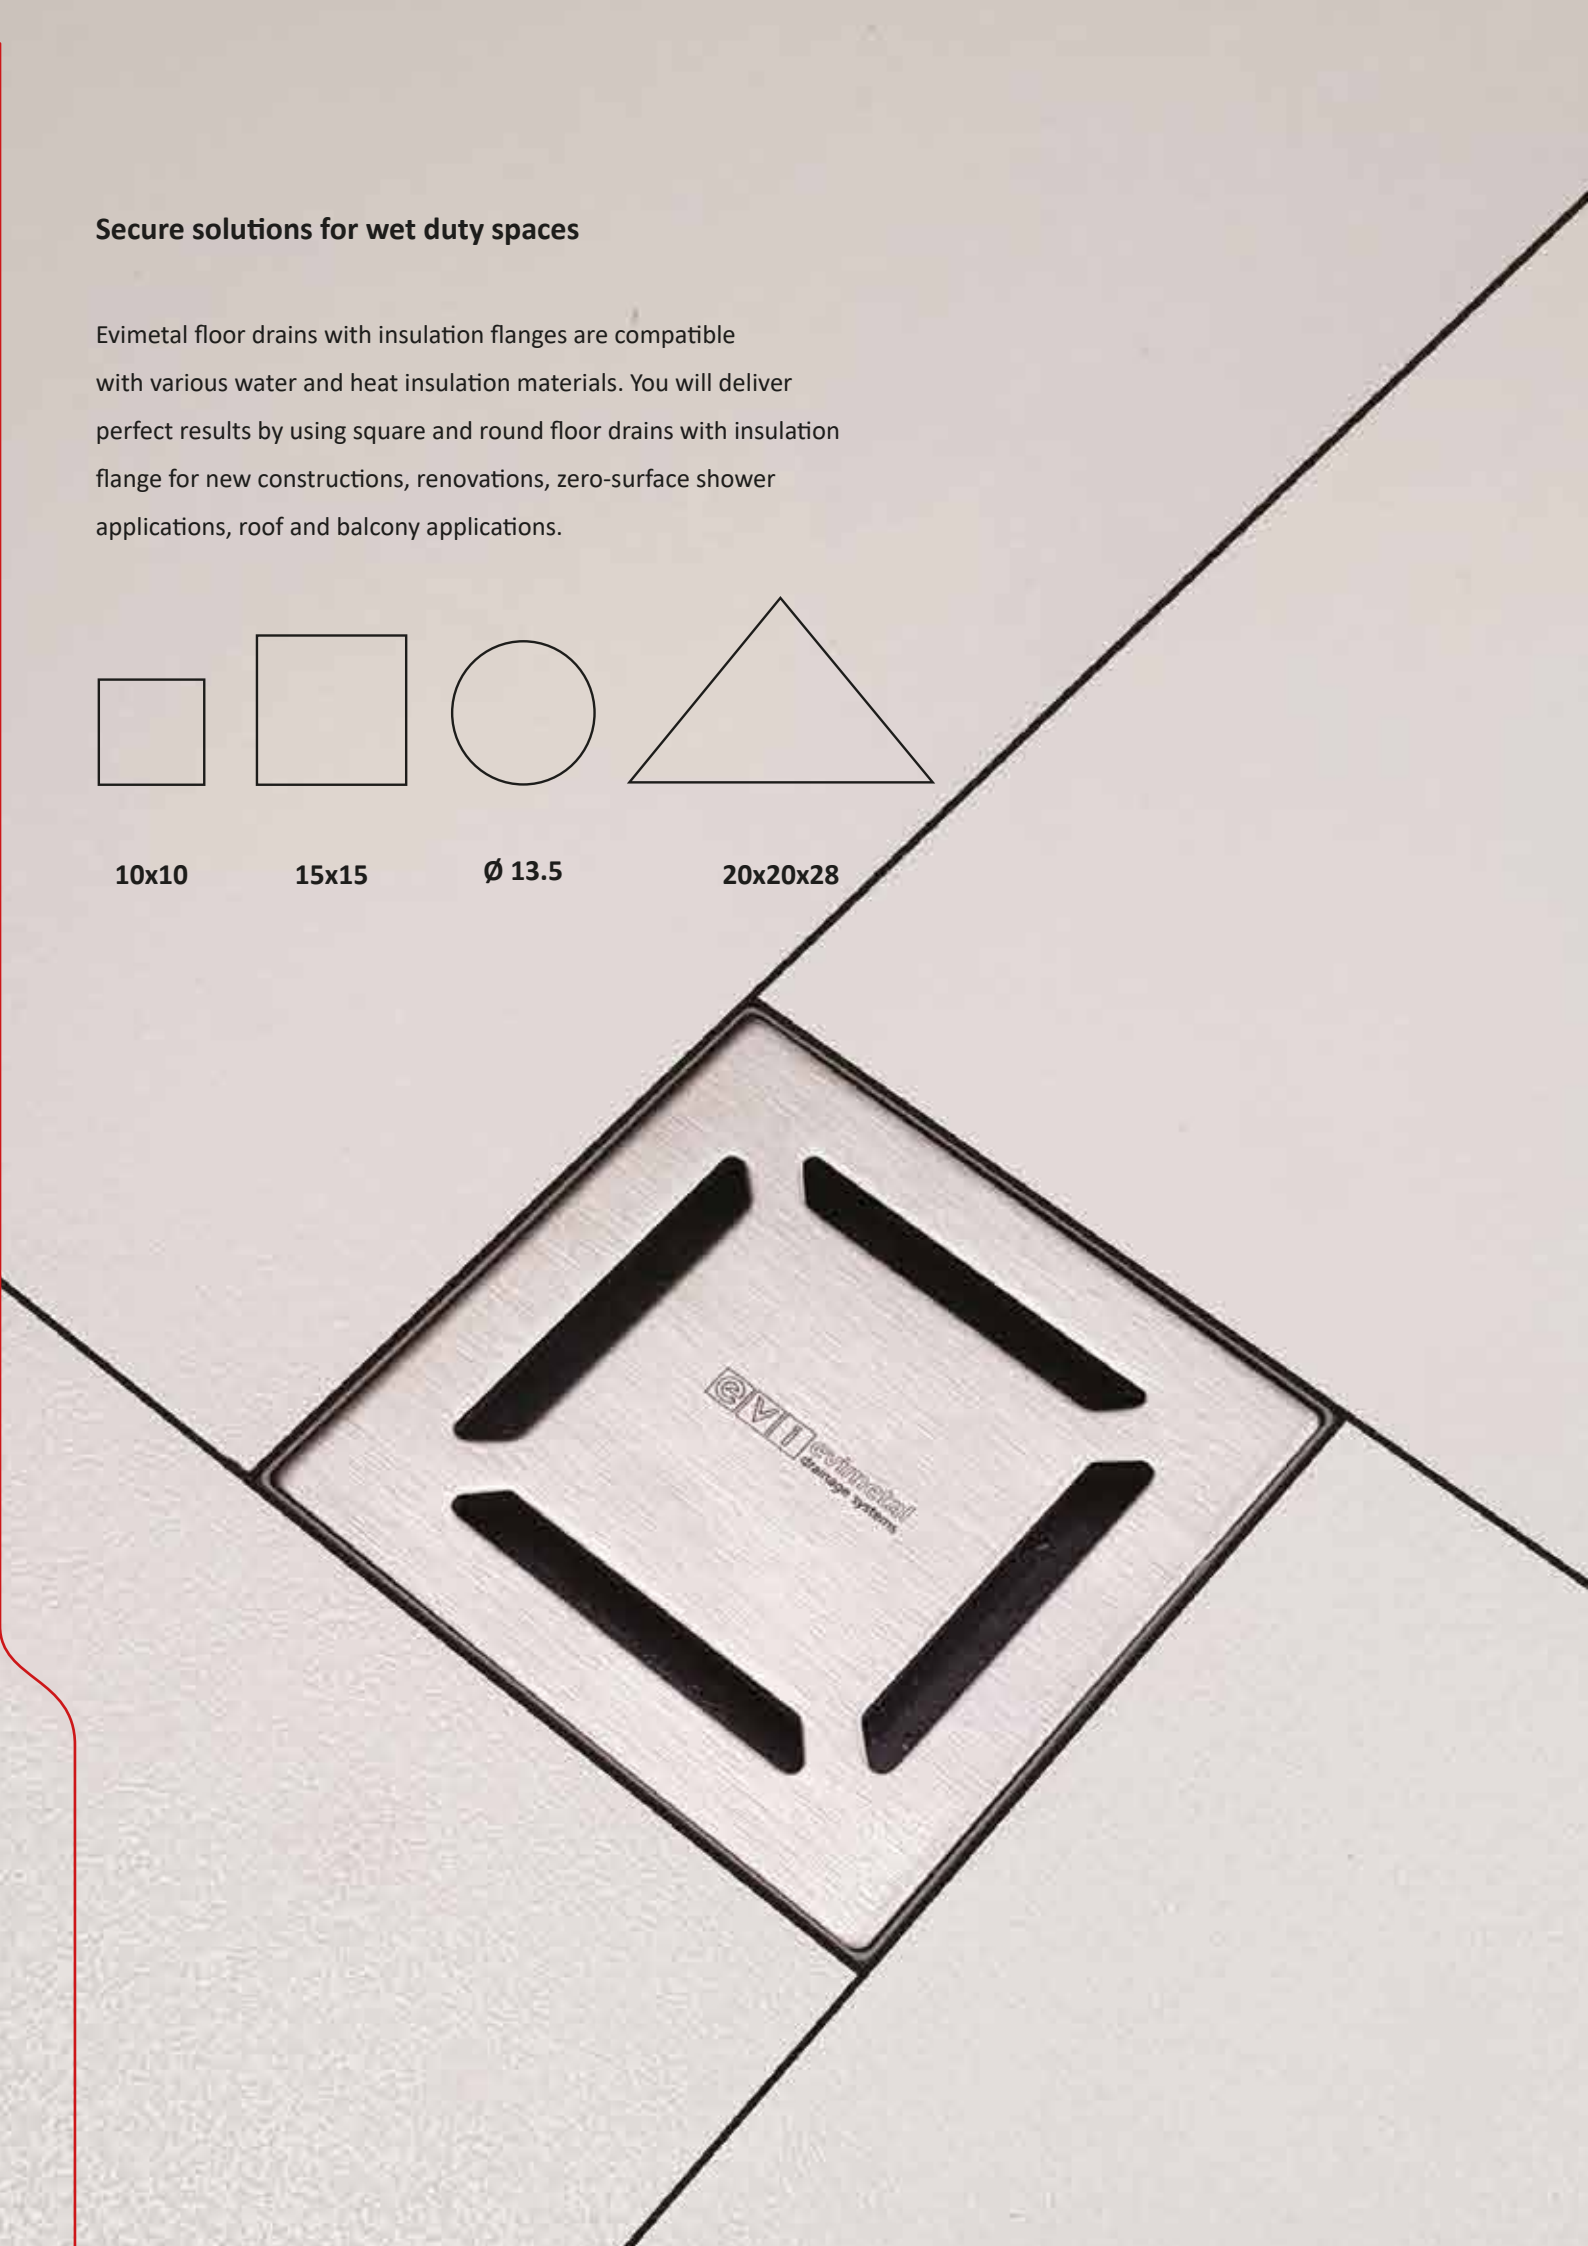

Evimetal Floor Drains

Classic Floor Drains

Evimetal classic floor drain is the optimum solution for wet duty places required not so high flow rate and insulation, economic alternative with odorless and easy clean features. You can easily use this basic but functional, secure and good looking classic floor drain.

Odorless

You will never face odor problem which is the most important problem of most floor drains.

Stainless Steel Cover

Stainless Steel (304) covers have an impressive look. Color options will have an integrity with spaces in your projects.

Compatibility with your own covering material

You can use each of your desired covering material with Natura floor drain cover that will perfectly fit your project.

Better flow rate

In wet duty spaces especially bathroom and public areas, floor drains are used for cleaning purposes and also can be used to be secure if there is an overflow.

Hidden frame

With cover surrounded by a thin and hidden frame will allow almost seamless finish between covering material and drain. Perfect finish and a better look.

Compact and Functional Design

Evimetal classic floor drains, with its smaller body structure and compact design, is a perfect fit especially for low application project needs. In classic floor drains various dimension options, cover structure and high flow rate will provide you optimum solution.



10x10 **15x15**

Covers

Nova

Unica

Aqua

Greka

Aqua

Nova

Greka

Natura

Natura

Nova

Greka

Aqua

Stainless Steel Frame

H.8168.22.15

H.8168.22.10

H.8171.17.15

H.8171.17.10

H.8170.22.15

H.8170.22.10

Plastic Frame

H.8168.18.15

H.8168.18.10

Y.8063.135

Y.8063.10
Y.8063.15

Extension Part

Y.8091

Y.8099

Siphons Odor Parts

Y.8081

Y.8082

Y.8086

Y.8066


Y.8065

Y.8072

Y.8067

Y.8161

Y.8183

Y.8100

Y.8163.30

Y.8163.50

Y.8155

Y.8181

Y.8174

Y.8084

Y.8064

Y.8172

Y.8134

Color Options For Projects

Shine

Anthracite

Dark Black

Mirror Gold

Satine Gold

Satine bronze

YYS Series (Complete Set Plastic Frame)

Insulated, odor preventing, stainless grid floor drains






nova 050 | aqua 080 | unica 300 | natura 090 | nova Ø135 | natura Ø135 | nova 20x20x28 | aqua 20x20x28

dimension (cm)	surface	side outlet	vertical outlet
unica 300 10x10	SATINOX MIRROR GOLD	YYS.1.50.300.10.1.S.I YYS.1.50.300.10.2.S.M YYS.1.50.300.10.3.M.G YYS.1.50.300.10.5.S.P	YYS.3.50.300.10.1.S.I YYS.3.50.300.10.2.S.M YYS.3.50.300.10.3.M.G YYS.3.50.300.10.5.S.P
unica 300 15x15	SATINOX MIRROR GOLD	YYS.1.50.300.15.1.S.I YYS.1.50.300.15.2.S.M YYS.1.50.300.15.3.M.G YYS.1.50.300.15.5.S.P	YYS.3.50.300.15.1.S.I YYS.3.50.300.15.2.S.M YYS.3.50.300.15.3.M.G YYS.3.50.300.15.5.S.P
nova 050 10x10	SATINOX MIRROR GOLD	YYS.1.50.050.10.1.S.I YYS.1.50.050.10.2.S.M YYS.1.50.050.10.3.M.G	YYS.3.50.050.10.1.S.I YYS.3.50.050.10.2.S.M YYS.3.50.050.10.3.M.G
nova 050 15x15	SATINOX MIRROR GOLD	YYS.1.50.050.15.1.S.I YYS.1.50.050.15.2.S.M YYS.1.50.050.15.3.M.G	YYS.3.50.050.15.1.S.I YYS.3.50.050.15.2.S.M YYS.3.50.050.15.3.M.G
nova 050 ø13,5	SATINOX MIRROR GOLD	YYS.1.50.050.135.1.S.I YYS.1.50.050.135.2.S.M YYS.1.50.050.135.3.M.G	YYS.3.50.050.135.1.S.I YYS.3.50.050.135.2.S.M YYS.3.50.050.135.3.M.G
nova 050 20x20x28	SATINOX MIRROR GOLD	YYS.1.50.050.28.20.1.S.I YYS.1.50.050.28.20.2.S.M YYS.1.50.050.28.20.3.M.G	YYS.3.50.050.28.20.1.S.I YYS.3.50.050.28.20.2.S.M YYS.3.50.050.28.20.3.M.G
aqua 080 10x10	SATINOX MIRROR GOLD	YYS.1.50.080.10.1.S.I YYS.1.50.080.10.2.S.M YYS.1.50.080.10.3.M.G	YYS.3.50.080.10.1.S.I YYS.3.50.080.10.2.S.M YYS.3.50.080.10.3.M.G
aqua 080 15x15	SATINOX MIRROR GOLD SHINE	YYS.1.50.080.15.1.S.I YYS.1.50.080.15.2.S.M YYS.1.50.080.15.3.M.G	YYS.3.50.080.15.1.S.I YYS.3.50.080.15.2.S.M YYS.3.50.080.15.3.M.G
aqua 080 20x20x28	SATINOX MIRROR GOLD SHINE	YYS.1.50.080.28.20.1.S.I YYS.1.50.080.28.20.2.S.M YYS.1.50.080.28.20.3.M.G	YYS.3.50.080.28.20.1.S.I YYS.3.50.080.28.20.2.S.M YYS.3.50.080.28.20.3.M.G
natura 090 15x15	Compatible with your own covering meterial	YYS.1.50.090.15.1.S.I	YYS.3.50.090.15.1.S.I
natura 090 ø13,5	Compatible with your own covering meterial	YYS.1.50.090.135.1.S.I	YYS.3.50.090.135.1.S.I
y.8099 110 mm	Extension Part	Y. 8099	

Optional odor preventing sphere — Y.8123

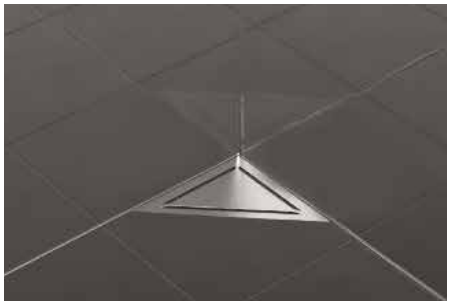

(massive cover 3 mm)

Precise adjustable in all directions patented eccentric strainerhead

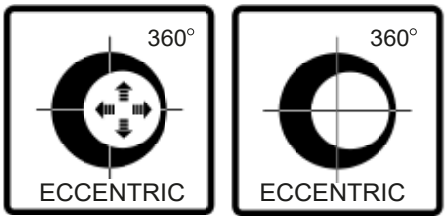

Technical drawing

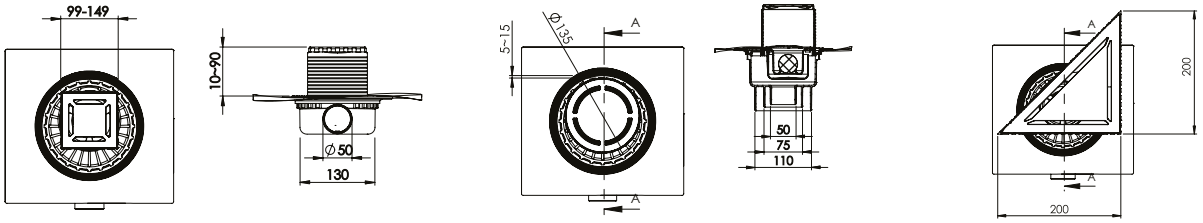

EN 50 - 70 and 100 mm connection, one siphon

KYS Series (Complete Set Plastic Frame)

Odor preventing, stainless grid classical floor drains

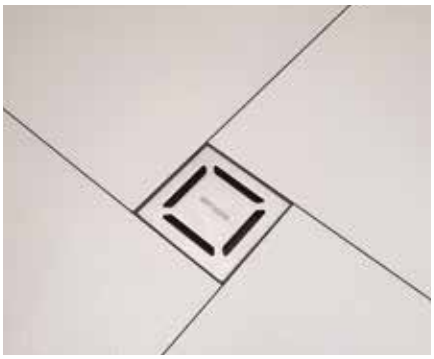

KYS.1.080

KYS.1.300

KYS.3.050

unica 300

aqua 080

nova 050

natura 090

dimension (cm)	surface	side outlet 50 mm	side outlet 32 mm	vertical outlet 50/70 mm
nova 050 10x10	SATINOX MIRROR GOLD	KYS.1.50.050.10.1.S.I KYS.1.50.050.10.2.S.M KYS.1.50.050.10.3.M.G	KYS.1.32.050.10.1.S.I KYS.1.32.050.10.2.S.M KYS.1.32.050.10.3.M.G	KYS.3.50.050.10.1.S.I KYS.3.50.050.10.2.S.M KYS.3.50.050.10.3.M.G
nova 050 15x15	SATINOX MIRROR GOLD	KYS.1.50.050.15.1.S.I KYS.1.50.050.15.2.S.M KYS.1.50.050.15.3.M.G	KYS.1.32.050.15.1.S.I KYS.1.32.050.15.2.S.M KYS.1.32.050.15.3.M.G	KYS.3.50.050.15.1.S.I KYS.3.50.050.15.2.S.M KYS.3.50.050.15.3.M.G
aqua 080 10x10	SATINOX MIRROR GOLD	KYS.1.50.080.10.1.S.I KYS.1.50.080.10.2.S.M KYS.1.50.080.10.3.M.G	KYS.1.32.080.10.1.S.I KYS.1.32.080.10.2.S.M KYS.1.32.080.10.3.M.G	KYS.3.50.080.10.1.S.I KYS.3.50.080.10.2.S.M KYS.3.50.080.10.3.M.G
aqua 080 15x15	SATINOX MIRROR GOLD	KYS.1.50.080.15.1.S.I KYS.1.50.080.15.2.S.M KYS.1.50.080.15.3.M.G	KYS.1.32.080.15.1.S.I KYS.1.32.080.15.2.S.M KYS.1.32.080.15.3.M.G	KYS.3.50.080.15.1.S.I KYS.3.50.080.15.2.S.M KYS.3.50.080.15.3.M.G
unica 300 10x10	SATINOX MIRROR GOLD SHINE	KYS.1.50.300.10.1.S.I KYS.1.50.300.10.2.S.M KYS.1.50.300.10.3.M.G KYS.1.50.300.10.5.S.P	KYS.1.32.300.10.1.S.I KYS.1.32.300.10.2.S.M KYS.1.32.300.10.3.M.G KYS.1.32.300.10.5.S.P	KYS.3.50.300.10.1.S.I KYS.3.50.300.10.2.S.M KYS.3.50.300.10.3.M.G KYS.3.50.300.10.5.S.P
unica 300 15x15	SATINOX MIRROR GOLD SHINE	KYS.1.50.300.15.1.S.I KYS.1.50.300.15.2.S.M KYS.1.50.300.15.3.M.G KYS.1.50.300.15.5.S.P	KYS.1.32.300.15.1.S.I KYS.1.32.300.15.2.S.M KYS.1.32.300.15.3.M.G KYS.1.32.300.15.5.S.P	KYS.3.50.300.15.1.S.I KYS.3.50.300.15.2.S.M KYS.3.50.300.15.3.M.G KYS.3.50.300.15.5.S.P
natura 090 15x15	Compatible with your own covering meterial	KYS.1.50.090.15.1.S.I	KYS.1.32.090.15.1.S.I	KYS.3.50.090.15.1.S.I

Optional odor preventing sphere Y.8123

Technical drawing







DKS Series

Stainless Steel Cover and ultra slim Frame

Stainless Steel (304) covers have an impressive look.
Color options will have an integrity with spaces
in your projects.

Odorless

You will never face odor problem
which is the most important problem
of most floor drains.

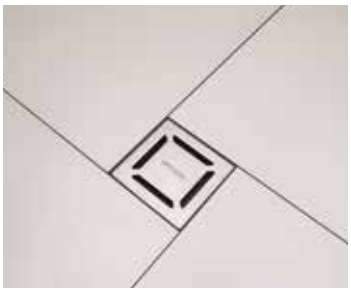

10x10

15x15

Covers

Unica (0,8 mm)	Nova (3 mm)	Greka (3 mm)	Aqua (3 mm)
10x10 KS.300.10.1.S.I **15x15** KS.300.15.1.S.I	**10x10** KS.050.10.1.S.I **15x15** KS.050.15.1.S.I	**10x10** KS.060.10.1.S.I **15x15** KS.060.15.1.S.I	**10x10** KS.080.10.1.S.I **15x15** KS.080.15.1.S.I

Frame

Ultra Slim Inox frame (Compatible all pipe diameters from 40 mm to 50 mm + 100 mm)

10x10

Ø 40 mm - H.8168.18.10
Ø 50 mm - H.8168.17.10

15x15



Ø 40 mm - H.8168.18.15
Ø 50 mm - H.8168.17.15

Ultra Slim Inox frame (Compatible all pipe diameters from 90 mm to 110 mm)

10x10

H.8168.22.10

15x15

H.8168.22.15

Outlet

(Adjustable gasket suitable
for all pipes 100 to 110 mm)

Y.8172
(40 to 45 mm)

Y.8176
(40 to 50 mm)

Y.8134
(50 to 100 mm)

Y.8161

Optional

Y.8183
(40 mm)

Odor parts

Y.8181 Membran
Waterless Odor Trap
40 mm

Y.8155 membran
Waterless Odor trap

Y.8163.50
(Watery odor trap 50 mm)

Y.8163.30
(Watery odor trap 30 mm)

Y.8174 (Checkvalves)
Waterless Odor trap

DKS N Series

Fully Harmony With Ceramics and Marble

Nova cover with its metallic look can be flipped horizontally and turned into NATURA cover plate. You may apply your choice of covering material inside while continuing to maintain integrity and elegancy in your bathroom.

Odourless

You will never face odour problem which is the most important problem of most floor drains.





Covers

12 mm	**10x10** K.091.10 **15x15** K.091.15	
22 mm		**10x10** K.092.10 **15x15** K.092.15

STAINLESS STEEL ★ 304 GRADE PREMIUM QUALTY

Frame

Ultra Slim Inox frame (Compatible all pipe diameters from 40 mm to 50 mm + 100 mm)

15x15

12 mm Ø 40 mm - H.8171.18.15
Ø 50 mm - H.8171.17.15
22 mm Ø 40 mm - H.8170.18.15
Ø 50 mm - H.8170.17.15

10x10

12 mm Ø 40 mm - H.8171.18.10
Ø 50 mm - H.8171.17.10
22 mm Ø 40 mm - H.8170.18.10
Ø 50 mm - H.8170.17.10

Ultra Slim Inox frame (Compatible all pipe diameters from 90 mm to 110 mm)

15x15

22 mm 15x15 - H.8170.22.15
12 mm 15x15 - H.8171.22.15

Outlet

(Adjustable gasket suitable for all pipes 100 to 110 mm)

Y.8172
(40 to 45 mm)

Y.8176
(40 to 50 mm)

Y.8134
(50 to 100 mm)

Y.8161

Optional

Y.8183
(40 mm)

Odor parts

Y.8181 Membran
Waterless Odor trap
40 mm

Y.8155 membran
Waterless Odor trap

Y.8163.50
(Watery odor trap 50 mm)

Y.8163.30
(Watery odor trap 30 mm)

Y.8174 (Checkvalves)
Waterless Odor trap

DKS Y Series

Stainless Steel Cover and ultra slim Frame

Stainless Steel (304) covers have an impressive look.
Color options will have an integrity with spaces
in your projects.

Odourless

You will never face odour problem
which is the most important problem
of most floor drains.

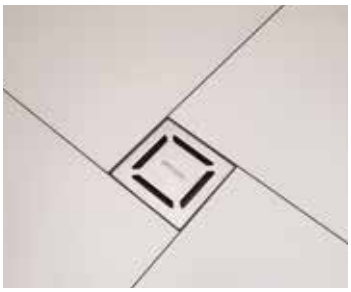

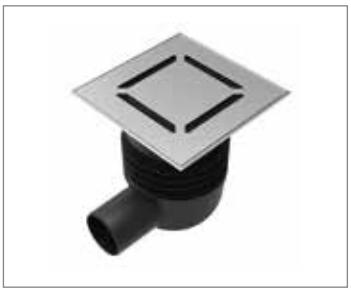

Covers

Unica (0,8 mm)	Nova (3 mm)	Greka (3 mm)	Aqua (3 mm)
10x10 KS.300.10.1.S.I **15x15** KS.300.15.1.S.I	**10x10** KS.050.10.1.S.I **15x15** KS.050.15.1.S.I	**10x10** KS.060.10.1.S.I **15x15** KS.060.15.1.S.I	**10x10** KS.080.10.1.S.I **15x15** KS.080.15.1.S.I

Frame

Ultra Slim Stainless Steel Frame

10x10

H.8168.22.10

15x15

H.8168.22.15

outlet

(Adjustable gasket suitable
for all pipes 100 to 110 mm)

Y.8161

odor parts

(available for 100 and 110 mm)

Y.8155 membran
Waterless Odor trap

Y.8163.50
(Watery odor trap 50 mm)

Y.8163.30
(Watery odor trap 30 mm)

Y.8174 (Checkvalves)
Waterless Odor trap

Y.8067.50 (50 mm side outlet)
Y.8067.32 (32 mm side outlet)

Y.8072.50
(50-70 mm vertical outlet)

Gama Clean Out & Floor Drain

Floor Drain

15x15 CKS.100.210.15.1.S.I

Technical Drawing

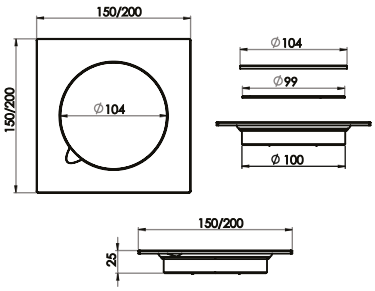

Clean Out

15x15 CKS.100.220.15.1.S.I

Technical Drawing

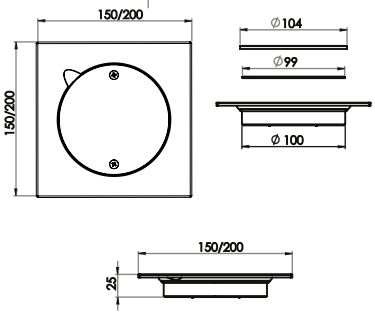

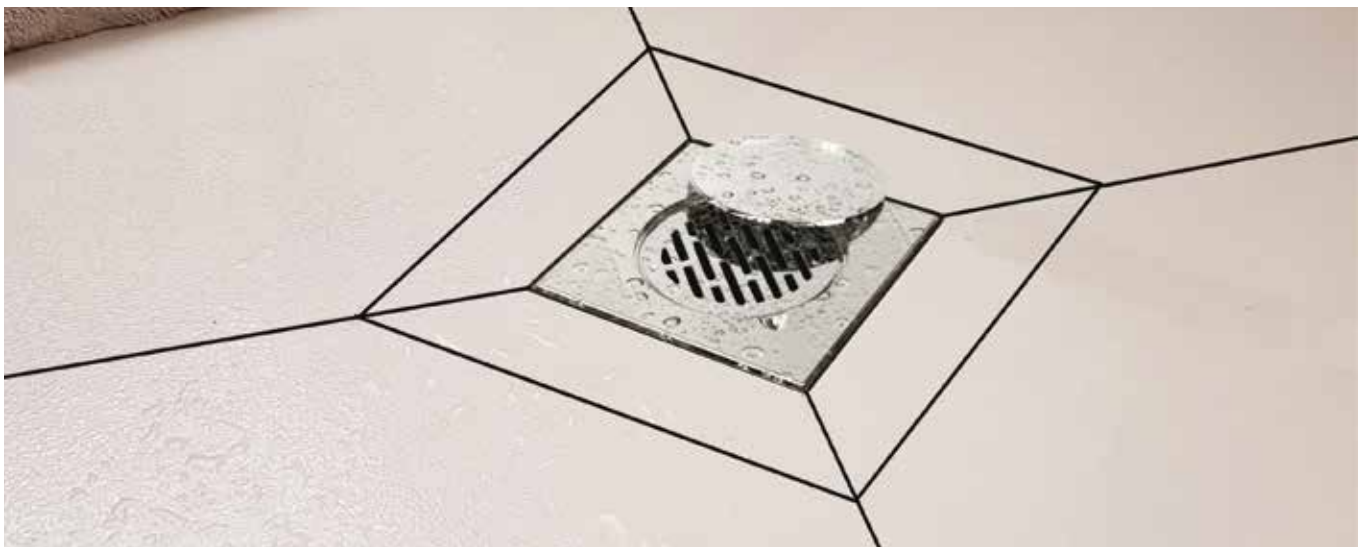

SDS D Series

Stainless Steel Cover and ultra slim Frame

Stainless Steel (304) covers have an impressive look.
Color options will have an integrity with spaces
in your projects.

Odorless

You will never face odor problem
which is the most important problem
of most floor drains.

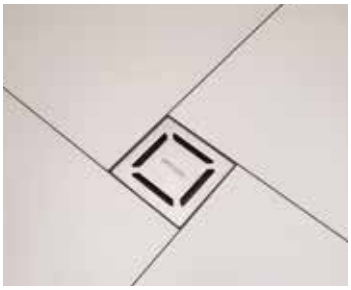

10x10

15x15

Covers

Unica (0,8 mm)	Nova (3 mm)	Greka (3 mm)	Aqua (3 mm)
10x10 KS.300.10.1.S.I **15x15** KS.300.15.1.S.I	**10x10** KS.050.10.1.S.I **15x15** KS.050.15.1.S.I	**10x10** KS.060.10.1.S.I **15x15** KS.060.15.1.S.I	**10x10** KS.080.10.1.S.I **15x15** KS.080.15.1.S.I

Frame

Ultra Slim Stainless Steel En 100 (4˝) Frame

10x10

H.8168.22.10

15x15

H.8168.22.15

outlet

(Adjustable gasket suitable
for all pipes 100 to 110 mm)

Y.8161

odor parts

(available for 100 and 110 mm)

Y.8155 membran
Waterless Odor trap

SDS. 8082 Side outlet H:60 mm

Odourless S type
trap 42 l/min

SDS. 8081 Side outlet H:80 mm

Odourless S type
trap 60 l/min

SDS. 8086 Vertical outlet H:50 mm

Odourless S type
trap 84 l/min

SDS. 8130 Vertical outlet H:50 mm

No s type
trap 66 l/min

SDS. 8135 Side outlet H:75 mm

No s type
trap 66 l/min

YYS D Series

Stainless Steel Cover and ultra slim Frame

Stainless Steel (304) covers have an impressive look.
Color options will have an integrity with spaces
in your projects.

Odorless

You will never face odor problem
which is the most important problem
of most floor drains.

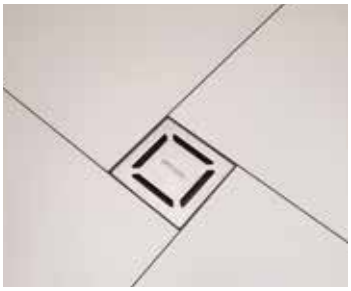

10x10



15x15



Covers

Unica (0,8 mm)	Nova (3 mm)	Greka (3 mm)	Aqua (3 mm)
10x10 KS.300.10.1.S.I **15x15** KS.300.15.1.S.I	**10x10** KS.050.10.1.S.I **15x15** KS.050.15.1.S.I	**10x10** KS.060.10.1.S.I **15x15** KS.060.15.1.S.I	**10x10** KS.080.10.1.S.I **15x15** KS.080.15.1.S.I

Frame

Ultra Slim Stainless Steel Frame

10x10 - H.8168.22.10

15x15 - H.8168.22.15

outlet

(Adjustable gasket suitable
for all pipes 100 to 110 mm)

Y.8161

odor parts

(available for 100 and 110 mm)

Y.8155 membran
Waterless Odor trap

Y.8163.50
(Watery odor trap 50 mm)

Y.8163.30
(Watery odor trap 30 mm)

Y.8174 (Checkvalves)
Waterless Odor trap



Vertical outlet
50 - 70 - 100

Y.8066



Side outlet
50

Y.8065

It is now very easy to furnish ceramic and other coating materials with Evimetal profiles that are easy to install. Perfect finishes are guaranteed.

Technical Profiles

Corner Shelf

Evimetal Lumia Series Corner Shelf is a stainless steel wall storage system that can be produced on Satin, Super Mirror, Gold, Bronze and Black surfaces. Besides its simple and stylish modern metallic appearance, it is suitable for use in showers and other tile wall applications with your own coating.

External Corner Shelf

21x12 **Technical Drawing**

E.210.120.1.S.I

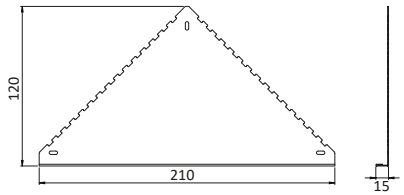

29x15 **Technical Drawing**

E.290.150.1.S.I

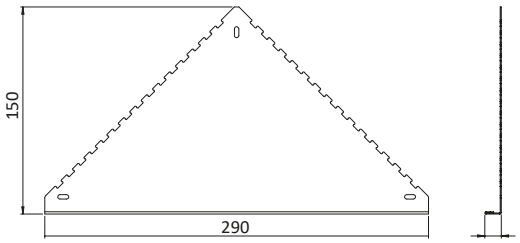

Evimetal technical profiles

Evimetal technical profiles offer many solutions in using ceramic and other coating options. Their functionalities and special designs lead to ideal combinations in showering areas. Evimetal Profiles are said to be the masterstroke for new constructions and renovation projects with its wide product range, different colour options and compatible sizes of different widths

Different use areas

Evimetal Profiles offer many combinations thanks to its functionalities and unique designs. Many users' needs are highly satisfied: i.e. interface transition of coating materials, corner finishes, wall- floor-stair complements, floor-mounted glass profiles, etc.

Perfect finishes

It is now very easy to furnish ceramic and other coating materials with Evimetal profiles that are easy to install. Perfect finishes are guaranteed. You can easily use Evimetal Profiles and have a nice looking showering area while increasing durability of your furnishings.

Stainless steel material

Evimetal Profiles are produced using first quality stainless steel (304) material. Special Protective films on the products are applied for the safety of the profiles during installation process.

Highly Protective

Wall-corner Profiles protect products edges very safely. Evimetal Profiles play important role for solid and beautiful furnishings. Also shielding ceramic coatings protectively.

Limitless imagination

Based on your needs you can use the appropriate shower profiles and end up with beautiful views of bathrooms. You can play with the image of your rooms with what Evimetal offers you: inclined cut ceramic tiles, double-use, multiple-use, internal/ external corner transitions, baseboard Profiles,etc.

Colour alternatives fit for your projects

Evimetal Profiles can be produced in 9 different coating alternatives. Production based on your special needs is also possible. You may refer to sales consultant in case of any questions about project solutions and technical questions. On gold, bronze and black surfaces titanium PVD coating is applied. The protective film on the surfaces of the products should not be removed until the installation is completed. Materials including chemical compounds should not be used while cleaning and utilizing.
The surface alternatives for 244 cm Profiles: super mirror, gold mirror, bronze mirror and black mirror. The surface alternatives for 250 cm Profiles: Satin finish and glossy. If requested the Profiles can be produced to max. 300 cm.

	Satine	1.S.I
	Super mirror	2.S.M
	Mirror gold	3.M.G
	Satine gold	4.S.G
	Shine	5.S.P
	Mirror Bronze	6.M.B
	Satine Bronze	7.S.B
	Mirror Antrachite	8.M.A
	Satine Antrachite	9.S.A

There may be differ with between the colors specified in the catalog and the products color because of color covering technique.

glaze

PRF 710 Glass profile below covering material

PRF 711 Glass profile above covering material

NEW

PRF 710

NEW

PRF 711

	Dimension	Surface	Code
PRF 710 13 MM	8 MM	SATINOX	PRF.710.13.8.2500.1.S.I
		SHINE	PRF.710.13.8.2500.5.S.P
	10 MM	SATINOX	PRF.710.13.10.2500.1.S.I
		SHINE	PRF.710.13.10.2500.5.S.P
	12 MM	SATINOX	PRF.710.13.12.2500.1.S.I
		SHINE	PRF.710.13.12.2500.5.S.P
PRF 711 13 MM	13 MM	SATINOX	PRF.711.13.2500.1.S.I
		SHINE	PRF.711.13.2500.5.S.P

Technical information

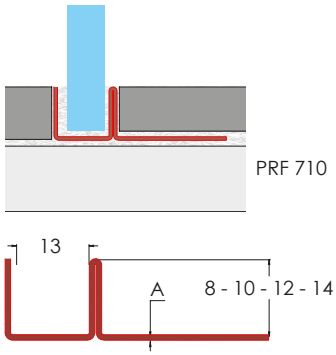

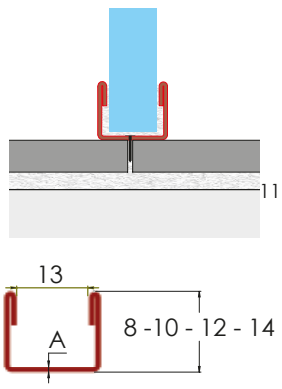

Can be produced in different sizes according to your needs.

ler

PRF 100

L shape outer edge profile

Dimension	Surface	Inox / Code	Aluminium / Code
6 mm	SATINOX	PRF.100.6.2500.1.S.I	PRF.106.6.2500.1.S.I
	SUPER MIRROR	PRF.100.6.2440.2.S.M	PRF.106.6.2440.2.S.M
	MIRROR GOLD	PRF.100.6.2440.3.M.G	PRF.106.6.2440.3.M.G
	SATINE GOLD	PRF.100.6.2440.4.S.G	PRF.106.6.2440.4.S.G
	SHINE	PRF.100.6.2500.5.S.P	PRF.106.6.2500.5.S.P
	MIRROR BRONZE	PRF.100.6.2440.6.M.B	PRF.106.6.2440.6.M.B
	SATINE BRONZE	PRF.100.6.2440.7.S.B	PRF.106.6.2440.7.S.B
	MIRROR ANTHRACITE	PRF.100.6.2440.8.M.A	PRF.106.6.2440.8.M.A
	SATINE ANTHRACITE	PRF.100.6.2440.9.S.A	PRF.106.6.2440.9.S.A
8 mm	SATINOX	PRF.100.8.2500.1.S.I	PRF.106.8.2500.1.S.I
	SUPER MIRROR	PRF.100.8.2440.2.S.M	PRF.106.8.2440.2.S.M
	MIRROR GOLD	PRF.100.8.2440.3.M.G	PRF.106.8.2440.3.M.G
	SATINE GOLD	PRF.100.8.2440.4.S.G	PRF.106.8.2440.4.S.G
	SHINE	PRF.100.8.2500.5.S.P	PRF.106.8.2500.5.S.P
	MIRROR BRONZE	PRF.100.8.2440.6.M.B	PRF.106.8.2440.6.M.B
	SATINE BRONZE	PRF.100.8.2440.7.S.B	PRF.106.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.100.8.2440.8.M.A	PRF.106.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.100.8.2440.9.S.A	PRF.106.8.2440.9.S.A
10 mm	SATINOX	PRF.100.10.2500.1.S.I	PRF.106.10.2500.1.S.I
	SUPER MIRROR	PRF.100.10.2440.2.S.M	PRF.106.10.2440.2.S.M
	MIRROR GOLD	PRF.100.10.2440.3.M.G	PRF.106.10.2440.3.M.G
	SATINE GOLD	PRF.100.10.2440.4.S.G	PRF.106.10.2440.4.S.G
	SHINE	PRF.100.10.2500.5.S.P	PRF.106.10.2500.5.S.P
	MIRROR BRONZE	PRF.100.10.2440.6.M.B	PRF.106.10.2440.6.M.B
	SATINE BRONZE	PRF.100.10.2440.7.S.B	PRF.106.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.100.10.2440.8.M.A	PRF.106.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.100.10.2440.9.S.A	PRF.106.10.2440.9.S.A
12 mm	SATINOX	PRF.100.12.2500.1.S.I	PRF.106.12.2500.1.S.I
	SUPER MIRROR	PRF.100.12.2440.2.S.M	PRF.106.12.2440.2.S.M
	MIRROR GOLD	PRF.100.12.2440.3.M.G	PRF.106.12.2440.3.M.G
	SATINE GOLD	PRF.100.12.2440.4.S.G	PRF.106.12.2440.4.S.G
	SHINE	PRF.100.12.2500.5.S.P	PRF.106.12.2500.5.S.P
	MIRROR BRONZE	PRF.100.12.2440.6.M.B	PRF.106.12.2440.6.M.B
	SATINE BRONZE	PRF.100.12.2440.7.S.B	PRF.106.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.100.12.2440.8.M.A	PRF.106.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.100.12.2440.9.S.A	PRF.106.12.2440.9.S.A
14 mm	SATINOX	PRF.100.14.2500.1.S.I	PRF.106.14.2500.1.S.I
	SUPER MIRROR	PRF.100.14.2440.2.S.M	PRF.106.14.2440.2.S.M
	MIRROR GOLD	PRF.100.14.2440.3.M.G	PRF.106.14.2440.3.M.G
	SATINE GOLD	PRF.100.14.2440.4.S.G	PRF.106.14.2440.4.S.G
	SHINE	PRF.100.14.2500.5.S.P	PRF.106.14.2500.5.S.P
	MIRROR BRONZE	PRF.100.14.2440.6.M.B	PRF.106.14.2440.6.M.B
	SATINE BRONZE	PRF.100.14.2440.7.S.B	PRF.106.14.2440.7.S.B
	MIRROR ANTHRACITE	PRF.100.14.2440.8.M.A	PRF.106.14.2440.8.M.A
	SATINE ANTHRACITE	PRF.100.14.2440.9.S.A	PRF.106.14.2440.9.S.A

Technical information

PRF.100



PRF.106



Can be produced in different sizes according to your needs.

fez

PRF 500

Round edge protection profile

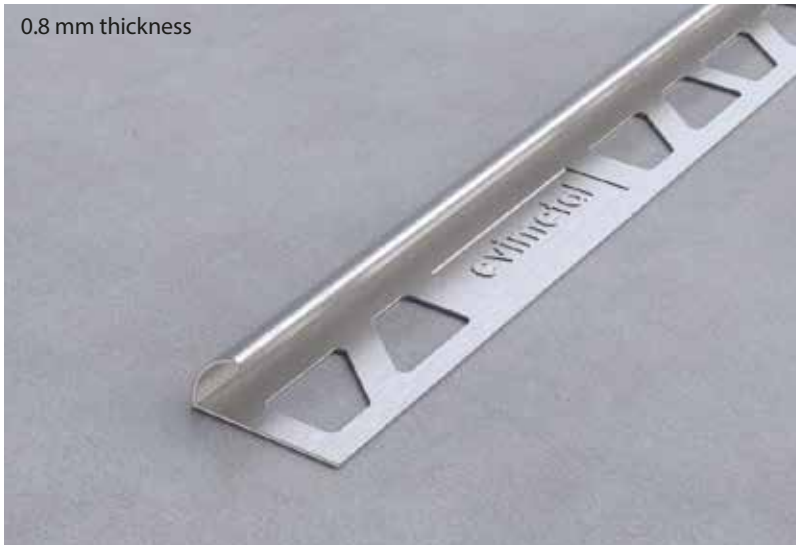

Dimension	Surface	Inox / Code	Aluminium / Code
8 mm	SATINOX	PRF.500.8.2500.1.S.I	PRF.506.8.2500.1.S.I
	SUPER MIRROR	PRF.500.8.2440.2.S.M	PRF.506.8.2440.2.S.M
	MIRROR GOLD	PRF.500.8.2440.3.M.G	PRF.506.8.2440.3.M.G
	SATINE GOLD	PRF.500.8.2440.4.S.G	PRF.506.8.2440.4.S.G
	SHINE	PRF.500.8.2500.5.S.P	PRF.506.8.2500.5.S.P
	MIRROR BRONZE	PRF.500.8.2440.6.M.B	PRF.506.8.2440.6.M.B
	SATINE BRONZE	PRF.500.8.2440.7.S.B	PRF.506.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.500.8.2440.8.M.A	PRF.506.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.500.8.2440.9.S.A	PRF.506.8.2440.9.S.A
10 mm	SATINOX	PRF.500.10.2500.1.S.I	PRF.506.10.2500.1.S.I
	SUPER MIRROR	PRF.500.10.2440.2.S.M	PRF.506.10.2440.2.S.M
	MIRROR GOLD	PRF.500.10.2440.3.M.G	PRF.506.10.2440.3.M.G
	SATINE GOLD	PRF.500.10.2440.4.S.G	PRF.506.10.2440.4.S.G
	SHINE	PRF.500.10.2500.5.S.P	PRF.506.10.2500.5.S.P
	MIRROR BRONZE	PRF.500.10.2440.6.M.B	PRF.506.10.2440.6.M.B
	SATINE BRONZE	PRF.500.10.2440.7.S.B	PRF.506.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.500.10.2440.8.M.A	PRF.506.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.500.10.2440.9.S.A	PRF.506.10.2440.9.S.A
12 mm	SATINOX	PRF.500.12.2500.1.S.I	PRF.506.12.2500.1.S.I
	SUPER MIRROR	PRF.500.12.2440.2.S.M	PRF.506.12.2440.2.S.M
	MIRROR GOLD	PRF.500.12.2440.3.M.G	PRF.506.12.2440.3.M.G
	SATINE GOLD	PRF.500.12.2440.4.S.G	PRF.506.12.2440.4.S.G
	SHINE	PRF.500.12.2500.5.S.P	PRF.506.12.2500.5.S.P
	MIRROR BRONZE	PRF.500.12.2440.6.M.B	PRF.506.12.2440.6.M.B
	SATINE BRONZE	PRF.500.12.2440.7.S.B	PRF.506.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.500.12.2440.8.M.A	PRF.506.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.500.12.2440.9.S.A	PRF.506.12.2440.9.S.A
14 mm	SATINOX	PRF.500.14.2500.1.S.I	PRF.506.14.2500.1.S.I
	SUPER MIRROR	PRF.500.14.2440.2.S.M	PRF.506.14.2440.2.S.M
	MIRROR GOLD	PRF.500.14.2440.3.M.G	PRF.506.14.2440.3.M.G
	SATINE GOLD	PRF.500.14.2440.4.S.G	PRF.506.14.2440.4.S.G
	SHINE	PRF.500.14.2500.5.S.P	PRF.506.14.2500.5.S.P
	MIRROR BRONZE	PRF.500.14.2440.6.M.B	PRF.506.14.2440.6.M.B
	SATINE BRONZE	PRF.500.14.2440.7.S.B	PRF.506.14.2440.7.S.B
	MIRROR ANTHRACITE	PRF.500.14.2440.8.M.A	PRF.506.14.2440.8.M.A
	SATINE ANTHRACITE	PRF.500.14.2440.9.S.A	PRF.506.14.2440.9.S.A

Technical information

PRF.500



PRF.506



Can be produced in different sizes according to your needs.

Köşe bitiş

F.501 F.502

Stainless steel surface

SATINOX
S.MIRROR
M. GOLD

vera

PRF 400 Square corner edge protection profile

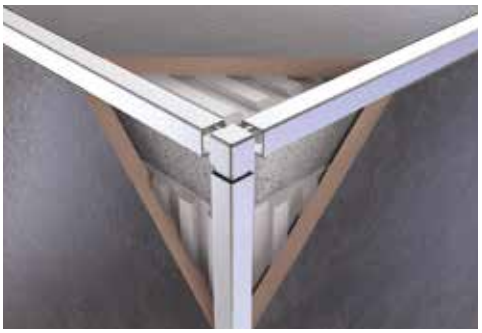
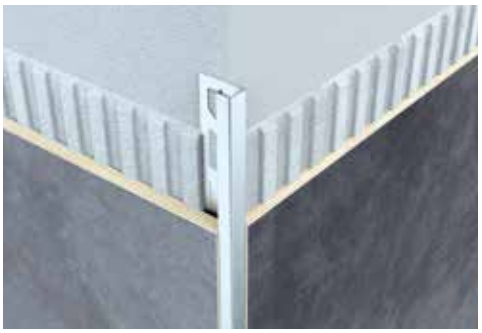
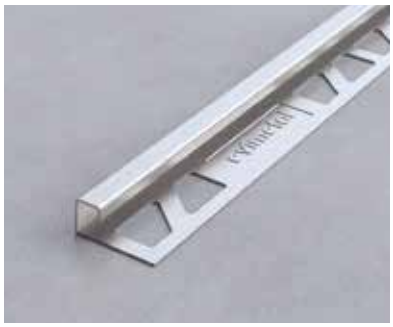

Dimension	Surface	Inox / Code	Aluminium / Code
6 mm	SATINOX	PRF.400.6.2500.1.S.I	PRF.406.6.2500.1.S.I
	SUPER MIRROR	PRF.400.6.2440.2.S.M	PRF.406.6.2440.2.S.M
	MIRROR GOLD	PRF.400.6.2440.3.M.G	PRF.406.6.2440.3.M.G
	SATINE GOLD	PRF.400.6.2440.4.S.G	PRF.406.6.2440.4.S.G
	SHINE	PRF.400.6.2500.5.S.P	PRF.406.6.2500.5.S.P
	MIRROR BRONZE	PRF.400.6.2440.6.M.B	PRF.406.6.2440.6.M.B
	SATINE BRONZE	PRF.400.6.2440.7.S.B	PRF.406.6.2440.7.S.B
	MIRROR ANTHRACITE	PRF.400.6.2440.8.M.A	PRF.406.6.2440.8.M.A
	SATINE ANTHRACITE	PRF.400.6.2440.9.S.A	PRF.406.6.2440.9.S.A
8 mm	SATINOX	PRF.400.8.2500.1.S.I	PRF.406.8.2500.1.S.I
	SUPER MIRROR	PRF.400.8.2440.2.S.M	PRF.406.8.2440.2.S.M
	MIRROR GOLD	PRF.400.8.2440.3.M.G	PRF.406.8.2440.3.M.G
	SATINE GOLD	PRF.400.8.2440.4.S.G	PRF.406.8.2440.4.S.G
	SHINE	PRF.400.8.2500.5.S.P	PRF.406.8.2500.5.S.P
	MIRROR BRONZE	PRF.400.8.2440.6.M.B	PRF.406.8.2440.6.M.B
	SATINE BRONZE	PRF.400.8.2440.7.S.B	PRF.406.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.400.8.2440.8.M.A	PRF.406.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.400.8.2440.9.S.A	PRF.406.8.2440.9.S.A
10 mm	SATINOX	PRF.400.10.2500.1.S.I	PRF.406.10.2500.1.S.I
	SUPER MIRROR	PRF.400.10.2440.2.S.M	PRF.406.10.2440.2.S.M
	MIRROR GOLD	PRF.400.10.2440.3.M.G	PRF.406.10.2440.3.M.G
	SATINE GOLD	PRF.400.10.2440.4.S.G	PRF.406.10.2440.4.S.G
	SHINE	PRF.400.10.2500.5.S.P	PRF.406.10.2500.5.S.P
	MIRROR BRONZE	PRF.400.10.2440.6.M.B	PRF.406.10.2440.6.M.B
	SATINE BRONZE	PRF.400.10.2440.7.S.B	PRF.406.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.400.10.2440.8.M.A	PRF.406.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.400.10.2440.9.S.A	PRF.406.10.2440.9.S.A
12 mm	SATINOX	PRF.400.12.2500.1.S.I	PRF.406.12.2500.1.S.I
	SUPER MIRROR	PRF.400.12.2440.2.S.M	PRF.406.12.2440.2.S.M
	MIRROR GOLD	PRF.400.12.2440.3.M.G	PRF.406.12.2440.3.M.G
	SATINE GOLD	PRF.400.12.2440.4.S.G	PRF.406.12.2440.4.S.G
	SHINE	PRF.400.12.2500.5.S.P	PRF.406.12.2500.5.S.P
	MIRROR BRONZE	PRF.400.12.2440.6.M.B	PRF.406.12.2440.6.M.B
	SATINE BRONZE	PRF.400.12.2440.7.S.B	PRF.406.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.400.12.2440.8.M.A	PRF.406.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.400.12.2440.9.S.A	PRF.406.12.2440.9.S.A
14 mm	SATINOX	PRF.400.14.2500.1.S.I	PRF.406.14.2500.1.S.I
	SUPER MIRROR	PRF.400.14.2440.2.S.M	PRF.406.14.2440.2.S.M
	MIRROR GOLD	PRF.400.14.2440.3.M.G	PRF.406.14.2440.3.M.G
	SATINE GOLD	PRF.400.14.2440.4.S.G	PRF.406.14.2440.4.S.G
	SHINE	PRF.400.14.2500.5.S.P	PRF.406.14.2500.5.S.P
	MIRROR BRONZE	PRF.400.14.2440.6.M.B	PRF.406.14.2440.6.M.B
	SATINE BRONZE	PRF.400.14.2440.7.S.B	PRF.406.14.2440.7.S.B
	MIRROR ANTHRACITE	PRF.400.14.2440.8.M.A	PRF.406.14.2440.8.M.A
	SATINE ANTHRACITE	PRF.400.14.2440.9.S.A	PRF.406.14.2440.9.S.A

Technical information

Can be produced in different sizes according to your needs.





corner finish

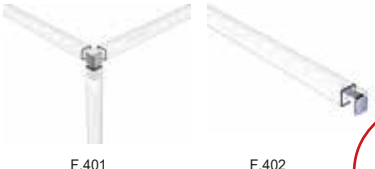

Stainless steel surface

SATINOX
S.MIRROR
M. GOLD

kot t

PRF 790 Transition profile
PRF 791 Transition profile under covering material

PRF 790

NEW

PRF 791

Dimension	Surface	Inox / Code	Aluminium / Code
PRF 790 15 MM	SATINOX	PRF.790.15.2500.1.S.I	PRF.796.11.2500.1.S.I
	SUPER MIRROR	PRF.790.15.2440.2.S.M	PRF.796.11.2440.2.S.M
	MIRROR GOLD	PRF.790.15.2440.3.M.G	PRF.796.11.2440.3.M.G
	SATINE GOLD	PRF.790.15.2440.4.S.G	PRF.796.11.2440.4.S.G
	SHINE	PRF.790.15.2500.5.S.P	PRF.796.11.2500.5.S.P
	MIRROR BRONZE	PRF.790.15.2440.6.M.B	PRF.796.11.2440.6.M.B
	SATINE BRONZE	PRF.790.15.2440.7.S.B	PRF.796.11.2440.7.S.B
	MIRROR ANTHRACITE	PRF.790.15.2440.8.M.A	PRF.796.11.2440.8.M.A
	SATINE ANTHRACITE	PRF.790.15.2440.9.S.A	PRF.796.11.2440.9.S.A
PRF 790 26 MM	SATINOX	PRF.790.26.2500.1.S.I	PRF.796.20.2500.1.S.I
	SUPER MIRROR	PRF.790.26.2440.2.S.M	PRF.796.20.2440.2.S.M
	MIRROR GOLD	PRF.790.26.2440.3.M.G	PRF.796.20.2440.3.M.G
	SATINE GOLD	PRF.790.26.2440.4.S.G	PRF.796.20.2440.4.S.G
	SHINE	PRF.790.26.2500.5.S.P	PRF.796.20.2500.5.S.P
	MIRROR BRONZE	PRF.790.26.2440.6.M.B	PRF.796.20.2440.6.M.B
	SATINE BRONZE	PRF.790.26.2440.7.S.B	PRF.796.20.2440.7.S.B
	MIRROR ANTHRACITE	PRF.790.26.2440.8.M.A	PRF.796.20.2440.8.M.A
	SATINE ANTHRACITE	PRF.790.26.2440.9.S.A	PRF.796.20.2440.9.S.A
PRF 791 10 MM	SATINOX	PRF.791.10.2500.1.S.I	
	SUPER MIRROR	PRF.791.10.2440.2.S.M	
	MIRROR GOLD	PRF.791.10.2440.3.M.G	
	SATINE GOLD	PRF.791.10.2440.4.S.G	
	SHINE	PRF.791.10.2500.5.S.P	
	MIRROR BRONZE	PRF.791.10.2440.6.M.B	
	SATINE BRONZE	PRF.791.10.2440.7.S.B	
	MIRROR ANTHRACITE	PRF.791.10.2440.8.M.A	
	SATINE ANTHRACITE	PRF.791.10.2440.9.S.A	
PRF 791 12 MM	SATINOX	PRF.791.12.2500.1.S.I	
	SUPER MIRROR	PRF.791.12.2440.2.S.M	
	MIRROR GOLD	PRF.791.12.2440.3.M.G	
	SATINE GOLD	PRF.791.12.2440.4.S.G	
	SHINE	PRF.791.12.2500.5.S.P	
	MIRROR BRONZE	PRF.791.12.2440.6.M.B	
	SATINE BRONZE	PRF.791.12.2440.7.S.B	
	MIRROR ANTHRACITE	PRF.791.12.2440.8.M.A	
	SATINE ANTHRACITE	PRF.791.12.2440.9.S.A	
PRF 791 14 MM	SATINOX	PRF.791.14.2500.1.S.I	
	SUPER MIRROR	PRF.791.14.2440.2.S.M	
	MIRROR GOLD	PRF.791.14.2440.3.M.G	
	SATINE GOLD	PRF.791.14.2440.4.S.G	
	SHINE	PRF.791.14.2500.5.S.P	
	MIRROR BRONZE	PRF.791.14.2440.6.M.B	
	SATINE BRONZE	PRF.791.14.2440.7.S.B	
	MIRROR ANTHRACITE	PRF.791.14.2440.8.M.A	
	SATINE ANTHRACITE	PRF.791.14.2440.9.S.A	

Technical information

PRF.790



PRF.791



Can be produced in different sizes according to your needs.

PRF.796

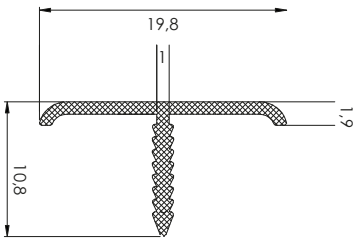



ler

PRF.110 L flexible outer edge ending profile

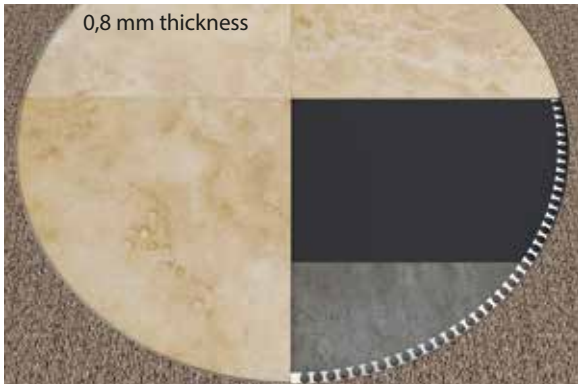

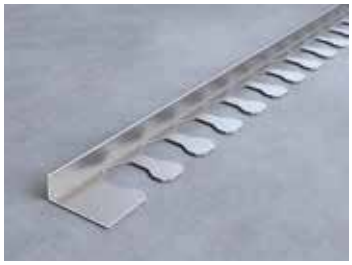

Dimension	Surface	Code
6 mm	SATINOX	PRF.110.6.2500.1.S.I
	SUPER MIRROR	PRF.110.6.2440.2.S.M
	MIRROR GOLD	PRF.110.6.2440.3.M.G
	SATINE GOLD	PRF.110.6.2440.4.S.G
	SHINE	PRF.110.6.2500.5.S.P
	MIRROR BRONZE	PRF.110.6.2440.6.M.B
	SATINE BRONZE	PRF.110.6.2440.7.S.B
	MIRROR ANTHRACITE	PRF.110.6.2440.8.M.A
	SATINE ANTHRACITE	PRF.110.6.2440.9.S.A
8 mm	SATINOX	PRF.110.8.2500.1.S.I
	SUPER MIRROR	PRF.110.8.2440.2.S.M
	MIRROR GOLD	PRF.110.8.2440.3.M.G
	SATINE GOLD	PRF.110.8.2440.4.S.G
	SHINE	PRF.110.8.2500.5.S.P
	MIRROR BRONZE	PRF.110.8.2440.6.M.B
	SATINE BRONZE	PRF.110.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.110.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.110.8.2440.9.S.A
10 mm	SATINOX	PRF.110.10.2500.1.S.I
	SUPER MIRROR	PRF.110.10.2440.2.S.M
	MIRROR GOLD	PRF.110.10.2440.3.M.G
	SATINE GOLD	PRF.110.10.2440.4.S.G
	SHINE	PRF.110.10.2500.5.S.P
	MIRROR BRONZE	PRF.110.10.2440.6.M.B
	SATINE BRONZE	PRF.110.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.110.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.110.10.2440.9.S.A
12 mm	SATINOX	PRF.110.12.2500.1.S.I
	SUPER MIRROR	PRF.110.12.2440.2.S.M
	MIRROR GOLD	PRF.110.12.2440.3.M.G
	SATINE GOLD	PRF.110.12.2440.4.S.G
	SHINE	PRF.110.12.2500.5.S.P
	MIRROR BRONZE	PRF.110.12.2440.6.M.B
	SATINE BRONZE	PRF.110.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.110.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.110.12.2440.9.S.A
14 mm	SATINOX	PRF.110.14.2500.1.S.I
	SUPER MIRROR	PRF.110.14.2440.2.S.M
	MIRROR GOLD	PRF.110.14.2440.3.M.G
	SATINE GOLD	PRF.110.14.2440.4.S.G
	SHINE	PRF.110.14.2500.5.S.P
	MIRROR BRONZE	PRF.110.14.2440.6.M.B
	SATINE BRONZE	PRF.110.14.2440.7.S.B
	MIRROR ANTHRACITE	PRF.110.14.2440.8.M.A
	SATINE ANTHRACITE	PRF.110.14.2440.9.S.A

Technical information



Can be produced in different sizes according to your needs.

ram

PRF 800
PRF 820

Inner corner edge profile

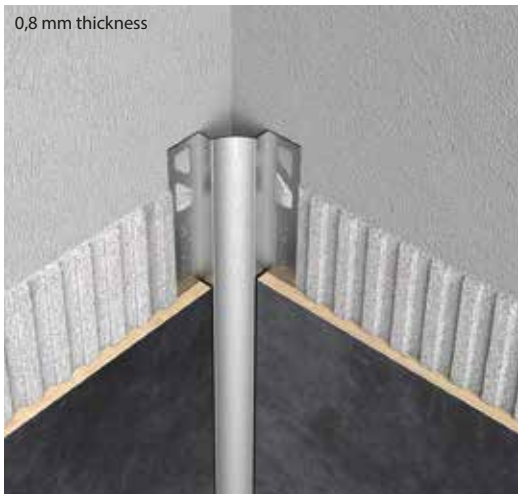

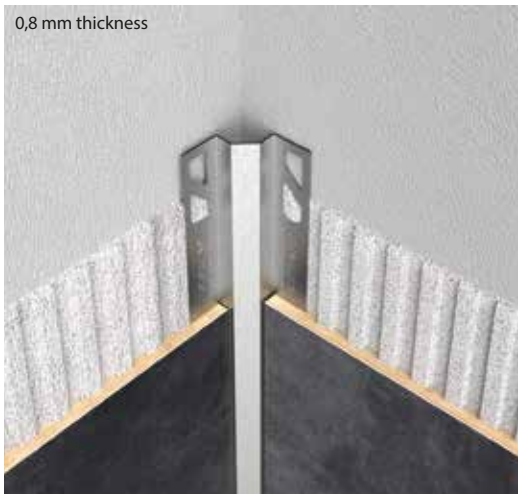



Dimension	Surface	Code
10 mm RAM-M	SATINOX	PRF.800.10.2500.1.S.I
	SUPER MIRROR	PRF.800.10.2440.2.S.M
	MIRROR GOLD	PRF.800.10.2440.3.M.G
	SATINE GOLD	PRF.800.10.2440.4.S.G
	SHINE	PRF.800.10.2500.5.S.P
	MIRROR BRONZE	PRF.800.10.2440.6.M.B
	SATINE BRONZE	PRF.800.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.800.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.800.10.2440.9.S.A
12 mm RAM-M	SATINOX	PRF.800.12.2500.1.S.I
	SUPER MIRROR	PRF.800.12.2440.2.S.M
	MIRROR GOLD	PRF.800.12.2440.3.M.G
	SATINE GOLD	PRF.800.12.2440.4.S.G
	SHINE	PRF.800.12.2500.5.S.P
	MIRROR BRONZE	PRF.800.12.2440.6.M.B
	SATINE BRONZE	PRF.800.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.800.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.800.12.2440.9.S.A
10 mm RAM-D	SATINOX	PRF.820.10.2500.1.S.I
	SUPER MIRROR	PRF.820.10.2440.2.S.M
	MIRROR GOLD	PRF.820.10.2440.3.M.G
	SATINE GOLD	PRF.820.10.2440.4.S.G
	SHINE	PRF.820.10.2500.5.S.P
	MIRROR BRONZE	PRF.820.10.2440.6.M.B
	SATINE BRONZE	PRF.820.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.820.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.820.10.2440.9.S.A
12 mm RAM-D	SATINOX	PRF.820.12.2500.1.S.I
	SUPER MIRROR	PRF.820.12.2440.2.S.M
	MIRROR GOLD	PRF.820.12.2440.3.M.G
	SATINE GOLD	PRF.820.12.2440.4.S.G
	SHINE	PRF.820.12.2500.5.S.P
	MIRROR BRONZE	PRF.820.12.2440.6.M.B
	SATINE BRONZE	PRF.820.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.820.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.820.12.2440.9.S.A

Technical information





PRF.800



PRF.820



Inner corner finishings

Prf.801

Prf.821

Prf.822

Prf.803

Stainless steel surface

SATINOX
S.MIRROR
M. GOLD

Prf.802

Can be produced in different sizes according to your needs.

ram

PRF 840
PRF 860

Inner corner edge profile

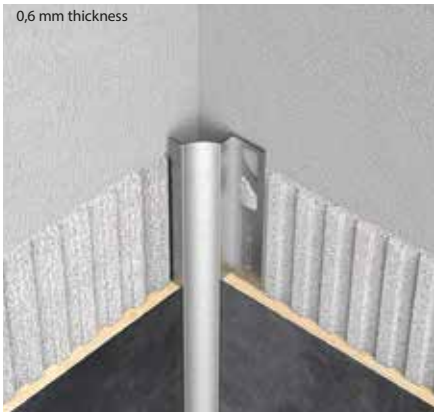

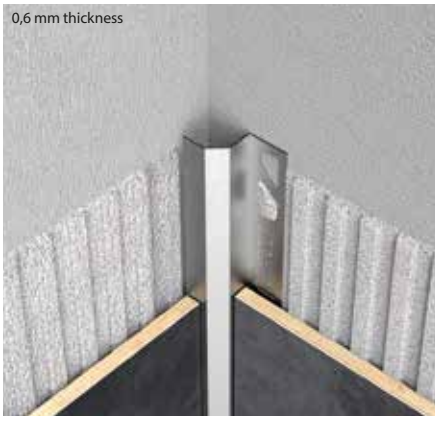



Dimension	Surface	Inox / Code	Aluminium / Code
10 mm RAM-MT	SATINOX	PRF.840.10.2500.1.S.I	PRF.846.10.2700.1.S.I
	SUPER MIRROR	PRF.840.10.2440.2.S.M	PRF.846.10.2700.2.S.M
	MIRROR GOLD	PRF.840.10.2440.3.M.G	PRF.846.10.2700.3.M.G
	SHINE	PRF.840.10.2500.5.S.P	PRF.846.10.2700.5.S.P
	MIRROR BRONZE	PRF.840.10.2440.6.M.B	PRF.846.10.2700.6.M.B
	SATINE ANTHRACITE	PRF.840.10.2440.8.M.A	PRF.846.10.2700.8.M.A
12 mm RAM-DT	SATINOX	PRF.840.12.2500.1.S.I	PRF.846.12.2700.1.S.I
	SUPER MIRROR	PRF.840.12.2440.2.S.M	PRF.846.12.2700.2.S.M
	MIRROR GOLD	PRF.840.12.2440.3.M.G	PRF.846.12.2700.3.M.G
	SHINE	PRF.840.12.2500.5.S.P	PRF.846.12.2700.5.S.P
	MIRROR BRONZE	PRF.840.12.2440.6.M.B	PRF.846.12.2700.6.M.B
	SATINE ANTHRACITE	PRF.840.12.2440.8.M.A	PRF.846.12.2700.8.M.A
10 mm RAM-DT	SATINOX	PRF.860.10.2500.1.S.I	
	SUPER MIRROR	PRF.860.10.2440.2.S.M	
	MIRROR GOLD	PRF.860.10.2440.3.M.G	
	SHINE	PRF.860.10.2500.5.S.P	
	MIRROR BRONZE	PRF.860.10.2440.6.M.B	
	SATINE ANTHRACITE	PRF.860.10.2440.8.M.A	
12 mm RAM-DT	SATINOX	PRF.860.12.2500.1.S.I	
	SUPER MIRROR	PRF.860.12.2440.2.S.M	
	MIRROR GOLD	PRF.860.12.2440.3.M.G	
	SHINE	PRF.860.12.2500.5.S.P	
	MIRROR BRONZE	PRF.860.12.2440.6.M.B	
	SATINE ANTHRACITE	PRF.860.12.2440.8.M.A	

Technical information





PRF.840



PRF.860



PRF.846



Can be produced in different sizes according to your needs.

decoline

B 902

Fuga profile

0,8 mm thickness

Dimension	Surface	Code
15 mm	SATINOX	B.902.15.2500.1.S.I
	SUPER MIRROR	B.902.15.2440.2.S.M
	MIRROR GOLD	B.902.15.2440.3.M.G
	SATINE GOLD	B.902.15.2440.4.S.G
	SHINE	B.902.15.2500.5.S.P
	MIRROR BRONZE	B.902.15.2440.6.M.B
	SATINE BRONZE	B.902.15.2440.7.S.B
	MIRROR ANTHRACITE	B.902.15.2440.8.M.A
	SATINE ANTHRACITE	B.902.15.2440.9.S.A
23 mm	SATINOX	B.902.23.2500.1.S.I
	SUPER MIRROR	B.902.23.2440.2.S.M
	MIRROR GOLD	B.902.23.2440.3.M.G
	SATINE GOLD	B.902.23.2440.4.S.G
	SHINE	B.902.23.2500.5.S.P
	MIRROR BRONZE	B.902.23.2440.6.M.B
	SATINE BRONZE	B.902.23.2440.7.S.B
	MIRROR ANTHRACITE	B.902.23.2440.8.M.A
	SATINE ANTHRACITE	B.902.23.2440.9.S.A
30 mm	SATINOX	B.902.30.2500.1.S.I
	SUPER MIRROR	B.902.30.2440.2.S.M
	MIRROR GOLD	B.902.30.2440.3.M.G
	SATINE GOLD	B.902.30.2440.4.S.G
	SHINE	B.902.30.2500.5.S.P
	MIRROR BRONZE	B.902.30.2440.6.M.B
	SATINE BRONZE	B.902.30.2440.7.S.B
	MIRROR ANTHRACITE	B.902.30.2440.8.M.A
	SATINE ANTHRACITE	B.902.30.2440.9.S.A

Technical information

B 902



Can be produced in different sizes according to your needs.

decoline

B 906

Joint profile

Dimension	Surface	Inox / Code	Aluminium / Code
8 mm	SATINOX	B.906.8.2500.1.S.I	B.916.8.2500.1.S.I
	SUPER MIRROR	B.906.8.2440.2.S.M	B.916.8.2440.2.S.M
	MIRROR GOLD	B.906.8.2440.3.M.G	B.916.8.2440.3.M.G
	SATINE GOLD	B.906.8.2440.4.S.G	B.916.8.2440.4.S.G
	SHINE	B.906.8.2500.5.S.P	B.916.8.2500.5.S.P
	MIRROR BRONZE	B.906.8.2440.6.M.B	B.916.8.2440.6.M.B
	SATINE BRONZE	B.906.8.2440.7.S.B	B.916.8.2440.7.S.B
	MIRROR ANTHRACITE	B.906.8.2440.8.M.A	B.916.8.2440.8.M.A
	SATINE ANTHRACITE	B.906.8.2440.9.S.A	B.916.8.2440.9.S.A
10 mm	SATINOX	B.906.10.2500.1.S.I	B.916.10.2500.1.S.I
	SUPER MIRROR	B.906.10.2440.2.S.M	B.916.10.2440.2.S.M
	MIRROR GOLD	B.906.10.2440.3.M.G	B.916.10.2440.3.M.G
	SATINE GOLD	B.906.10.2440.4.S.G	B.916.10.2440.4.S.G
	SHINE	B.906.10.2500.5.S.P	B.916.10.2500.5.S.P
	MIRROR BRONZE	B.906.10.2440.6.M.B	B.916.10.2440.6.M.B
	SATINE BRONZE	B.906.10.2440.7.S.B	B.916.10.2440.7.S.B
	MIRROR ANTHRACITE	B.906.10.2440.8.M.A	B.916.10.2440.8.M.A
	SATINE ANTHRACITE	B.906.10.2440.9.S.A	B.916.10.2440.9.S.A
12 mm	SATINOX	B.906.12.2500.1.S.I	B.916.12.2500.1.S.I
	SUPER MIRROR	B.906.12.2440.2.S.M	B.916.12.2440.2.S.M
	MIRROR GOLD	B.906.12.2440.3.M.G	B.916.12.2440.3.M.G
	SATINE GOLD	B.906.12.2440.4.S.G	B.916.12.2440.4.S.G
	SHINE	B.906.12.2500.5.S.P	B.916.12.2500.5.S.P
	MIRROR BRONZE	B.906.12.2440.6.M.B	B.916.12.2440.6.M.B
	SATINE BRONZE	B.906.12.2440.7.S.B	B.916.12.2440.7.S.B
	MIRROR ANTHRACITE	B.906.12.2440.8.M.A	B.916.12.2440.8.M.A
	SATINE ANTHRACITE	B.906.12.2440.9.S.A	B.916.12.2440.9.S.A
14 mm	SATINOX	B.906.14.2500.1.S.I	B.916.14.2500.1.S.I
	SUPER MIRROR	B.906.14.2440.2.S.M	B.916.14.2440.2.S.M
	MIRROR GOLD	B.906.14.2440.3.M.G	B.916.14.2440.3.M.G
	SATINE GOLD	B.906.14.2440.4.S.G	B.916.14.2440.4.S.G
	SHINE	B.906.14.2500.5.S.P	B.916.14.2500.5.S.P
	MIRROR BRONZE	B.906.14.2440.6.M.B	B.916.14.2440.6.M.B
	SATINE BRONZE	B.906.14.2440.7.S.B	B.916.14.2440.7.S.B
	MIRROR ANTHRACITE	B.906.14.2440.8.M.A	B.916.14.2440.8.M.A
	SATINE ANTHRACITE	B.906.14.2440.9.S.A	B.916.14.2440.9.S.A

Technical information





Can be produced in different sizes according to your needs.

form

PRF 200
PRF 240

Internal and external outer
Corner edge protection profile

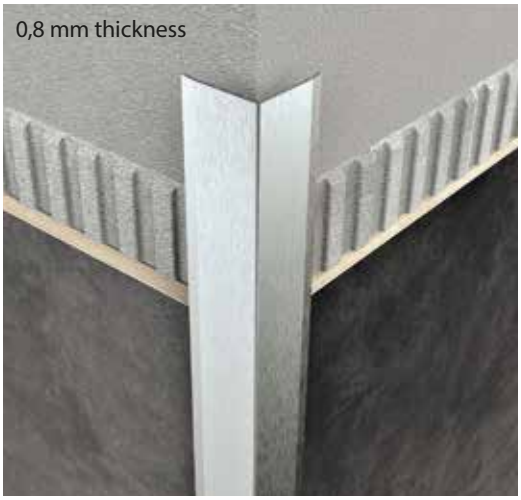

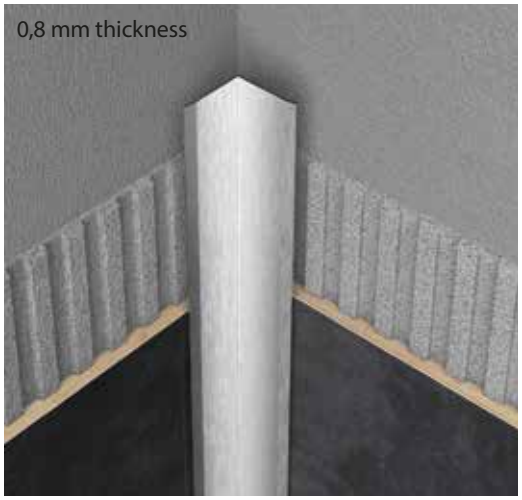

Dimension	Surface	Code
16 mm EXTERNAL	SATINOX	PRF.200.16.2500.1.S.I
	SUPER MIRROR	PRF.200.16.2440.2.S.M
	MIRROR GOLD	PRF.200.16.2440.3.M.G
	SATINE GOLD	PRF.200.16.2440.4.S.G
	SHINE	PRF.200.16.2500.5.S.P
	MIRROR BRONZE	PRF.200.16.2440.6.M.B
	SATINE BRONZE	PRF.200.16.2440.7.S.B
	MIRROR ANTHRACITE	PRF.200.16.2440.8.M.A
	SATINE ANTHRACITE	PRF.200.16.2440.9.S.A
32 mm EXTERNAL	SATINOX	PRF.200.32.2500.1.S.I
	SUPER MIRROR	PRF.200.32.2440.2.S.M
	MIRROR GOLD	PRF.200.32.2440.3.M.G
	SATINE GOLD	PRF.200.32.2440.4.S.G
	SHINE	PRF.200.32.2500.5.S.P
	MIRROR BRONZE	PRF.200.32.2440.6.M.B
	SATINE BRONZE	PRF.200.32.2440.7.S.B
	MIRROR ANTHRACITE	PRF.200.32.2440.8.M.A
	SATINE ANTHRACITE	PRF.200.32.2440.9.S.A
16 mm INTERNAL	SATINOX	PRF.240.16.2500.1.S.I
	SUPER MIRROR	PRF.240.16.2440.2.S.M
	MIRROR GOLD	PRF.240.16.2440.3.M.G
	SATINE GOLD	PRF.240.16.2440.4.S.G
	SHINE	PRF.240.16.2500.5.S.P
	MIRROR BRONZE	PRF.240.16.2440.6.M.B
	SATINE BRONZE	PRF.240.16.2440.7.S.B
	MIRROR ANTHRACITE	PRF.240.16.2440.8.M.A
	SATINE ANTHRACITE	PRF.240.16.2440.9.S.A
32 mm INTERNAL	SATINOX	PRF.240.32.2500.1.S.I
	SUPER MIRROR	PRF.240.32.24402.S.M
	MIRROR GOLD	PRF.240.32.2440.3.M.G
	SATINE GOLD	PRF.240.32.2440.4.S.G
	SHINE	PRF.240.32.2500.5.S.P
	MIRROR BRONZE	PRF.240.32.2440.6.M.B
	SATINE BRONZE	PRF.240.32.2440.7.S.B
	MIRROR ANTHRACITE	PRF.240.32.2440.8.M.A
	SATINE ANTHRACITE	PRF.240.32.2440.9.S.A

Technical information

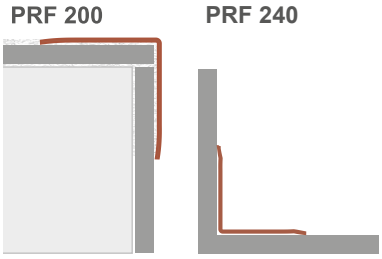



Can be produced in different sizes according to your needs.

rene

PRF.300 Internal outer edge protection profile

0,8 mm thickness

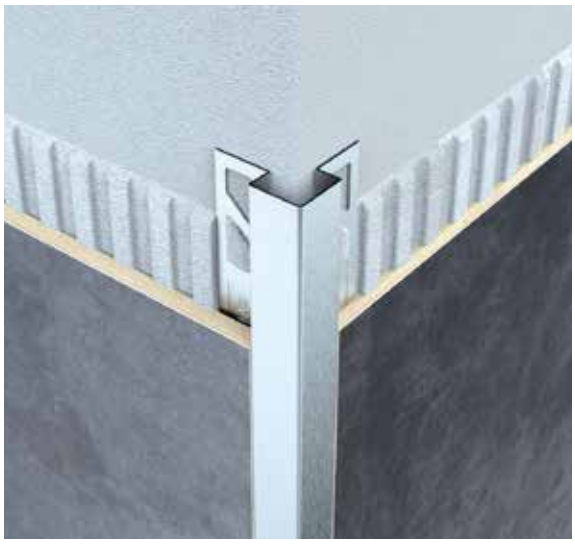

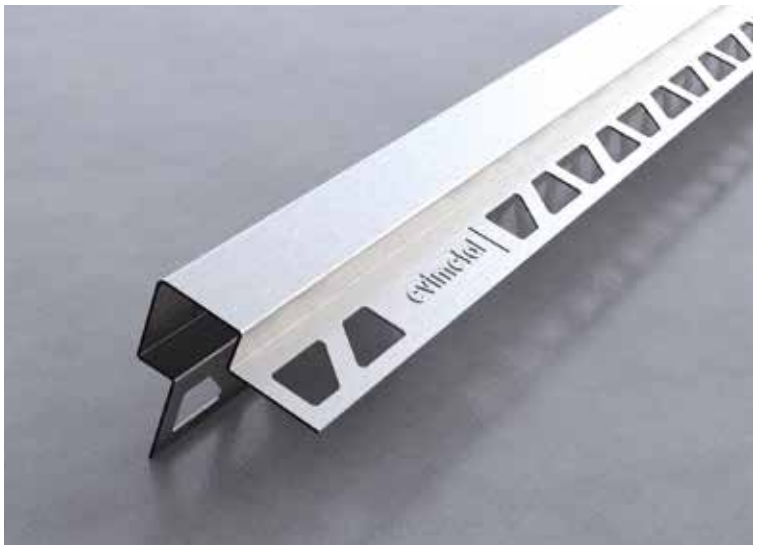

Dimension	Surface	Code
22/10 mm	SATINOX	PRF.300.22.10.2500.1.S.I
	SUPER MIRROR	PRF.300.22.10.2440.2.S.M
	MIRROR GOLD	PRF.300.22.10.2440.3.M.G
	SATINE GOLD	PRF.300.22.10.2440.4.S.G
	SHINE	PRF.300.22.10.2500.5.S.P
	MIRROR BRONZE	PRF.300.22.10.2440.6.M.B
	SATINE BRONZE	PRF.300.22.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.300.22.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.300.22.10.2440.9.S.A
36/10 mm	SATINOX	PRF.300.36.10.2500.1.S.I
	SUPER MIRROR	PRF.300.36.10.2440.2.S.M
	MIRROR GOLD	PRF.300.36.10.2440.3.M.G
	SATINE GOLD	PRF.300.36.10.2440.4.S.G
	SHINE	PRF.300.36.10.2500.5.S.P
	MIRROR BRONZE	PRF.300.36.10.2440.6.M.B
	SATINE BRONZE	PRF.300.36.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.300.36.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.300.36.10.2440.9.S.A
36/12 mm	SATINOX	PRF.300.36.12.2500.1.S.I
	SUPER MIRROR	PRF.300.36.12.2440.2.S.M
	MIRROR GOLD	PRF.300.36.12.2440.3.M.G
	SATINE GOLD	PRF.300.36.12.2440.4.S.G
	SHINE	PRF.300.36.12.2500.5.S.P
	MIRROR BRONZE	PRF.300.36.12.2440.6.M.B
	SATINE BRONZE	PRF.300.36.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.300.36.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.300.36.12.2440.9.S.A
36/20 mm	SATINOX	PRF.300.36.20.2500.1.S.I
	SUPER MIRROR	PRF.300.36.20.2440.2.S.M
	MIRROR GOLD	PRF.300.36.20.2440.3.M.G
	SATINE GOLD	PRF.300.36.20.2440.4.S.G
	SHINE	PRF.300.36.20.2500.5.S.P
	MIRROR BRONZE	PRF.300.36.20.2440.6.M.B
	SATINE BRONZE	PRF.300.36.20.2440.7.S.B
	MIRROR ANTHRACITE	PRF.300.36.20.2440.8.M.A
	SATINE ANTHRACITE	PRF.300.36.20.2440.9.S.A

Technical information

PRF.300



PRF.300

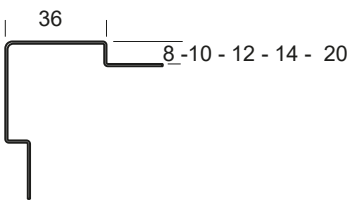

Can be produced in different sizes according to your needs.

PRF 300 22/10 mm price is valid for 8-12 mm.
PRF 300 36/10 mm price is valid for 8 mm.
PRF 300 36/12 mm price is valid for 14 mm.

mare

PRF.600

Internal stairs edge protection profile

Aluminium



F.601

Dimension	Surface	Code	Code	Code
10 mm	SATINOX SHINE	PRF.600.10.2500.1.S.I PRF.600.10.2500.5.S.P	PRF.606.10.2500.1.S.I PRF.606.10.2500.5.S.P	PRF.607.10.2500.1.S.I PRF.607.10.2500.5.S.P
12 mm	SATINOX SHINE	PRF.600.12.2500.1.S.I PRF.600.12.2500.5.S.P	PRF.606.12.2500.1.S.I PRF.606.12.2500.5.S.P	PRF.607.12.2500.1.S.I PRF.607.12.2500.5.S.P
14 mm	SATINOX SHINE	PRF.600.14.2500.1.S.I PRF.600.14.2500.5.S.P	PRF.606.14.2500.1.S.I PRF.606.14.2500.5.S.P	PRF.607.14.2500.1.S.I PRF.607.14.2500.5.S.P

Can be produced in different sizes according to your needs.



Cover Holder

aks 164	SATINOX straight cover holder	AKS.164.1.S.I
aks 166	SATINOX cover holder with edge	AKS.166.1.S.I

Cover opening apparatus

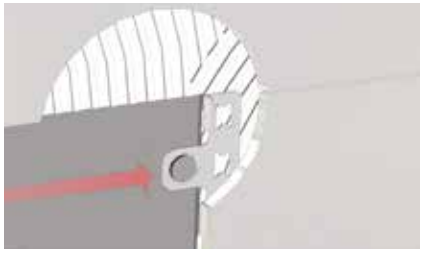

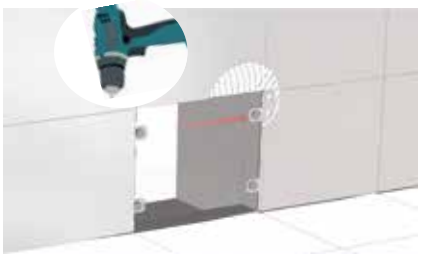

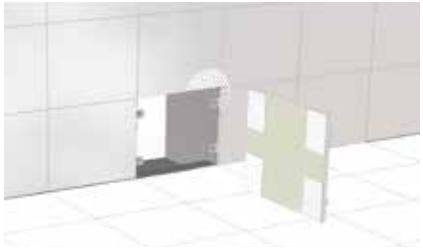

Technical drawing







alfa

PRF 290

Internal balcon terrace drip profile

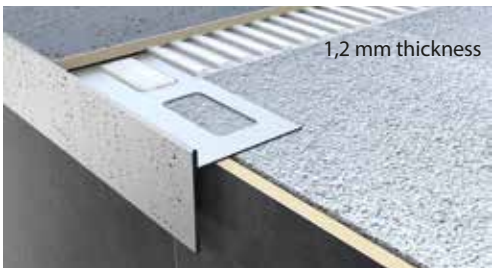

Technical information

Dimension	Surface	Code
65 mm PRF 290	SATINOX 11 mm SATINOX 14 mm	PRF.290.65.11.2500.1.S.I PRF.290.65.14.2500.1.S.I
85 mm PRF 290	SATINOX 11 mm SATINOX 14 mm	PRF.290.85.11.2500.1.S.I PRF.290.85.14.2500.1.S.I
110 mm PRF 290	SATINOX 11 mm SATINOX 14 mm	PRF.290.110.11.2500.1.S.I PRF.290.110.14.2500.1.S.I
65 mm PRF 292	SATINOX 11 mm SATINOX 14 mm	PRF.292.65.11.2500.1.S.I PRF.292.65.14.2500.1.S.I
85 mm PRF 292	SATINOX 11 mm SATINOX 14 mm	PRF.292.85.11.1.S.I PRF.292.85.14.1.S.I
110 mm PRF 292	SATINOX 11 mm SATINOX 14 mm	PRF.292.110.11.1.S.I PRF.292.110.14.1.S.I
65 mm PRF 293	SATINOX 11 mm SATINOX 14 mm	PRF.293.65.11.1.S.I PRF.293.65.14.1.S.I
85 mm PRF 293	SATINOX 11 mm SATINOX 14 mm	PRF.293.85.11.1.S.I PRF.293.85.14.1.S.I
110 mm PRF 293	SATINOX 11 mm SATINOX 14 mm	PRF.293.110.11.1.S.I PRF.293.110.14..1.S.I

PRF.290



65-85-110 mm

Can be produced in different sizes according to your needs.

F.293

F.292

genex
eta

PRF.140
PRF 450

Dilatation profile
Angled corner profile

0.8 mm thickness

Dimension	Surface	Code
8 mm	SATINOX	PRF.140.8.2500.1.S.I
10 mm	SATINOX	PRF.140.10.2500.1.S.I
12 mm	SATINOX	PRF.140.12.2500.1.S.I
14 mm	SATINOX	PRF.140.14.2500.1.S.I
10 mm	SATINOX	PRF.450.10.2500.1.S.I
	SUPER MIRROR	PRF.450.10.2440.2.S.M
	MIRROR GOLD	PRF.450.10.2440.3.M.G
	SATINE GOLD	PRF.450.10.2440.4.S.G
	SHINE	PRF.450.10.2500.5.S.P
	MIRROR BRONZE	PRF.450.10.2440.6.M.B
	SATINE BRONZE	PRF.450.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.450.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.450.10.2440.9.S.A
12 mm	SATINOX	PRF.450.12.2500.1.S.I
	SUPER MIRROR	PRF.450.12.2440.2.S.M
	MIRROR GOLD	PRF.450.12.2440.3.M.G
	SATINE GOLD	PRF.450.12.2440.4.S.G
	SHINE	PRF.450.12.2500.5.S.P
	MIRROR BRONZE	PRF.450.12.2440.6.M.B
	SATINE BRONZE	PRF.450.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.450.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.450.12.2440.9.S.A

Technical information





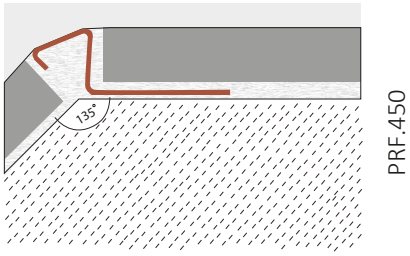



base

PRF 900
PRF 940
PRF 950

Baseboard profiles





Dimension	Surface	Code
40 mm PRF 940	SATINOX	PRF.940.40.10.2500.1.S.I
	SUPER MIRROR	PRF.940.40.10.2440.2.S.M
	MIRROR GOLD	PRF.940.40.10.2440.3.M.G
	SHINE	PRF.940.40.10.2500.5.S.P
	MIRROR BRONZE	PRF.940.40.10.2440.6.M.B
70 mm PRF 940	SATINOX	PRF.940.70.10.2500.1.S.I
	SUPER MIRROR	PRF.940.70.10.2440.2.S.M
	MIRROR GOLD	PRF.940.70.10.2440.3.M.G
	SHINE	PRF.940.70.10.2500.5.S.P
	MIRROR BRONZE	PRF.940.70.10.2440.6.M.B
40 mm PRF 950	SATINOX	PRF.950.40.10.2500.1.S.I
	SUPER MIRROR	PRF.950.40.10.2440.2.S.M
	MIRROR GOLD	PRF.950.40.10.2440.3.M.G
	SHINE	PRF.950.40.10.2500.5.S.P
	MIRROR BRONZE	PRF.950.40.10.2440.6.M.B
70 mm PRF 950	SATINOX	PRF.950.70.10.2500.1.S.I
	SUPER MIRROR	PRF.950.70.10.2440.2.S.M
	MIRROR GOLD	PRF.950.70.10.2440.3.M.G
	SHINE	PRF.950.70.10.2500.5.S.P
	MIRROR BRONZE	PRF.950.70.10.2440.6.M.B
60 mm PRF 900	SATINOX	PRF.900.60.2500.1.S.I
	SHINE	PRF.900.60.2500.5.S.P
80 mm PRF 900	SATINOX	PRF.900.80.2500.1.S.I
	SHINE	PRF.900.80.2500.5.S.P
100 mm PRF 900	SATINOX	PRF.900.100.2500.1.S.I
	SHINE	PRF.900.100.2500.5.S.P

Technical information

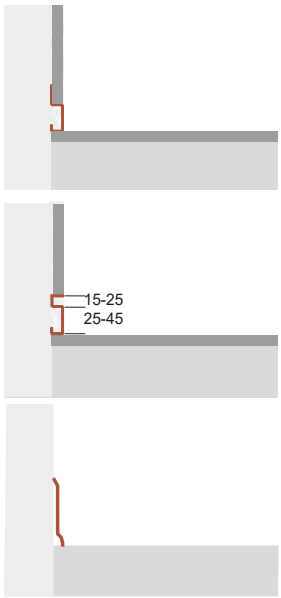

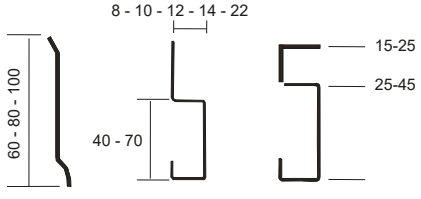

Can be produced in different sizes according to your needs.

kot

PRF 750
PRF 760

Stepless transitionn profiles

Dimension	Surface	Code
PRF 750	SATINOX	PRF.750.10.2500.1.S.I
	SUPER MIRROR	PRF.750.10.2440.2.S.M
	MIRROR GOLD	PRF.750.10.2440.3.M.G
	SATINE GOLD	PRF.750.10.2440.4.S.G
	SHINE	PRF.750.10.2500.5.S.P
	MIRROR BRONZE	PRF.750.10.2440.6.M.B
	SATINE BRONZE	PRF.750.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.750.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.750.10.2440.9.S.A
PRF 760	SATINOX	PRF.760.32.2500.1.S.I
	SUPER MIRROR	PRF.760.32.2440.2.S.M
	MIRROR GOLD	PRF.760.32.2440.3.M.G

Technical information

PRF.950



PRF.960

Can be produced in different sizes according to your needs.

kot

PRF.740
PRF.700
PRF.904

Stepless transition profiles
Wall covering profile

Dimension	Surface	Code
PRF 740 10 mm	SATINOX	PRF.740.10.2500.1.S.I
	SUPER MIRROR	PRF.740.10.2440.2.S.M
	MIRROR GOLD	PRF.740.10.2440.3.M.G
	SATINE GOLD	PRF.740.10.2440.4.S.G
	SHINE	PRF.740.10.2500.5.S.P
	MIRROR BRONZE	PRF.740.10.2440.6.M.B
	SATINE BRONZE	PRF.740.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.740.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.740.10.2440.9.S.A
PRF 700 10 mm	SATINOX	PRF.700.10.2500.1.S.I
	SUPER MIRROR	PRF.700.10.2440.2.S.M
	MIRROR GOLD	PRF.700.10.2440.3.M.G
	SATINE GOLD	PRF.700.10.2440.4.S.G
	SHINE	PRF.700.10.2500.5.S.P
	MIRROR BRONZE	PRF.700.10.2440.6.M.B
	SATINE BRONZE	PRF.700.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.700.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.700.10.2440.9.S.A
PRF 904 8 mm	SATINOX	PRF.904.8.2500.1.S.I
	SUPER MIRROR	PRF.904.8.2440.2.S.M
	MIRROR GOLD	PRF.904.8.2440.3.M.G
	SATINE GOLD	PRF.904.8.2440.4.S.G
	SHINE	PRF.904.8.2500.5.S.P
	MIRROR BRONZE	PRF.904.8.2440.6.M.B
	SATINE BRONZE	PRF.904.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.904.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.904.8.2440.9.S.A
PRF 904 10 mm	SATINOX	PRF.904.10.2500.1.S.I
	SUPER MIRROR	PRF.904.10.2440.2.S.M
	MIRROR GOLD	PRF.904.10.2440.3.M.G
	SATINE GOLD	PRF.904.10.2440.4.S.G
	SHINE	PRF.904.10.2500.5.S.P
	MIRROR BRONZE	PRF.904.10.2440.6.M.B
	SATINE BRONZE	PRF.904.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.904.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.904.10.2440.9.S.A
PRF 904 12 mm	SATINOX	PRF.904.12.2500.1.S.I
	SUPER MIRROR	PRF.904.12.2440.2.S.M
	MIRROR GOLD	PRF.904.12.2440.3.M.G
	SATINE GOLD	PRF.904.12.2440.4.S.G
	SHINE	PRF.904.12.2500.5.S.P
	MIRROR BRONZE	PRF.904.12.2440.6.M.B
	SATINE BRONZE	PRF.904.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.904.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.904.12.2440.9.S.A

Technical information





PRF.740



PRF.700



PRF.904



Can be produced in different sizes according to your needs.

arm

PRF 130

Corner edge protection profile

0.8 mm thickness

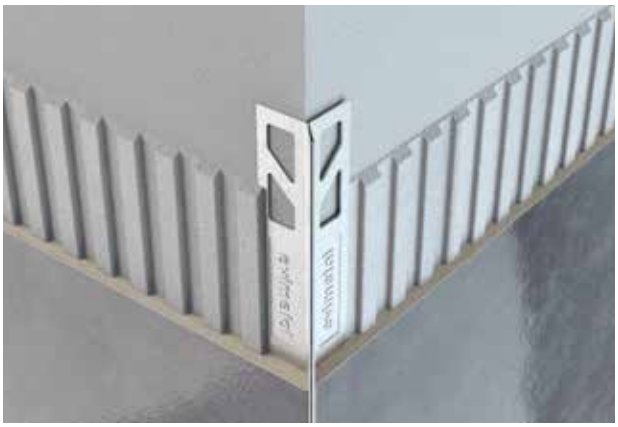

Dimension	Surface	Code
8 mm	SATINOX	PRF.130.8.2500.1.S.I
	SUPER MIRROR	PRF.130.8.2440.2.S.M
	MIRROR GOLD	PRF.130.8.2440.3.M.G
	SATINE GOLD	PRF.130.8.2440.4.S.G
	SHINE	PRF.130.8.2500.5.S.P
	MIRROR BRONZE	PRF.130.8.2440.6.M.B
	SATINE BRONZE	PRF.130.8.2440.7.S.B
	MIRROR ANTHRACITE	PRF.130.8.2440.8.M.A
	SATINE ANTHRACITE	PRF.130.8.2440.9.S.A
10 mm	SATINOX	PRF.130.10.2500.1.S.I
	SUPER MIRROR	PRF.130.10.2440.2.S.M
	MIRROR GOLD	PRF.130.10.2440.3.M.G
	SATINE GOLD	PRF.130.10.2440.4.S.G
	SHINE	PRF.130.10.2500.5.S.P
	MIRROR BRONZE	PRF.130.10.2440.6.M.B
	SATINE BRONZE	PRF.130.10.2440.7.S.B
	MIRROR ANTHRACITE	PRF.130.10.2440.8.M.A
	SATINE ANTHRACITE	PRF.130.10.2440.9.S.A
12 mm	SATINOX	PRF.130.12.2500.1.S.I
	SUPER MIRROR	PRF.130.12.2440.2.S.M
	MIRROR GOLD	PRF.130.12.2440.3.M.G
	SATINE GOLD	PRF.130.12.2440.4.S.G
	SHINE	PRF.130.12.2500.5.S.P
	MIRROR BRONZE	PRF.130.12.2440.6.M.B
	SATINE BRONZE	PRF.130.12.2440.7.S.B
	MIRROR ANTHRACITE	PRF.130.12.2440.8.M.A
	SATINE ANTHRACITE	PRF.130.12.2440.9.S.A
14 mm	SATINOX	PRF.130.14.2500.1.S.I
	SUPER MIRROR	PRF.130.14.2440.2.S.M
	MIRROR GOLD	PRF.130.14.2440.3.M.G
	SATINE GOLD	PRF.130.14.2440.4.S.G
	SHINE	PRF.130.14.2500.5.S.P
	MIRROR BRONZE	PRF.130.14.2440.6.M.B
	SATINE BRONZE	PRF.130.14.2440.7.S.B
	MIRROR ANTHRACITE	PRF.130.14.2440.8.M.A
	SATINE ANTHRACITE	PRF.130.14.2440.9.S.A

Technical information

PRF.130



Can be produced in different sizes according to your needs.

Attractive designs with glitter of metal

Decorative Profiles

decoline

B 908

Dimension	Surface	Code
1.0 * 244	SATINOX	B.908.10.2500.1.S.I
	SUPER MIRROR	B.908.10.2440.2.S.M
	MIRROR GOLD	B.908.10.2440.3.M.G
	SATINE GOLD	B.908.10.2440.4.S.G
	SHINE	B.908.10.2500.5.S.P
	MIRROR BRONZE	B.908.10.2440.6.M.B
	SATINE BRONZE	B.908.10.2440.7.S.B
	MIRROR ANTHRACITE	B.908.10.2440.8.M.A
	SATINE ANTHRACITE	B.908.10.2440.9.S.A
1.5 * 244	SATINOX	B.908.15.2500.1.S.I
	SUPER MIRROR	B.908.15.2440.2.S.M
	MIRROR GOLD	B.908.15.2440.3.M.G
	SATINE GOLD	B.908.15.2440.4.S.G
	SHINE	B.908.15.2500.5.S.P
	MIRROR BRONZE	B.908.15.2440.6.M.B
	SATINE BRONZE	B.908.15.2440.7.S.B
	MIRROR ANTHRACITE	B.908.15.2440.8.M.A
	SATINE ANTHRACITE	B.908.15.2440.9.S.A
2.3 * 244	SATINOX	B.908.23.2500.1.S.I
	SUPER MIRROR	B.908.23.2440.2.S.M
	MIRROR GOLD	B.908.23.2440.3.M.G
	SATINE GOLD	B.908.23.2440.4.S.G
	SHINE	B.908.23.2500.5.S.P
	MIRROR BRONZE	B.908.23.2440.6.M.B
	SATINE BRONZE	B.908.23.2440.7.S.B
	MIRROR ANTHRACITE	B.908.23.2440.8.M.A
	SATINE ANTHRACITE	B.908.23.2440.9.S.A
3.0 * 244	SATINOX	B.908.30.2500.1.S.I
	SUPER MIRROR	B.908.30.2440.2.S.M
	MIRROR GOLD	B.908.30.2440.3.M.G
	SATINE GOLD	B.908.30.2440.4.S.G
	SHINE	B.908.30.2500.5.S.P
	MIRROR BRONZE	B.908.30.2440.6.M.B
	SATINE BRONZE	B.908.30.2440.7.S.B
	MIRROR ANTHRACITE	B.908.30.2440.8.M.A
	SATINE ANTHRACITE	B.908.30.2440.9.S.A

Technical information

B.908

10 - 15 - 23 - 30 mm

Can be produced in different sizes according to your needs.

decoline

B 907

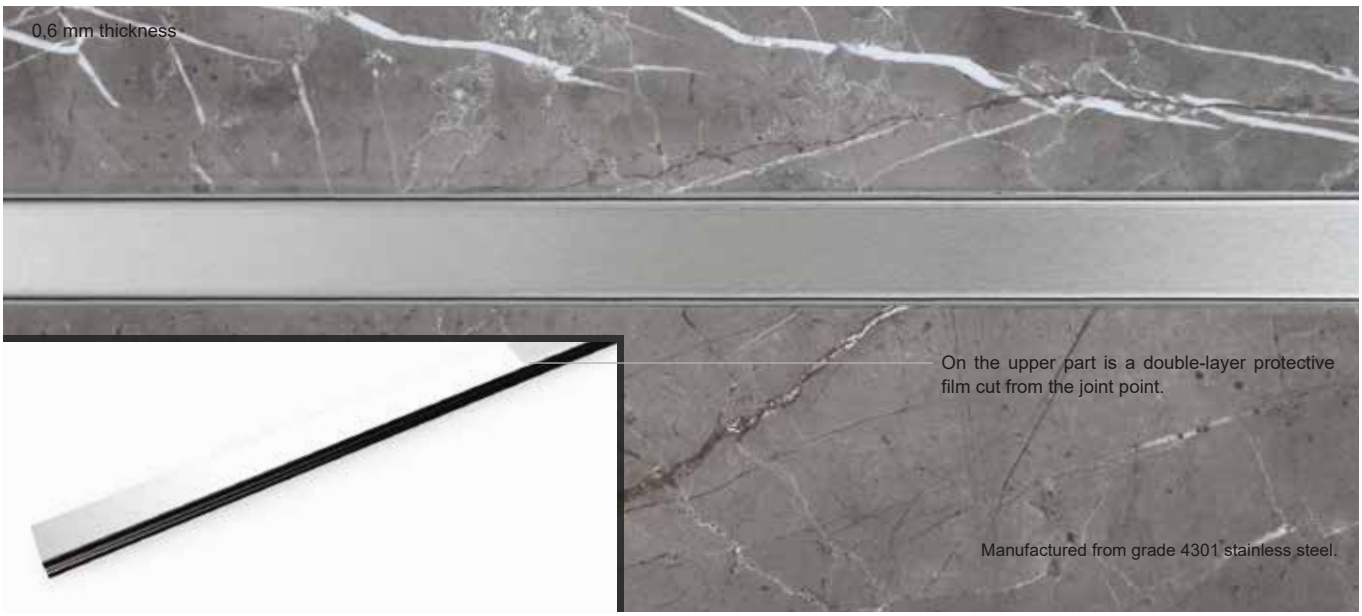

Dimension	Surface	Inox / Code	Aluminium / Code
1.5*244	SATINOX	B.907.15.2500.1.S.I	B.917.10.2500.1.S.I
	SUPER MIRROR	B.907.15.2440.2.S.M	B.917.10.2440.2.S.M
	MIRROR GOLD	B.907.15.2440.3.M.G	B.917.10.2440.3.M.G
	SHINE	B.907.15.2500.5.S.P	B.917.10.2500.5.S.P
	MIRROR BRONZE	B.907.15.2440.6.M.B	B.917.10.2440.6.M.B
	MIRROR ANTHRACITE	B.907.15.2440.8.M.A	B.917.10.2440.8.M.A
2.3*244	SATINOX	B.907.23.2500.1.S.I	
	SUPER MIRROR	B.907.23.2440.2.S.M	
	MIRROR GOLD	B.907.23.2440.3.M.G	
	SHINE	B.907.23.2500.5.S.P	
	MIRROR BRONZE	B.907.23.2440.6.M.B	
	MIRROR ANTHRACITE	B.907.23.2440.8.M.A	
3.0*244	SATINOX	B.907.30.2500.1.S.I	
	SUPER MIRROR	B.907.30.2440.2.S.M	
	MIRROR GOLD	B.907.30.2440.3.M.G	
	SHINE	B.907.30.2500.5.S.P	
	MIRROR BRONZE	B.907.30.2440.6.M.B	
	MIRROR ANTHRACITE	B.907.30.2440.8.M.A	
5.0*244	SATINOX	B.907.50.2500.1.S.I	
	SUPER MIRROR	B.907.50.2440.2.S.M	
	MIRROR GOLD	B.907.50.2440.3.M.G	
	SHINE	B.907.50.2500.5.S.P	
	MIRROR BRONZE	B.907.50.2440.6.M.B	
	MIRROR ANTHRACITE	B.907.50.2440.8.M.A	

Technical information

B.907



B.917



Can be produced in different sizes according to your needs.

decoline

B 645

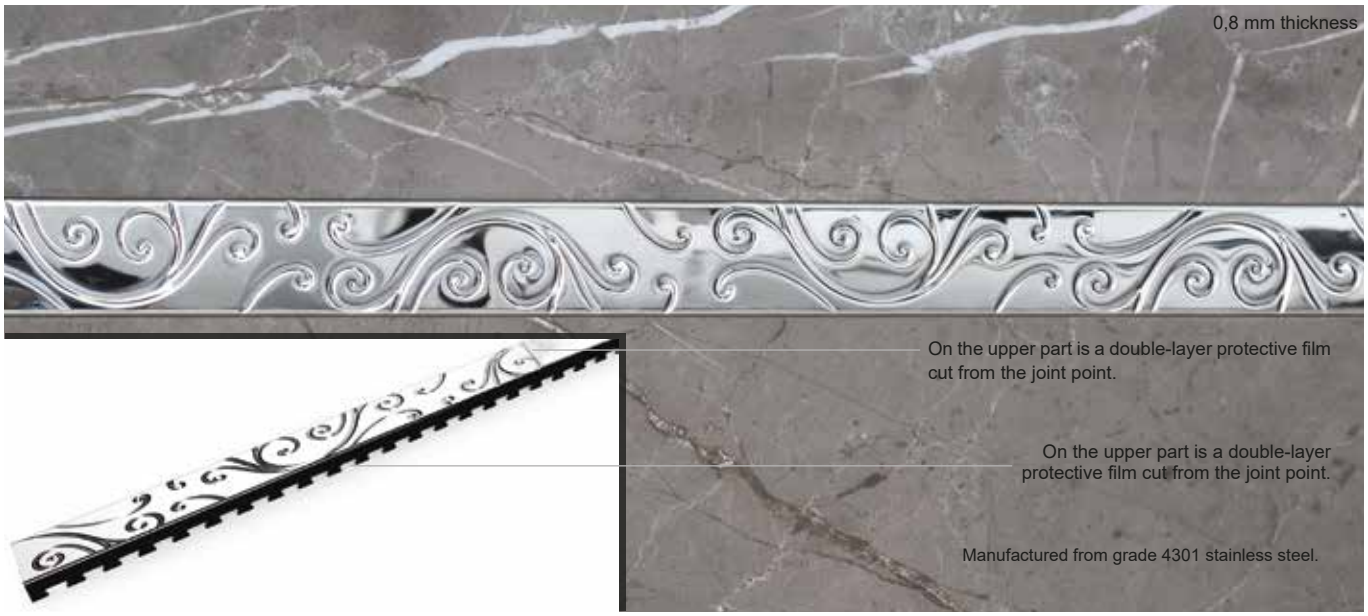

Dimension	Surface	Code
2.3*244	SATINOX	B.645.23.2500.1.S.I
	SUPER MIRROR	B.645.23.2440.2.S.M
	MIRROR GOLD	B.645.23.2440.3.M.G
	SATINE GOLD	B.645.23.2440.4.S.G
	MIRROR BRONZE	B.645.23.2440.6.M.B
	SATINE BRONZE	B.645.23.2440.7.S.B
	MIRROR ANTHRACITE	B.645.23.2440.8.M.A
	SATINE ANTHRACITE	B.645.23.2440.9.S.A
3.0*244	SATINOX	B.645.30.2500.1.S.I
	SUPER MIRROR	B.645.30.2440.2.S.M
	MIRROR GOLD	B.645.30.2440.3.M.G
	SATINE GOLD	B.645.30.2440.4.S.G
	MIRROR BRONZE	B.645.30.2440.6.M.B
	SATINE BRONZE	B.645.30.2440.7.S.B
	MIRROR ANTHRACITE	B.645.30.2440.8.M.A
	SATINE ANTHRACITE	B.645.30.2440.9.S.A

Technical information

B.645



decoline

B 740

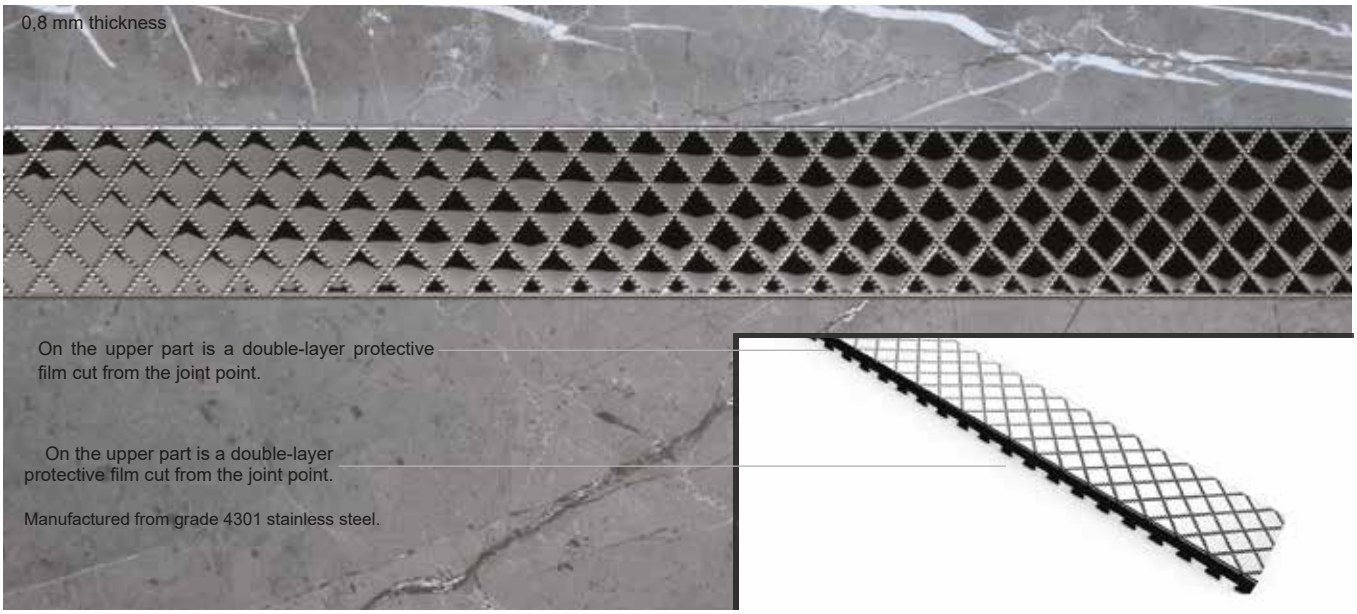

Dimension	Surface	Code
3.0 * 244	SATINOX	B.740.30.2500.1.S.I
	SUPER MIRROR	B.740.30.2440.2.S.M
	MIRROR GOLD	B.740.30.2440.3.M.G
	SATINE GOLD	B.740.30.2440.4.S.G
	MIRROR BRONZE	B.740.30.2440.6.M.B
	SATINE BRONZE	B.740.30.2440.7.S.B
	MIRROR ANTHRACITE	B.740.30.2440.8.M.A
	SATINE ANTHRACITE	B.740.30.2440.9.S.A
5.0 * 244	SATINOX	B.740.50.2500.1.S.I
	SUPER MIRROR	B.740.50.2440.2.S.M
	MIRROR GOLD	B.740.50.2440.3.M.G
	SATINE GOLD	B.740.50.2440.4.S.G
	MIRROR BRONZE	B.740.50.2440.6.M.B
	SATINE BRONZE	B.740.50.2440.7.S.B
	MIRROR ANTHRACITE	B.740.50.2440.8.M.A
	SATINE ANTHRACITE	B.740.50.2440.9.S.A

Technical information



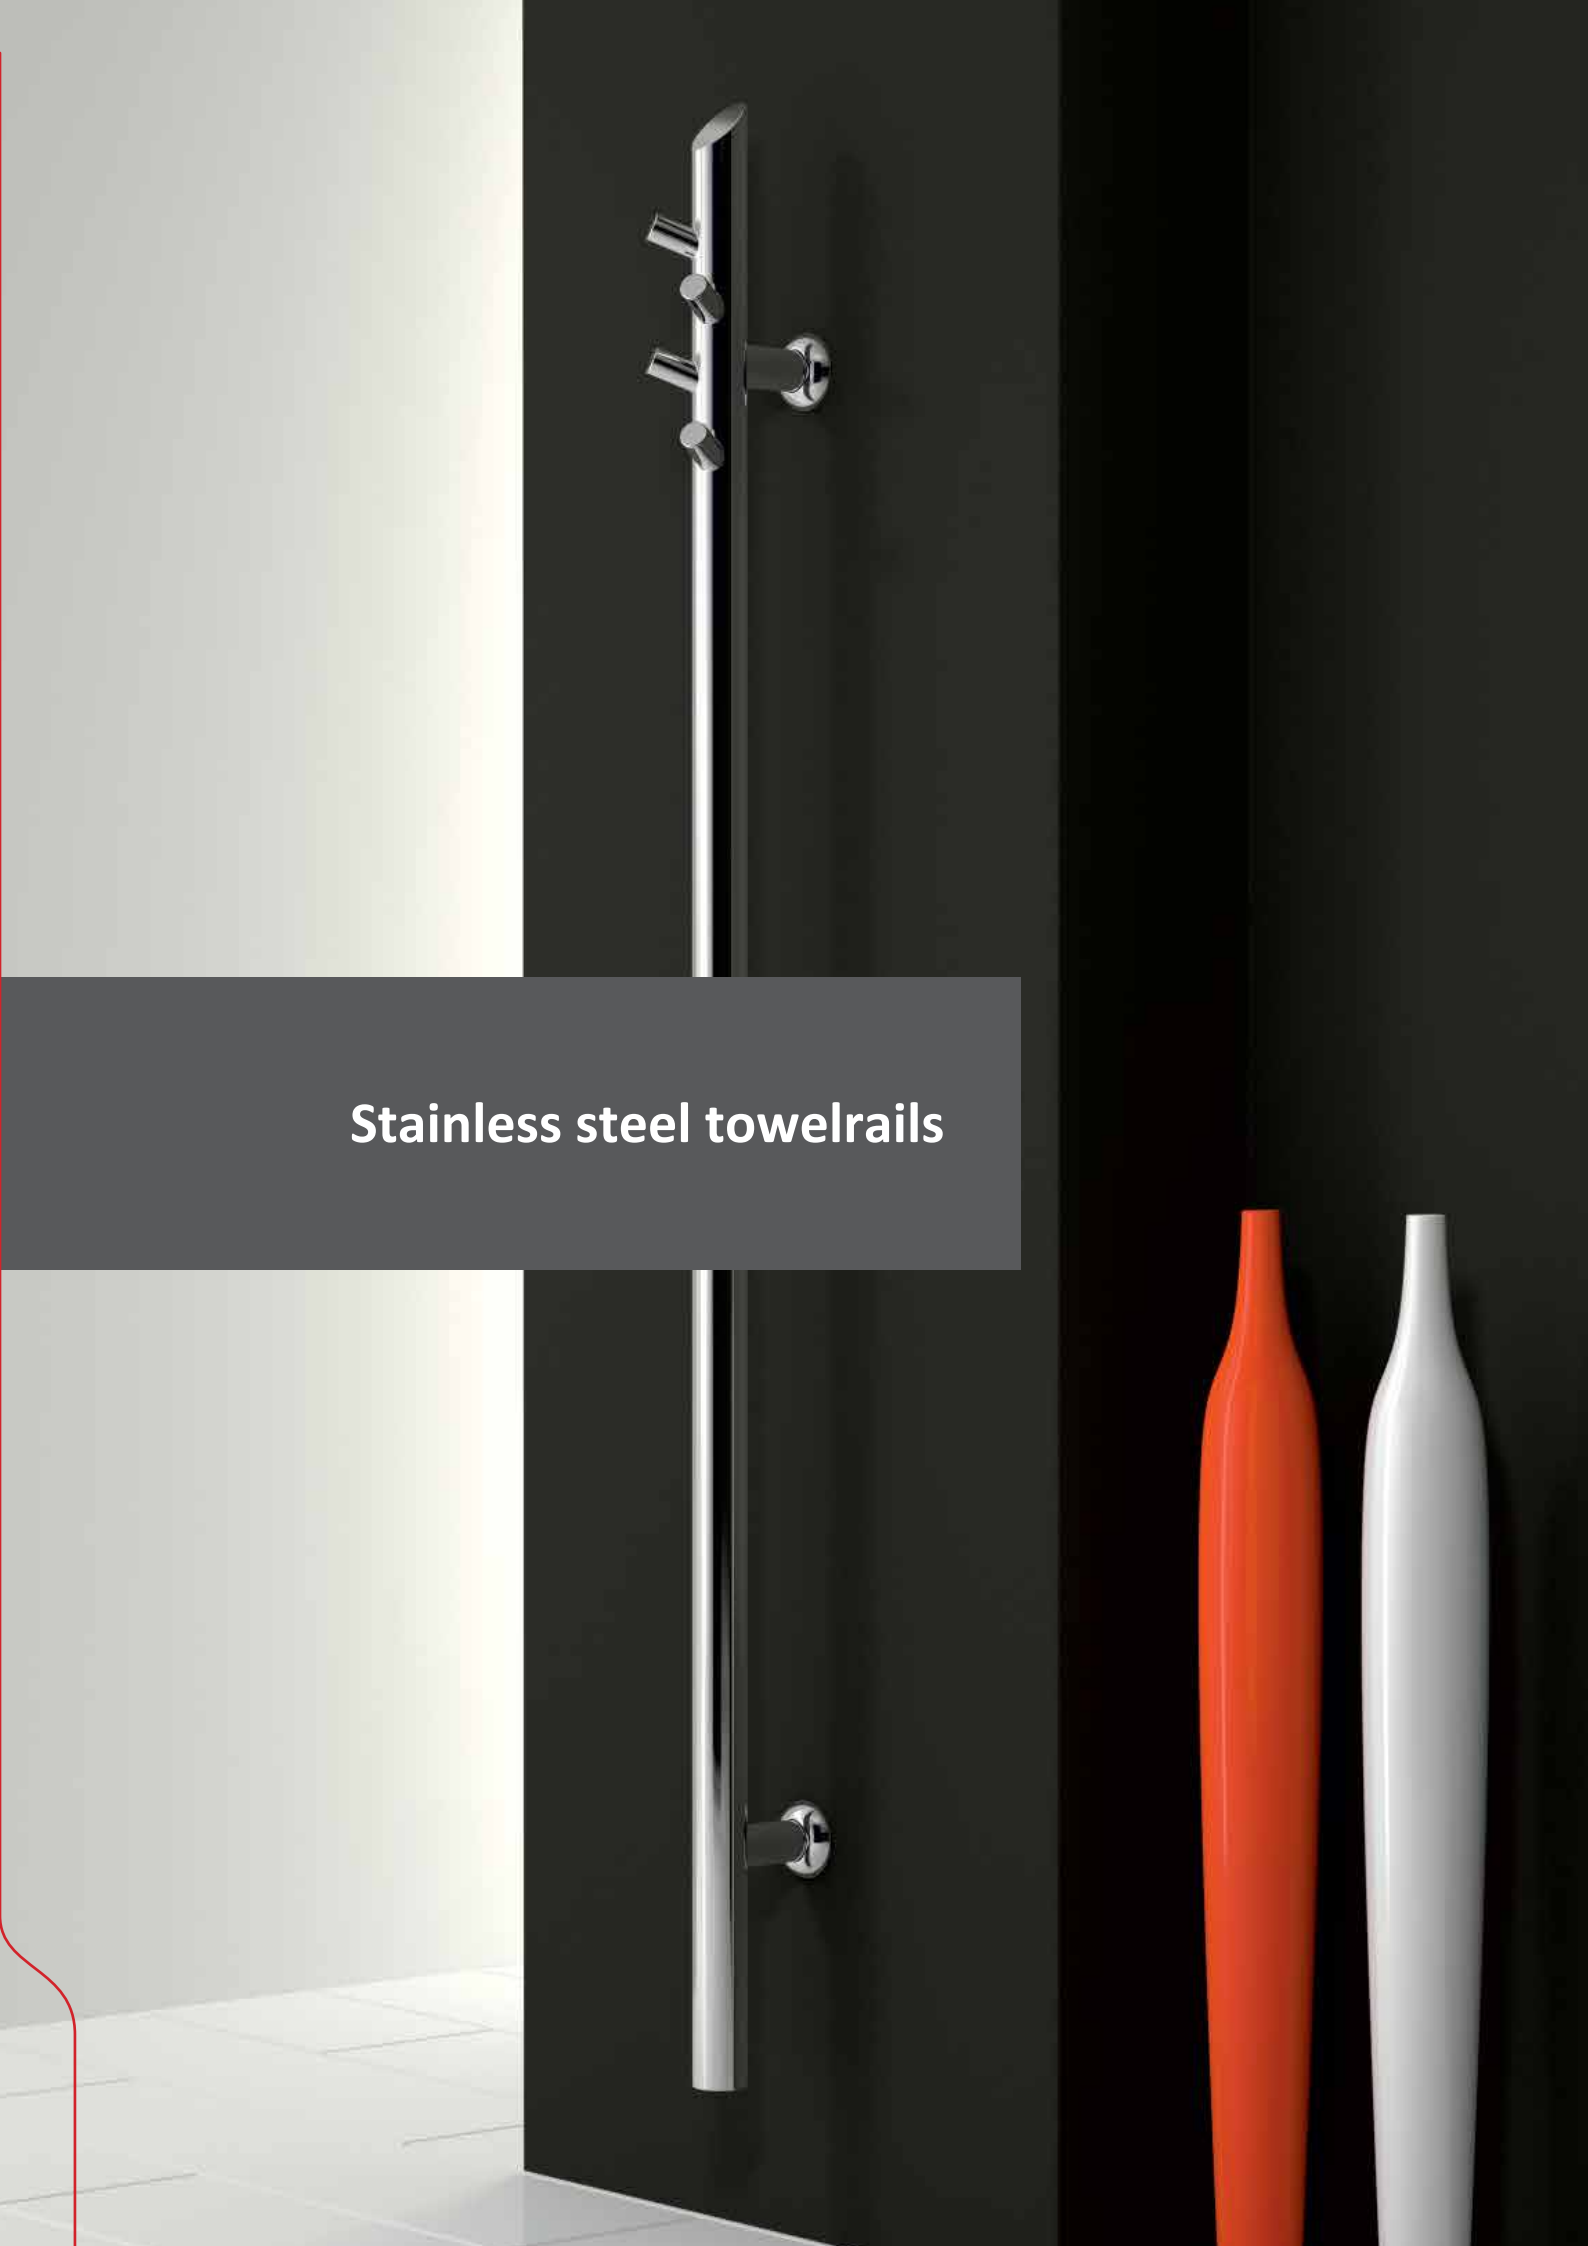

Stainless steel towelrails

Stainless steel towelrails
trea

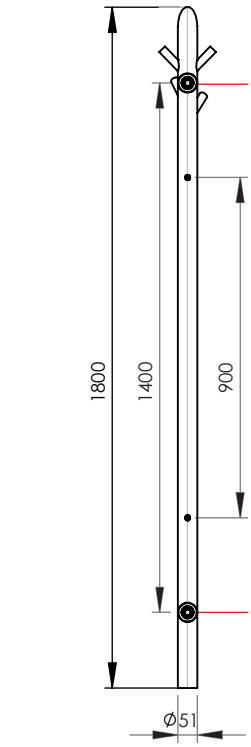

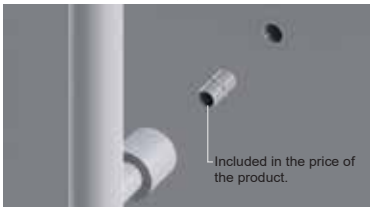

pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.

TREA	Dimension Height Lenght Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
TR.1800.1.S.I.C	1800 | 51 | 145	1400	50	100	1400	1	42	E/C	992	291
TR.1800.2.S.M.C	1800 | 51 | 145	1400	50	100	1400	1	42	E/C	992	291
TR.1800.3.M.G.C	1800 | 51 | 145	1400	50	100	1400	1	42	E/C	992	291

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails
adora

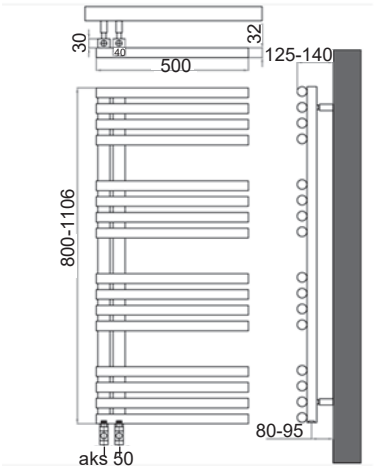

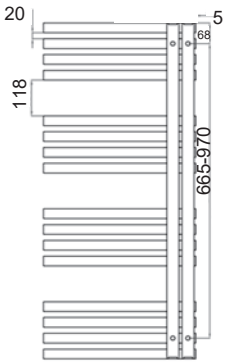

ADORA	Dimension Height / Lenght / Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
AD.800.500.2.S.M.C AD.800.500.3.M.G.C	800 | 500 | 60	50	80-95	125-140	665	12	32	E/C	1758	516
AD.1106.500.2.S.M.C AD.1106.500.3.M.G.C	1106| 500| 60	50	80-95	125-140	970	16	32	E/C	2435	688

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails
kreon

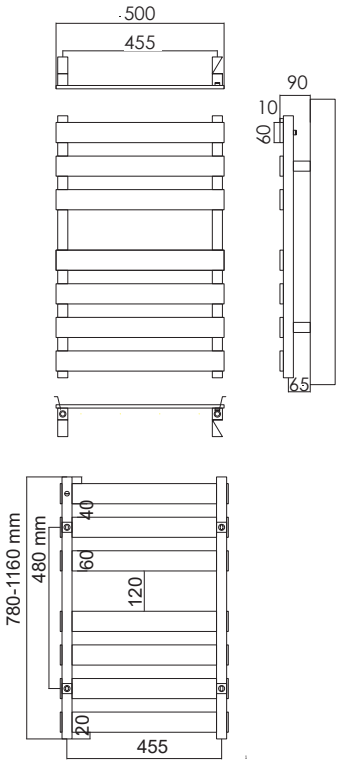

KREON	Dimension Height | Lenght | Depth	Pipe centre	Pipe centre to wall	Face to wall	Fixing centres	tubes /profiles piece	tubes /profiles Sizes	Energy	Heat outputs	
	mm	**mm**	**mm**	**mm**	**mm**	**piece**	**mm**	**E/C/D**	**btu**	**watt**
KR.780.500.1.S.I.C KR.780.500.2.S.M.C KR.780.500.3.M.G.C	780 | 500 | 40	455	80-95	105-120	480	7	60 10	E/C	2240	657
KR.1160.500.1.S.I.C KR.1160.500.2.S.M.C KR.1160.500.3.M.G.C	1160 | 500 | 40	455	80-95	105-120	860	10	60 10	E/C	2860	839

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails
troisi







TROISI	Dimension Height / Lenght / Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
TS 280.525.300.2.S.M.C TS 280.525.300.3.M.G.C	280 | 525 | 300	455	80-95	300	462	5	38-32-21	C	457	134

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails
dynamic

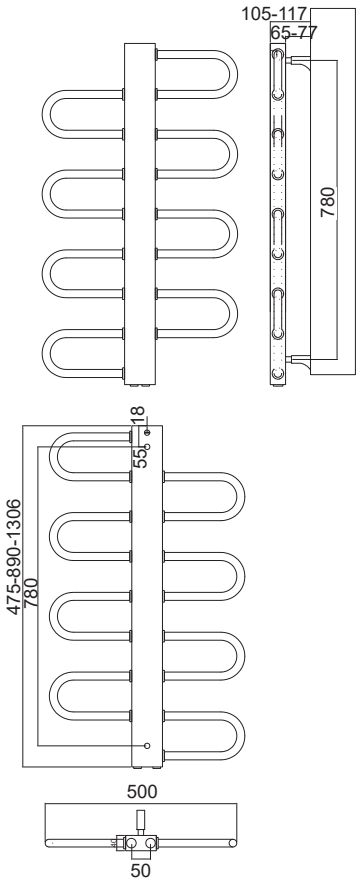

DYNAMIC	Dimension Height Lenght Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
DY.475.500.1.S.I.C DY.475.500.2.S.M.C DY.475.500.3.M.G.C	475 I 500 I 40	50	85-100	105-120	355	4	21/80-40	E/C	704	206
DY.890.500.1.S.I.C DY.890.500.2.S.M.C DY.890.500.3.M.G.C	890 I 500 I 40	50	85-100	105-120	780	8	21/80-40	E/C	1408	413
DY.1306.500.1.S.I.C DY.1306.500.2.S.M.C DY.1306.500.3.M.G.C	1306 I 500 I 40	50	85-100	105-120	1190	12	21/80-40	E/C	2112	619

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails
arden

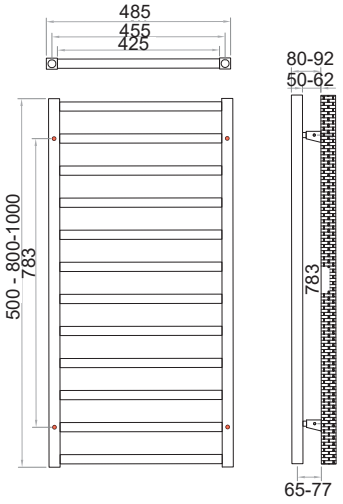

ARDEN	Dimension Height Lenght Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
AR.500.500.1.S.I.C AR.500.500.2.S.M.C AR.500.500.3.M.G.C	500 I 485 I 30	455	80-95	95-110	360	6	20-20/30-30	E/C	560	164
AR.800.500.1.S.I.C AR.800.500.2.S.M.C AR.800.500.3.M.G.C	800 I 485 I 30	455	80-95	95-110	580	9	20-20/30-30	E/C	825	242
AR.1000.500.1.S.I.C AR.1000.500.2.S.M.C AR.1000.500.3.M.G.C	1000 I 485 I 30	455	80-95	95-110	780	12	20-20/30-30	E/C	1100	323

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Stainless steel towelrails

aria

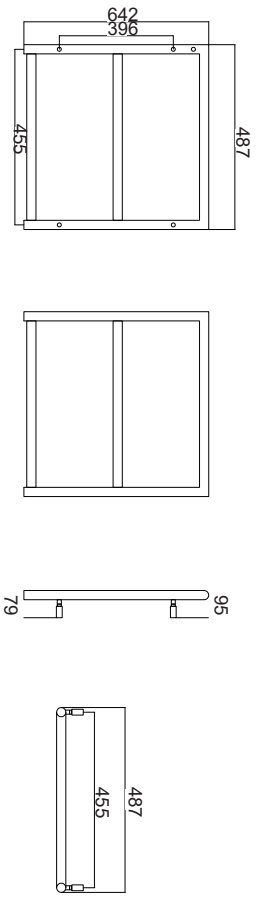

ARIA	Dimension Height Lenght Depth mm	Pipe centre mm	Pipe centre to wall mm	Face to wall mm	Fixing centres mm	tubes /profiles piece piece	tubes /profiles Sizes mm	Energy E/C/D	Heat outputs btu	watt
AI.642.487.2.S.M.C AI.642.487.3.M.G.C	642 I 487 I 80	455	80-95	95-110	610	3	32	C	684	198
AI.800.487.2.S.M.C AI.800.487.3.M.G.C	800 I 487 I 80	455	80-95	95-110	455	4	32	C	684	198

1.S.I Satinox surface 2.S.M. mirror surface 3.M.G. mirror gold surface
Axle centres are informed according to Evimetal stainless steel valves.
Cross-pipe diameter 16 mm and pprc pipe diameter ½ should be inside screwed to the wall such as mixer connections.
Valves and accessories (page 102) are not included to the price.
Max.working pressure 4 BAR / E: Electrical C:Central Installation.
Plase montage as shown.

Valves and resistances

valves

type	code	description
	KKV.1.S.I.PEX	SATIN SQUARE ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	KKV.1.S.I.PPRC	SATIN SQUARE ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	KKV.2.S.M.PEX	SHINE SQUARE ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	KKV.2.S.M.PPRC	SHINE SQUARE ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	KKV.3.M.G.PEX	GOLD SQUARE ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	KKV.3.M.G.PPRC	GOLD SQUARE ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	YKV.1.S.I.PEX	SATIN ROUND ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	YKV.1.S.I.PPRC	SATIN ROUND ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	YKV.2.S.M.PEX	SHINE ROUND ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	YKV.2.S.M.PPRC	SHINE ROUND ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	YKV.3.M.G.PEX	GOLD ROUND ANGLED BRASS VALVE (COMPATIBLE 16 mm PEX PIPE)
	YKV.3.M.G.PPRC	GOLD ROUND ANGLED BRASS VALVE (COMPATIBLE 1/2 PPRC PIPE)
	BK.16.1.S.I	SATIN 16 mm PEX TUBE CLOSURE PARTS
	BK.16.2.S.M	SHINE 16 mm PEX TUBE CLOSURE PARTS
	BK.16.3.M.G	GOLD 16 mm PEX TUBE CLOSURE PARTS

Hidden Resistance



G.ER - HIDDEN ELECTRIC RESISTANCE

REFERENCES

BAY İNŞAAT - MASLAK 42

TAVROS GROUP - HYATT REGENCY

ZORLU CENTER

ESİN YAPI İSTANBLOOM

NEF RESERVE - YALIKAVAK

EMAAR SQUARE - ÜSKÜDAR

DELTA İNŞAAT SULTAN MAKAMI

DEMSA - MAÇKA STARWOOD OTEL

KUZU EFFECT

SİNPAŞ - OTTOMARE SUITES

AKRO YAPI - GAIA GÖKTÜRK

KOÇ İNŞAAT - İZMİR

HİLTON İZMİR

MANDARİN ORİENTAL HOTEL - BOSPHORUS

KAR İNŞAAT THE CHESME

SWISS HOTEL BODRUM

HABTOOR CITY WESTIN AND W HOTELS, DUBAI.

TOYA YAPI - QENT İSTİNYE

GÜRCİSTAN SHERATON OTEL

SELİN YAPI - RİNGS İSTANBUL

KLK - VALLE LACUS

SEMBOL İNŞAAT - RİXOS BELEK

ARB İNŞAAT - NİSBETİYE 10

G-YOO İSTANBUL

METAL YAPI - COUNTRY LIFE

PALOMA FİNESSE - ANTALYA

UPTOWN INCEK - ANKARA

FOLK ART İZMİR BORNOVA

FOLK ART ÇEŞME

THE MARMARA - TAKSİM

BIAPORT - BURSA

WEST GATE - ANKARA

REFERENCES

LE CHIC - BODRUM

HILTON-HAMPTON-BURSA

BROOKLYN PARK

SHERATON-A LOFT OTEL-BURSA

BAY VİEW (Millenium) BUSİNESS BAY HOTEL, DUBAI

BAKIRKÖY HİLTON

ANT YAPI-ANTORMAN

CEVAHİR YAPI - SHERATON ATAŞEHİR

IC ICTAŞ - HILTON BOMONTI

AKSOY İNŞAAT - CONRAD OTEL

ANTHILL-ANT YAPI

SHANGRI LA HOTEL - ISTANBUL

AŞÇIOĞLU RETRO KONUT PROJESİ

SAVOY PROJESİ-ULUS

AL WATHBA DESERT RESORT, ABU DHABI

ÇEŞME OTELCİLİK - RADISSON BLUE ŞİŞLİ

ADANA RMI

DENİZ İSTANBUL

RIXOS-BOMONTI

NEXT LEVEL - ANKARA

SANTRA ÇAYYOLU UZELLİ TELESES

KOORDİNAT ÇAYYOLU YP İNŞAAT

BÜYÜKYALI İSTANBUL ÖZAK GYO

DOUBLE TREE BY HİLTON KARTEPE

RİVİERA İMPERİAL DELUXE ALANYA

MESA NUROL YEŞİLYAKA RESİM

TARLABAŞI 360 GAP İNŞAAT

YDA SÖĞÜTÖZÜ RESİDENCE

© 2021 All rights reserved.

The images and descriptions in the catalogue are based on technical details applicable at the time the catalogue is printed. Evimetal reserves the right to modify technical details, colors and surfaces for product development purposes.

Evimetal reserves the right to amend and/or supplement the information provided at any time without any notice. Evimetal is not responsible for typographical errors. The prices stated in the catalogue are not binding. Product prices may vary. The current prices of Evimetal shall apply. Vat is not included. Evimetal has filed utility model, design registration and trademark applications for all products. Under the Turkish Commercial Code, the manufacture and sale of duplications is a crime.

Evimetal reserves its right to make any changes in all its products without any notice, with the purpose of research and development. Please select the right colors from the swatch card.

When you buy shower drains, there are some criterias that you should know about in order to find the most appropriate solutions for your projects. In this article, 10 of these crucial points are summarized to help you to choose the best for yourself.

1)Discharge Capacity
One of the most important features about shower drains is their discharge capacity. The evacuation siphon must comply with the EN-1253 standards. The first thing that should be considered when you choose shower drains to buy is choosing siphon type depending on the battery that will be used. If shower and shower heads are being used frequently/intensely, it is better to buy a high capacity siphon. Evimetal shower drains have the 42 l/min and 60 l/min options and it can be increased up to 80% by serial connection.
2) Prevention of Unwanted Odors
One of the most complained subjects is the unwanted odors that are caused by installation. In our products, we use s-siphon which has at least 450-700mg water holding capacity. Besides, it's more durable than regular products (Up to three times). The water that is inside the siphon is being held in a special screen which prevents water decrement in any pressure. In regular systems, sometimes "frematürs" doesn't fit its place and this leads to odors. The reason for this might be the application errors. However, since "frematürs" are not being used and water is s- shaped in a siphon, in s-siphon systems, that is not an issue.
3) Isolation
Incorrect and incomplete isolation for field operators, technical service personnel and users results in high costs. All tests and application works of insulation products used in shower channel and strainer groups are carried out in our factory. Evimetal, shower channel as the first manufacturer in Turkey, more than 20 years of experience gained in the insulation product that best suits your needs, providing you with a special selection of projects to different supervision services for free. If the shower channel and insulation products are not selected correctly, ceramic breakage, installation and re-insulation of the water leakage in the future may cause problems which are difficult to compensate for much higher costs.
4) Easy to apply and maintenance
Evimetal R & D Center examines all the information and international developments in the field and provides the easiest solutions for safe application, easy operation and user-friendly maintenance. The patented stepped lift set developed by Evimetal keeps the body clean, and the sheets are deposited in the Patented Spiral Holder. Thus, the siphon is always used with high capacity.
5) Material quality
Shower Channels may come into contact with different chemicals both after application and after use. These chemicals are corrosive and can cause permanent damage to the material. Evimetal provides maximum corrosion resistance with 1st class certified stainless steels and engineering plastics. All Evimetal shower channels and siphons are tested for tightness.
6) Desing and R & D
Evimetal continues to work as the only company in its product group serving as R & D Center accredited by the Ministry of Industry and Technology. In our R & D center, 15 people work together with our domestic and overseas customers full-time and continue to work for the best product.
7) Durability and warranty
All Evimetal (including stainless steel accents) are guaranteed for 5 years. The raw material used in our products is 304 quality 1st class stainless steel. Because of the different quality of stainless steel in the industry, our company guarantees the 1st class quality certificate of stainless steel. Laboratory analysis reports are obtained with KOSGEB approval upon request. Corrosion resistance according to 304 quality stainless steel norms.
8) Products and measurement options for different applications.
The construction sector is one of the fastest developing sectors in our country, and the experience we have gained in the development of different application areas and products that are suitable for these fields and the applications made in the field are examined and products are designed to minimize construction site environments and user errors. You can get support from our sales engineers for more than 3000 product selection.
9) Interchangeable lid size and siphon option
New type of cutable products developed by Evimetal; The most common dimension mismatch in the application areas, the difficulties between the two walls in the application and aesthetic concerns as a solution to the solution: wall drain, trendline and slimline series can produce products to the desired extent and can be sized safely. System infrastructure plays an important role in efficiency, efficiency and management. Our shower ducts can easily be replaced with a siphon system that can be changed in place, minimum stock and siphon change (in cases where it needs to be changed in place) with a 5 seal safe system.
10) Cost
There are 3 things to consider about cost: infrastructure cost, initial investment cost, total cost of ownership and operation. When choosing your shower channel, you can choose an untested system with plastic casing, no insulation or non-standards. In this case, your initial investment cost will be low. In line with the goal of delivering the best product at the most affordable price, Evimetal may cost a little more than the non-standard products, but many of the features described above will provide significant savings in total ownership and operating costs. Advanced features will significantly increase user satisfaction. Evimetal products do not create extra costs for many years is a separate advantage. Because of the shower channels are long-lasting equipment, we recommend that you consider at least 8 - 10 years when calculating your cost.

General Conditions

1-Sales Conditions
General sales conditions here are valid for all offers and sales agreements that are made by Evimetal Inox Yapı Ürünleri (hereinafter referred to as Evimetal). Customer's different purchase conditions shall be effective after the written consent of Evimetal.

2-Payments and Prices
If it is necessary, Evimetal may demand payment for all or a part of the cost along with the order. VAT is not included in prices and prices may be changed without any notice. Evimetal has the right to demand delay interest for delinquent bills. Delay interest to de demanded shall not be above legal rates. As a result of increases in items such as raw materials, labor force and energy, Evimetal has the right to change prices in its price offer. Exchange rate is calculated according to the selling rate of central bank in the date of the bill. Prices in the sales offer and discounts, if any, are valid for the specified date and eight of change is reserved.

3-Changes in Orders and Amounts
Orders must be given via fax or in written with e-mail. Product code, amendment request, shipment address and information of person who will receive the product must be precisely written. In special productions, as a result of the structure of manufacturing process, +/- differences may occur in production amounts. Evimetal and its customer accept these differences that may arise at reasonable levels in advance. Evimetal may demand additonal operation cost for orders under the amounts in price lists.

4-Shipments. Risks and Cancels
Shipment date of order, specified by Evimetal, shall not be seen as guarantee and must be considered an approximate and estimated date. Evimetal shall not be responsible for risks that may arise from delays as a result of strikes-shut outs, commercial disputes, machine faults, government interventions, natural disasters and other force majeure that is not listed here; and if Evimetal is forced to cancel it, customer shall be liable to pay the cost of the above mentioned product. Customer may cancel the order as a result of delays in delivery date arising from Evimetal however customer shall not demand compensation. All prices of the Evimetal, which are listed, are Evimetal ex-works and shipment costs belong to the buyer. Even if shipment of products, which are sent to the customer from Evimetal's warehouse, belongs to Evimetal, shipment risk belongs to the buyer. Customer shall check the product before accepting it and if there is any damage resulting from shipment (faults in the box opening vs.), customer shall not accept the product and demant product cost from transport company.

5-Qualty, Conformity and Responsibility Exceptions
Customer shall always control if the products he provides from Evimetal are conforms to the intended use. Evimetal guarantees that the products it provides are free of damage. Besides, customer accepts in advance that there may be slight differences in colors, appearance and sizes. All possible defects, damages or feature deficiencies must be reported to Evimetal before the assambly, within 7 days after the product is delivered. After this period Evimetal's responsibility shall only be for unseen defects. Evimetal's decision againts proven defects is certain and unchangeable. In case there is a defect in products provided by Evimetal, Evimetal shall have the responsibility to change its products with heir news or return the product price to its customer. This responsibility shall not be above the payment that is made by the customer for the order. Even if it is mentioned in current laws directly or indirectly; Evimetal shall not be held responsible for damages, personal injuries or deaths that may occur during the usage of the products provided by Evimetal.
6-Returns
Evimetal shall not accept the return of any product that is sold without written approval. Evimetal is free to accept or reject the return. Return of products with special sizes and content, which are produced according to the demand of the customer,is not possible. Shipment risks of products, whose return is approved by Evimetal, belong to the customer who returnedthe product Only intact and unused products are within the spope of returns. When the productyou returned is received by us , it is checked by the related deparment whether it is suitable to return conditions, or not.You must send the product with its in voice and its original package so that it is not damaged. Otherwise no product return shall be made. In case the product to be returned is defective, get information from your sales representative and send with the transport company that Evimetal has an agreement. Excluding Evimetal's faults, in all other causes of return transport cost belongs to the customer
7-Operation Cost
In the shipments with original package, product may be damaged since courier company may stick their label or parcel tape on it and even if the product is delivered with all accessories and its invoice, operation cost is collected because the product will lose its sale ability and can not be sold again. Against operation cost, which will arise when products that are returned in direction of Evimetal's approval need to be stored again, Evimetal shall make out an invoice it the amount of 10%+VAT of the product cost.

8-Usage and Application
Evimetal has made necessary efforts and researches so that the information in the catalogue is correct regarding assembly, usage and technical aspects. Evimetal particularly indicates that it shall not be responsible for losses, damages and harms arising from the usage of explanations and technical information provided, User shall know that information in the catalogue are guiding and shall make the applications in this direction. Faults that may arise from the usage such as environmental conditions during the application and additional materials used shall not be acceptable.

9-Ownership of products
Risk of the products shall be transferred to the customer with the delivery. Besides, even if the cost of products gelivered to the customer is paid with check or bond, Evimetal shall maintain official ownership of the products until the entire price is crllected. When customer receives the products, he accepts in advance that he is only the bailee of the products until he pays the all price and obtains ownership of the products. In case it is necessary, customer shall store these types of products apart from other products that are in his ownership,

10-Patent and Industrial Property Rights
All product designs, branding, packing and literature developed in line with these aspects are under patent and property of Evimetal, aforesaid rights shall not be transferred to the buyer as a result of the sale of the products.

11-Turkish Commercial Code applications
General Sales Conditions listed here are subject to general applications of turkish Commrcial Code. This catalog is subject to copyrights. Evimetal has all the rights regarding the usage of pictures, statments and details. No part of this publication can be copied without permission of Evimetal. Breaches shall be subjected to legal actions.

Evimetal Drain & Profile
Istanbul - Turkey
T : +90 212 475 84 88 Pbx
F : +90 212 475 18 63
E : info@evimetal.com.tr
www.evimetal.com.tr